



Mallia™ Senses
a breath of fresh air





Mallia™ Senses

a breath of fresh air

More aesthetic, more elegant, more functional, Mallia™ Senses enables you to fully express your creativity and style.

Symbol of lightness, thin and sleek, the new Mallia™ Senses range is a breath of fresh air.

Each object is a beautiful whole unto itself.

Mallia™ Senses, let your desire for elegance soar.

- | | | | |
|----|-------------------------|----|----------------------------|
| 4 | A breath of lightness | 18 | A breath of new experience |
| 6 | A breath of elegance | 22 | A breath of freedom |
| 10 | A breath of simplicity | 40 | A perfect match |
| 16 | A breath of versatility | 42 | Products |



Matt White




Matt Black

Mallia™ Senses

a breath of lightness

Absolutely pure, without artifice, the Mallia™ Senses range displays its modernity. Viewed from the front or in profile, its minimalism and lightness capture the eye.

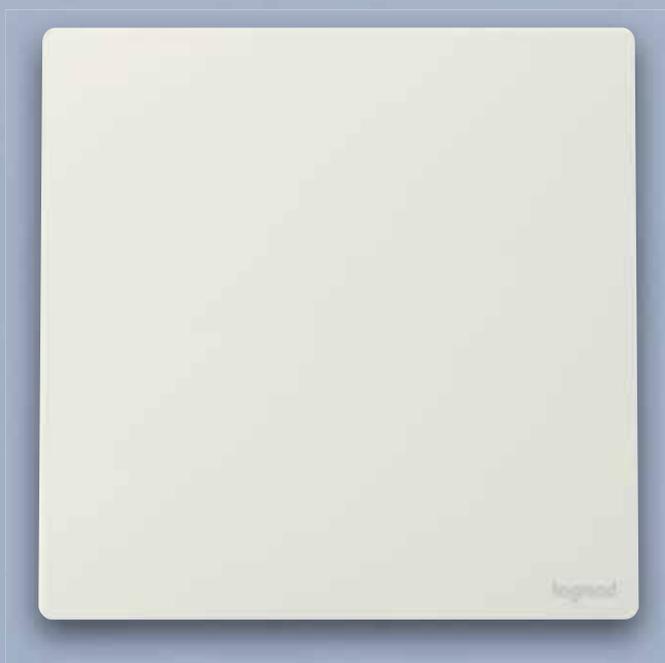

Matt White



Curved profile
Unique slimness

Sensual design

The Mallia™ Senses switch is covered with an integrated rocker. A slight caress on the curve controls the lighting.



reddot winner 2021



Eye-catching or invisible

The minimalist design of the new Mallia™ Senses range pleases from the first glance. The profile of the switch sketches a light curve, soft to the touch and easy on the eye. The range is distinguished by its flat design and unique slimness.



Dark Bronze



Dark Silver

Mallia™ Senses

a breath of elegance

Unleash your creativity.

Compose an interior that suits you with the Mallia™ Senses palette.

Each element is available in three textures and seven colours.

Stand out or blend in, it's up to you

Want to give a touch of sparkle to your interior? Brushed Aluminium or Dark Bronze is a great choice. But what if you prefer a perfect integration? Try Dark Silver or Champagne. Mallia™ Senses switches and sockets are the answer. Your home, your choice.

Do it your way

Combine different finishes while respecting the harmony of colours. For instance, combine a Brushed Black switch with a Matt Black socket. Do whatever you like.



Brushed Aluminium



Matt Black

Brushed Black

Mallia™ Senses

Seven finishes, stunning possibilities

From timeless colours to iconic metal finishes, the choice is yours.

The essentials



Matt Black

Bold and uncompromising, the Matt Black series creates contrast and appeals to the eye. Soft to the touch, its matt finish gives a natural velvet look.



Dark Bronze

The Dark Bronze series shows off its strong character. An ideal choice to embrace the vintage style of a loft or artist's studio.



Dark Silver



Champagne



Matt White

a breath of elegance

Real Metal finishes

Modern and timeless, noble and smooth, with a soft brushed finish, the Brushed Metal series is truly the icon of the Mallia™ Senses range.



Brushed Black
The Brushed Black finish adds a touch of sophistication.



Brushed Aluminium
The Brushed Aluminium finish is incredibly versatile.



Perfect alignment
with fixing support



Metal frame



Mallia™ Senses

a breath of simplicity

The simplicity you've been waiting for, without compromise. The Mallia™ Senses range is as easy to install as it is to use. You'll have more time to admire the perfection of your work.

Easy to install

The Mallia™ Senses range has a robust metal frame and a flush, easy-to-clip wall plate for perfect aesthetics. The advantage: no buckling or misalignment.



Screw terminals opened and ready to wire



Protection in recycled raw material

Easy to order

One catalogue number = one complete product, ready to install.

Mallia™ Senses

Control your lights
with a gentle caress

A maximum of control in a minimum of space
Up to 4-gang with perfect alignment of rockers



1-gang switch



2-gang switch



3-gang switch



4-gang switch

a breath of simplicity

Easy to adapt

Quickly transform a traditional switch into an indicator or locator switch with the warm white or red LED accessory



Discreet

The mechanism is designed to ensure a soft touch and sound.

Mallia™ Senses


Adapt your lighting
according to your needs

Soft touch control

Dim and control dimmable LEDs and CFL, halogen or incandescent lamps with your fingertips. The Mallia™ Senses universal dimmer enables you to create an intimate interior without having to consider the type of load installed.



Rotary dimmer

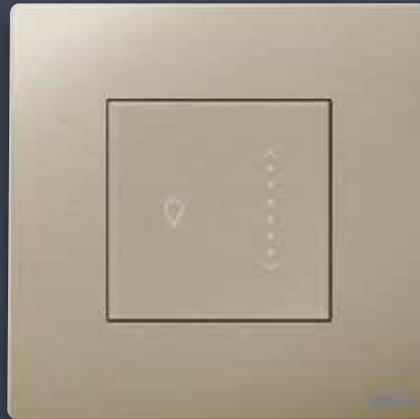

Sliding touch dimmer



a breath of simplicity

Light turns on and off as you walk by

A motion sensor detects your presence and turns on the light.
The light will switch off automatically after a preset time delay.



Sound and light detector



Infra-red movement detector



Double RJ 45 socket



1-gang British standard switched 13A socket with USB Type-A charger



F-type TV socket

Mallia™ Senses

a breath of versatility

Everything your guests need to charge any device.
Connectivity for power and data.



2-gang British standard switched 13A socket with USB Type-A & Type-C dual charger



1-gang British standard switched 13A socket with USB Type-C charger

USB charger socket

The USB charger socket combines a standard socket with the convenience of USB charging: your device plugs straight into the USB port, leaving the standard socket free. No more bulky adapters or juggling with chargers. Equipped with two different USB charging ports, Type-A and Type-C.

With USB Type-C making its way onto our mobile devices, you are prepared for tomorrow – today.



Tamperproof key card switch

A simple and economical solution to efficiently and securely grant access to your guests' rooms experience, using Radio Frequency Identification (RFID) technology. Handy and lightweight for your guests.



Mallia™ Senses

a breath of new experience

Mallia™ Senses, a sense of hospitality.
Offer your guests a warm welcome and effortless control of their comfort.

An easy way to communicate between staff and guest

Room service can announce itself in a friendly manner with the doorbell button. The customer indicates whether or not they wish to have their room cleaned with the "Do Not Disturb/Make Up Room" switch.



Doorbell push-button



Do Not Disturb / Make Up Room Switch

Temperature control

With a simple touch on this touch-sensitive thermostat, your guests can adjust the temperature of their room for perfect comfort.



Room temperature control unit

Mallia™ Senses

Meet
all of your clients' expectations
for safety and connectivity.



Shaver socket

In-room charging station

Sockets with USB Type-A & Type-C charger are popular with guests for charging their smartphone, tablet or any other electronic device without bulky adapters.



2-gang British standard switched 13A socket with USB Type-A & Type-C dual charger



a breath of new experience

Light the way

Make life easy for your guests with automatically controlled lighting. Add a motion sensor and enable your guests to move safely around their room at night with soft, automatic lighting.



Step light with motion sensor



Step light

The Mallia™ Senses range can be completed by the UX for Upscale Hotels range of touch controls. This guest room management system offers guests a connected experience allowing them to easily control the room temperature, lights, roller shutters and badge-operated lock, and to customise scenarios.



Mallia™ Senses

single pole switches



2 810 00BB



2 810 03DS



2 810 05MB



2 810 07MW

Conform to BS EN 60669-1
 Compact mechanism for greater wiring space
 Supplied with 2 screws M 3.5 for BS boxes
 Supplied as complete product with protective film
 Dim.: 86 x 86 mm

Pack	Cat.Nos	Single pole switches 16 AX - 250 V~
5	2 810 00BA	1-gang - 1-way switch  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 00BB	
5	2 810 00CH	
5	2 810 00DB	
5	2 810 00DS	
5	2 810 00MB	
10	2 810 00MW	
5	2 810 01BA	1-gang - 2-way switch  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 01BB	
5	2 810 01CH	
5	2 810 01DB	
5	2 810 01DS	
5	2 810 01MB	
10	2 810 01MW	
5	2 810 08BA	1-gang - intermediate switch  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 08BB	
5	2 810 08CH	
5	2 810 08DB	
5	2 810 08DS	
5	2 810 08MB	
5	2 810 08MW	
5	2 810 02BA	2-gang - 1-way switch  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 02BB	
5	2 810 02CH	
5	2 810 02DB	
5	2 810 02DS	
5	2 810 02MB	
10	2 810 02MW	
5	2 810 03BA	2-gang - 2-way switch  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 03BB	
5	2 810 03CH	
5	2 810 03DB	
5	2 810 03DS	
5	2 810 03MB	
10	2 810 03MW	
5	2 810 04BA	3-gang - 1-way switch  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 04BB	
5	2 810 04CH	
5	2 810 04DB	
5	2 810 04DS	
5	2 810 04MB	
10	2 810 04MW	

Pack	Cat.Nos	Single pole switches 16 AX - 250 V~ (continued)
5	2 810 05BA	3-gang - 2-way switch  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 05BB	
5	2 810 05CH	
5	2 810 05DB	
5	2 810 05DS	
5	2 810 05MB	
10	2 810 05MW	
5	2 810 06BA	4-gang - 1-way switch For boxes with 4 lugs, fold the top and bottom lugs  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 06BB	
5	2 810 06CH	
5	2 810 06DB	
5	2 810 06DS	
5	2 810 06MB	
10	2 810 06MW	
5	2 810 07BA	4-gang - 2-way switch For boxes with 4 lugs, fold the top and bottom lugs  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 07BB	
5	2 810 07CH	
5	2 810 07DB	
5	2 810 07DS	
5	2 810 07MB	
10	2 810 07MW	

Mallia™ Senses

single pole switches (continued)



2 810 10BA



2 810 12CH



2 810 15DS



2 810 69MW

Conform to BS EN 60669-1
 Compact mechanism for greater wiring space
 Supplied with 2 screws M 3.5 for BS boxes
 Supplied as complete product with protective film
 Dim.: 86 x 86 mm

Pack	Cat.Nos	Single pole illuminated switches 16 AX - 250 V~
		Transparent lens To be equipped with warm white or red LED according to the need: indicator or locator (p. 59) The LED is not supplied
5	2 810 10BA	1-gang - 1-way switch <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 10BB	
5	2 810 10CH	
5	2 810 10DB	
5	2 810 10DS	
5	2 810 10MB	
10	2 810 10MW	
5	2 810 11BA	1-gang - 2-way switch <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 11BB	
5	2 810 11CH	
5	2 810 11DB	
5	2 810 11DS	
5	2 810 11MB	
10	2 810 11MW	
5	2 810 09BA	1-gang - intermediate switch <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 09BB	
5	2 810 09CH	
5	2 810 09DB	
5	2 810 09DS	
5	2 810 09MB	
5	2 810 09MW	
5	2 810 12BA	2-gang - 1-way switch <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 12BB	
5	2 810 12CH	
5	2 810 12DB	
5	2 810 12DS	
5	2 810 12MB	
10	2 810 12MW	
5	2 810 13BA	2-gang - 2-way switch <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 13BB	
5	2 810 13CH	
5	2 810 13DB	
5	2 810 13DS	
5	2 810 13MB	
10	2 810 13MW	

Pack	Cat.Nos	Single pole illuminated switches 16 AX - 250 V~ (continued)
5	2 810 14BA	3-gang - 1-way switch <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 14BB	
5	2 810 14CH	
5	2 810 14DB	
5	2 810 14DS	
5	2 810 14MB	
10	2 810 14MW	
5	2 810 15BA	3-gang - 2-way switch <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 15BB	
5	2 810 15CH	
5	2 810 15DB	
5	2 810 15DS	
5	2 810 15MB	
10	2 810 15MW	
		Single pole switches 20 AX - 250 V~
5	2 810 50BA	1-gang - 1-way switch <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 50BB	
5	2 810 50CH	
5	2 810 50DB	
5	2 810 50DS	
5	2 810 50MB	
10	2 810 50MW	
5	2 810 51BA	1-gang - 2-way switch <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 51BB	
5	2 810 51CH	
5	2 810 51DB	
5	2 810 51DS	
5	2 810 51MB	
10	2 810 51MW	
5	2 810 69BA	1-gang - intermediate switch <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 69BB	
5	2 810 69CH	
5	2 810 69DB	
5	2 810 69DS	
5	2 810 69MB	
5	2 810 69MW	

Mallia™ Senses

single pole switches (continued)



2 810 53MW



2 810 55MB

Conform to BS EN 60669-1
Compact mechanism for greater wiring space
Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film
Dim.: 86 x 86 mm

Pack	Cat.Nos	Single pole switches 20 AX - 250 V~ (continued)
5	2 810 52BA	 2-gang - 1-way switch ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 52BB	
5	2 810 52CH	
5	2 810 52DB	
5	2 810 52DS	
5	2 810 52MB	
10	2 810 52MW	
5	2 810 53BA	 2-gang - 2-way switch ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 53BB	
5	2 810 53CH	
5	2 810 53DB	
5	2 810 53DS	
5	2 810 53MB	
10	2 810 53MW	
5	2 810 54BA	 3-gang - 1-way switch For 4 lugs boxes, fold the top and bottom lugs ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 54BB	
5	2 810 54CH	
5	2 810 54DB	
5	2 810 54DS	
5	2 810 54MB	
10	2 810 54MW	
5	2 810 55BA	 3-gang - 2-way switch For 4 lugs boxes, fold the top and bottom lugs ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 55BB	
5	2 810 55CH	
5	2 810 55DB	
5	2 810 55DS	
5	2 810 55MB	
10	2 810 55MW	

Mallia™ Senses

double pole switches



2 810 61BA



2 810 65CH

Conform to BS EN 60669-1
Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film

Pack	Cat.Nos	Double pole switches 20 AX - 250 V~
		Equipped with earth link connector Compact mechanism for greater wiring space Dim.: 86 x 86 mm
5	2 810 60BA	 1-gang - 1-way switch ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 60BB	
5	2 810 60CH	
5	2 810 60DB	
5	2 810 60DS	
5	2 810 60MB	
10	2 810 60MW	
5	2 810 61BA	 1-gang - 1-way switch with red LED power indicator ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 61BB	
5	2 810 61CH	
5	2 810 61DB	
5	2 810 61DS	
5	2 810 61MB	
10	2 810 61MW	
5	2 810 65BA	 2-gang - 1-way switch with red LED power indicator ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 65BB	
5	2 810 65CH	
5	2 810 65DB	
5	2 810 65DS	
5	2 810 65MB	
10	2 810 65MW	

Mallia™ Senses

double pole switches (continued)



2 810 62DB



2 810 66CH



2 810 70BA

Conform to BS EN 60669-1

Supplied with 2 screws M 3.5 for BS boxes

Supplied as complete product with protective film

Pack	Cat.Nos	Double pole switches 20 AX - 250 V \sim (continued)
		Equipped with earth link connector Compact mechanism for greater wiring space Dim.: 86 x 86 mm
		1-gang - 1-way switch with red LED power indicator and "WATER HEATER" marking
5	2 810 62BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 62BB	
5	2 810 62CH	
5	2 810 62DB	
5	2 810 62DS	
5	2 810 62MB	
10	2 810 62MW	
		1-gang - 2-way switch with red LED power indicator and "WATER HEATER" marking
5	2 810 68BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 68BB	
5	2 810 68CH	
5	2 810 68DB	
5	2 810 68DS	
5	2 810 68MB	
10	2 810 68MW	
		1-gang - 1-way switch with red LED power indicator and cable outlet
5	2 810 66BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 66BB	
5	2 810 66CH	
5	2 810 66DB	
5	2 810 66DS	
5	2 810 66MB	
10	2 810 66MW	

Pack	Cat.Nos	Double pole switches 32 A - 250 V \sim
		1-gang - 1-way switch with red LED indicator Dim.: 86 x 86 mm
5	2 810 74BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 74BB	
5	2 810 74CH	
5	2 810 74DB	
5	2 810 74DS	
5	2 810 74MB	
10	2 810 74MW	

Pack	Cat.Nos	Double pole switches 45 A - 250 V \sim
		1-gang - 1-way switch with red LED indicator Dim.: 86 x 86 mm
5	2 810 70BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 70BB	
5	2 810 70CH	
5	2 810 70DB	
5	2 810 70DS	
5	2 810 70MB	
10	2 810 70MW	
		1-gang - 1-way switch with red LED indicator Dim.: 86 x 86 mm
5	2 810 71BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 71BB	
5	2 810 71CH	
5	2 810 71DB	
5	2 810 71DS	
5	2 810 71MB	
10	2 810 71MW	

Mallia™ Senses

electronic switches



2 812 00MB



2 812 40DB

Conform to BS EN 60669-1
 Supplied with 2 screws M 3.5 for BS boxes
 Supplied as complete product with protective film
 Dim.: 86 x 86 mm

Pack	Cat.Nos	Touch switches 16 AX- 250 V~
		For all types of lamps: - LEDs with integrated electronic ballast: max 500 W - Incandescent and halogen lamps 230 VA: max 3000 W - ELV halogen and CFL lamps with separate ferromagnetic ballast: max 2000 VA - ELV halogen and CFL lamps with ferromagnetic or electronic transformer: max 2000 VA - LEDs with separate electronic ballast: max 1250 VA - CFL lamps with integrated electronic ballast: max 600 W - Fluorescent lamps with inductive ballast: max 600 W Standby consumption: 0.1 W 1-gang - 1-way switch with neutral
1	2 812 00BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 812 00BB	
1	2 812 00CH	
1	2 812 00DB	
1	2 812 00DS	
1	2 812 00MB	
1	2 812 00MW	

Pack	Cat.Nos	Touch bell pushes 6 AX- 250 V~
		Operate : - 200 VA magnetic tong bell 1-gang
1	2 812 40BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 812 40BB	
1	2 812 40CH	
1	2 812 40DB	
1	2 812 40DS	
1	2 812 40MB	
1	2 812 40MW	

Mallia™ Senses

push-buttons and roller blind controls



2 810 40DB



2 810 47DS

Compact mechanism for greater wiring space
 Supplied with 2 screws M 3.5 for BS boxes
 Supplied as complete product with protective film
 Dim.: 86 x 86 mm

Pack	Cat.Nos	Push-buttons 10 A - 250 V~	
		Conform to BS EN 60669-1 1-gang - N/O contact (push to make)	
5	2 810 41BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White 	
5	2 810 41BB		
5	2 810 41CH		
5	2 810 41DB		
5	2 810 41DS		
5	2 810 41MB		
10	2 810 41MW		
5	2 810 40BA		 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 40BB		
5	2 810 40CH		
5	2 810 40DB		
5	2 810 40DS		
5	2 810 40MB		
10	2 810 40MW		
5	2 810 42BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White 	
5	2 810 42BB		
5	2 810 42CH		
5	2 810 42DB		
5	2 810 42DS		
5	2 810 42MB		
5	2 810 42MB		
10	2 810 42MW		

Pack	Cat.Nos	Roller blind controls
		Conform to BS EN 60669-2-1 For shutters and curtains control via electronic control unit
5	2 810 47BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 47BB	
5	2 810 47CH	
5	2 810 47DB	
5	2 810 47DS	
5	2 810 47MB	
5	2 810 47MB	
10	2 810 47MW	

Mallia™ Senses

automatic switches



2 810 90CH



2 810 92CH

Conform to BS EN 60669-2-1

Supplied with 2 screws M 3.5 for BS boxes

Supplied as complete product with protective film

Dim.: 86 x 86 mm

Pack	Cat.Nos	Movement detectors
		<p>IR movement detector Horizontal detection angle 120° Luminosity threshold: 3 to 500 lux Detection range: max. 8 m Adjustable time delay: 30 s, 90 s, 180 s</p> <p>Without Neutral For all types of lamps: - LEDs and CFL lamps with integrated electronic ballast: 3 W to 100 W - Incandescent and halogen lamps: 5 W to 400 W - ELV halogen, CFL lamps with separate ferromagnetic ballast: 20 VA to 200 VA - ELV halogen, CFL lamps with separate electronic ballast: 5 VA to 200 VA Standby consumption: 0.02 W</p> <p>With Neutral For all types of lamps: - LEDs and CFL lamps with integrated electronic ballast: max 100 W - Incandescent and halogen lamps: max 400 W - ELV halogen, CFL lamps with separate ferromagnetic ballast: max 200 VA - ELV halogen, CFL lamps with separate electronic ballast: max 200 VA Standby consumption: 0.02 W</p>
1	2 810 90BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 810 90BB	
1	2 810 90CH	
1	2 810 90DB	
1	2 810 90DS	
1	2 810 90MB	
1	2 810 90MW	
1	2 810 91BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 810 91BB	
1	2 810 91CH	
1	2 810 91DB	
1	2 810 91DS	
1	2 810 91MB	
1	2 810 91MW	

Pack	Cat.Nos	Sound and light detectors
		<p>Compact mechanism for greater wiring space Timer switch activated by noise This switch is activated with a sound level of 70 dB minimum The light switches on during 30 second and switches off if no noise is detected If the sound continues, the load will stay on until 30 seconds after it stops</p> <p>Without Neutral For all types of lamps: - LEDs and CFL lamps with integrated electronic ballast: 3 W to 100 W - Incandescent and halogen lamps: 5 W to 400 W - ELV halogen and CFL lamps with separate ferromagnetic ballast: 20 VA to 200 VA - ELV halogen and CFL lamps with separate electronic ballast: 5 VA to 200 VA Standby consumption: 0.02 W</p> <p>With Neutral For all types of lamps: - LEDs and CFL lamps with integrated electronic ballast: max 100 W - Incandescent and halogen lamps: max 400 W - ELV halogen and CFL lamps with separate ferromagnetic ballast: max 200 VA - ELV halogen and CFL lamps with separate electronic ballast: max 200 VA Standby consumption: 0.02 W</p>
1	2 810 92BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 810 92BB	
1	2 810 92CH	
1	2 810 92DB	
1	2 810 92DS	
1	2 810 92MB	
1	2 810 92MW	
1	2 810 93BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 810 93BB	
1	2 810 93CH	
1	2 810 93DB	
1	2 810 93DS	
1	2 810 93MB	
1	2 810 93MW	

Mallia™ Senses

dimmers



2 812 86MB



2 810 86CH



2 810 80DB

Supplied with 2 screws M 3.5 for BS boxes
 Supplied as complete product with protective film
 Dim.: 86 x 86 mm

Pack	Cat.Nos	Dimmers
1	2 812 86BA	<p>Sliding touch dimmer with neutral Conform to BS EN 60669-2-1 For all types of lamps :</p> <ul style="list-style-type: none"> - Dimmable LEDs lamps with integrated electronic ballast (10 lamps max.): max 75 W (Leading); max. 200 W (Trailing) - Incandescent and halogen lamps: max 400 W - ELV halogen and CFL lamps with separate ferromagnetic ballast: max 200 VA - ELV halogen and CFL lamps with separate electronic ballast: max 200 VA - Dimmable CFL lamps with integrated electronic ballast: max 75 W <p>Standby consumption: 0.15 W</p>  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 812 86BB	
1	2 812 86CH	
1	2 812 86DB	
1	2 812 86DS	
1	2 812 86MB	
1	2 812 86MW	
1	2 810 86BA	<p>300 W rotary dimmer without neutral Conform to IEC 60669-2-1 For all types of lamps:</p> <ul style="list-style-type: none"> - Dimmable LEDs: 5 W to 75 W (Leading); 5 W to 200 W (Trailing) - Incandescent and halogen lamps 230 VA: 5 W to 300 W - Dimmable compact fluorescent lamps: 5 W to 75 W - Halogen lamps with ferromagnetic or electronic transformer: 5 VA to 300 VA - Fluorescent tube with integrated electronic ballast: 5 VA to 300 VA <p>Standby consumption: 0.15 W</p>  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 810 86BB	
1	2 810 86CH	
1	2 810 86DB	
1	2 810 86DS	
1	2 810 86MB	
1	2 810 86MW	

Pack	Cat.Nos	Dimmers (continued)
1	2 810 80BA	<p>500 W rotary dimmer without neutral Conform to BS EN 60669-1 For all types of lamps:</p> <ul style="list-style-type: none"> - Incandescent and halogen lamps 230 VA: 40 W to 500 W - ELV halogen lamps with ferromagnetic transformer: 40 VA to 200 VA <p>Use compensator Cat.No 0 401 49 Standby consumption: 0 W</p>  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 810 80BB	
1	2 810 80CH	
1	2 810 80DB	
1	2 810 80DS	
1	2 810 80MB	
1	2 810 80MW	
1	0 401 39	<p>Active compensator</p>  <p>Allows to ensure compatibility of 2-wire electronic lighting controls without neutral with all available types of loads (LEDs, compact fluorescent lamps, ELV halogen lamps with electronic or conventional ballast, 230 V halogen lamps, fluorescent tubes, incandescent lamps) Consumption: 0.4 W</p>

Mallia™ Senses

fan controls, cooker control units and panic buttons



2 810 75DS



2 810 49DS

Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film

Pack	Cat.Nos	Fan speed controls
		Conform to BS EN 60669-2-1 Dim.: 86 x 86 mm 5-speed fan controls 100 W for fan with overall diameter 48"
1	2 810 82BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 810 82BB	
1	2 810 82CH	
1	2 810 82DB	
1	2 810 82DS	
1	2 810 82MB	
1	2 810 82MW	
		Cooker control units 45 A - 250 VA
		Conform to BS 4177 Dim.: 146 x 86 mm 45 A DP switch + 13 A switched socket outlet with red indicator
5	2 810 75BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 75BB	
5	2 810 75CH	
5	2 810 75DB	
5	2 810 75DS	
5	2 810 75MB	
5	2 810 75MW	
		Panic buttons
		1 A resistive - 250 VA Dim.: 86 x 86 mm
1	2 810 49BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 810 49BB	
1	2 810 49CH	
1	2 810 49DB	
1	2 810 49DS	
1	2 810 49MB	
5	2 810 49MW	

Mallia™ Senses

telephone and data sockets



2 811 60MW



2 811 66DS

Compact mechanism for greater wiring space
Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film
Dim.: 86 x 86 mm

Pack	Cat.Nos	Telephone sockets
		RJ 11 sockets - 4 contacts 1/4 turn, tool-less connector
5	2 811 60BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 60BB	
5	2 811 60CH	
5	2 811 60DB	
5	2 811 60DS	
5	2 811 60MB	
5	2 811 60MW	
		Double RJ 11 sockets - 4 contacts 1/4 turn, tool-less connector
5	2 811 63BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 63BB	
5	2 811 63CH	
5	2 811 63DB	
5	2 811 63DS	
5	2 811 63MB	
5	2 811 63MW	
		Telephone and data sockets
		RJ 11 + RJ 45 sockets Cat. 6 UTP
5	2 811 66BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 66BB	
5	2 811 66CH	
5	2 811 66DB	
5	2 811 66DS	
5	2 811 66MB	
5	2 811 66MW	

Mallia™ Senses

data sockets



2 811 59MB



2 811 65BA

Compact mechanism for greater wiring space
 Supplied with 2 screws M 3.5 for BS boxes
 Supplied as complete product with protective film
 Dim.: 86 x 86 mm

Pack	Cat.Nos	Data sockets
		Conform to ISO / IEC 11801 and TIA / EIA 568.2-D
		RJ 45 Cat. 5e UTP
5	2 811 61BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 61BB	
5	2 811 61CH	
5	2 811 61DB	
5	2 811 61DS	
5	2 811 61MB	
5	2 811 61MW	
		RJ 45 Cat. 6 UTP
5	2 811 62BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 62BB	
5	2 811 62CH	
5	2 811 62DB	
5	2 811 62DS	
5	2 811 62MB	
5	2 811 62MW	
		Double RJ 45 Cat. 5e UTP
5	2 811 64BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 64BB	
5	2 811 64CH	
5	2 811 64DB	
5	2 811 64DS	
5	2 811 64MB	
5	2 811 64MW	
		Double RJ 45 Cat. 6 UTP
5	2 811 65BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 65BB	
5	2 811 65CH	
5	2 811 65DB	
5	2 811 65DS	
5	2 811 65MB	
5	2 811 65MW	

Mallia™ Senses

television sockets



2 811 51CH



2 811 52DS

Conform to EN 60728-4 and IEC 67128-2 and European directive
 Supplied with 2 screws M 3.5 for BS boxes
 Supplied as complete product with protective film
 Dim.: 86 x 86 mm

Pack	Cat.Nos	Single television sockets
		For DVBT, cable cast and satellite installation (with individual demodulator) DVBT HDTV compatible TV: male connector (Ø 9.5 mm) R: female connector (Ø 9.5 mm) SAT: "F" type connector Recommended coaxial cable 17 VATC
		Female TV sockets - star attenuation < 1 dB TV: 0-2400 MHz Installation recommended in flush-mounting box depth 40 mm
5	2 811 51BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 51BB	
5	2 811 51CH	
5	2 811 51DB	
5	2 811 51DS	
5	2 811 51MB	
10	2 811 51MW	
		TV sockets "F" type with screws - star attenuation < 1 dB SAT: 0-2400 MHz
5	2 811 52BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 52BB	
5	2 811 52CH	
5	2 811 52DB	
5	2 811 52DS	
5	2 811 52MB	
10	2 811 52MW	

Mallia™ Senses

audio and video sockets



2 810 31CH



2 810 21MB

Supplied with 2 screws M 3.5 for BS boxes
 Supplied as complete product with protective film

Pack	Cat.Nos	Audio and video sockets
		Dim.: 86 x 86 mm Single loudspeaker sockets 4 mm ² terminals Brass connectors ensure excellent sound transmission quality
1	2 810 31BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 810 31BB	
1	2 810 31CH	
1	2 810 31DB	
1	2 810 31DS	
1	2 810 31MB	
5	2 810 31MW	
		Double loudspeaker sockets 4 mm ² terminals Brass connectors ensure excellent sound transmission quality
1	2 810 32BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 810 32BB	
1	2 810 32CH	
1	2 810 32DB	
1	2 810 32DS	
1	2 810 32MB	
5	2 810 32MW	
		HDMI Type-A sockets + USB Type-A data sockets Used to bring connections closer to the users and to transmit high-definition digital audio video streams between a source (Blu-Ray player, computer) and a compatible receiver (e.g. TV, videoprojector) and with connecting USB devices (interactive white board, scanner-printer, external hard disk)
1	2 810 21BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 810 21BB	
1	2 810 21CH	
1	2 810 21DB	
1	2 810 21DS	
1	2 810 21MB	
5	2 810 21MW	

Mallia™ Senses

British standard socket outlets



2811 11BA



2811 15CH



2811 17MB

Supplied with 2 screws M 3.5 for BS boxes
 All sockets integrate child protection
 Supplied as complete product with protective film

Pack	Cat.Nos	British standard single pole socket outlets 13 A - 250 V~
		Conform to BS 1363-2
		1-gang - unswitched Dim.: 86 x 86 mm
5	2811 10BA	● Brushed Aluminium
5	2811 10BB	● Brushed Black
5	2811 10CH	● Champagne
5	2811 10DB	● Dark Bronze
5	2811 10DS	● Dark Silver
5	2811 10MB	● Matt Black
10	2811 10MW	○ Matt White
		2-gang - unswitched Dim.: 146 x 86 mm
5	2811 12BA	● Brushed Aluminium
5	2811 12BB	● Brushed Black
5	2811 12CH	● Champagne
5	2811 12DB	● Dark Bronze
5	2811 12DS	● Dark Silver
5	2811 12MB	● Matt Black
5	2811 12MW	○ Matt White
		1-gang - switched Dim.: 86 x 86 mm
5	2811 11BA	● Brushed Aluminium
5	2811 11BB	● Brushed Black
5	2811 11CH	● Champagne
5	2811 11DB	● Dark Bronze
5	2811 11DS	● Dark Silver
5	2811 11MB	● Matt Black
10	2811 11MW	○ Matt White
		1-gang - switched with red LED power indicator Dim.: 86 x 86 mm
5	2811 14BA	● Brushed Aluminium
5	2811 14BB	● Brushed Black
5	2811 14CH	● Champagne
5	2811 14DB	● Dark Bronze
5	2811 14DS	● Dark Silver
5	2811 14MB	● Matt Black
10	2811 14MW	○ Matt White
		2-gang - switched Dim.: 146 x 86 mm
5	2811 13BA	● Brushed Aluminium
5	2811 13BB	● Brushed Black
5	2811 13CH	● Champagne
5	2811 13DB	● Dark Bronze
5	2811 13DS	● Dark Silver
5	2811 13MB	● Matt Black
5	2811 13MW	○ Matt White
		2-gang - switched with red LED power indicator Dim.: 146 x 86 mm
5	2811 15BA	● Brushed Aluminium
5	2811 15BB	● Brushed Black
5	2811 15CH	● Champagne
5	2811 15DB	● Dark Bronze
5	2811 15DS	● Dark Silver
5	2811 15MB	● Matt Black
5	2811 15MW	○ Matt White

Pack	Cat.Nos	British standard double pole socket outlets 13 A - 250 V~
		Conform to BS 1363-2
		1-gang - switched Dim.: 86 x 86 mm
5	2811 16BA	● Brushed Aluminium
5	2811 16BB	● Brushed Black
5	2811 16CH	● Champagne
5	2811 16DB	● Dark Bronze
5	2811 16DS	● Dark Silver
5	2811 16MB	● Matt Black
10	2811 16MW	○ Matt White
		1-gang - switched with red LED power indicator Dim.: 86 x 86 mm
5	2811 18BA	● Brushed Aluminium
5	2811 18BB	● Brushed Black
5	2811 18CH	● Champagne
5	2811 18DB	● Dark Bronze
5	2811 18DS	● Dark Silver
5	2811 18MB	● Matt Black
10	2811 18MW	○ Matt White
		2-gang - switched Dim.: 146 x 86 mm
5	2811 17BA	● Brushed Aluminium
5	2811 17BB	● Brushed Black
5	2811 17CH	● Champagne
5	2811 17DB	● Dark Bronze
5	2811 17DS	● Dark Silver
5	2811 17MB	● Matt Black
5	2811 17MW	○ Matt White
		2-gang - switched with red LED power indicator Dim.: 146 x 86 mm
5	2811 19BA	● Brushed Aluminium
5	2811 19BB	● Brushed Black
5	2811 19CH	● Champagne
5	2811 19DB	● Dark Bronze
5	2811 19DS	● Dark Silver
5	2811 19MB	● Matt Black
5	2811 19MW	○ Matt White

Mallia™ Senses


British standard socket outlets (continued)



2 811 34MW



2 811 30BA



2 811 36DB



2 811 28DS

Supplied with 2 screws M 3.5 for BS boxes
All sockets integrate child protection
Supplied as complete product with protective film

Pack	Cat.Nos	British standard socket outlets - 13 A - 250 V \sim with USB charger
		Conform to BS 1363-2 USB charger conform to IEC 62368-1 Consumption in passive mode < 0.08 W 1-gang single pole switched with USB Type-A 2.4 A - 5 V \equiv - 12 W Dim.: 86 x 86 mm
1	2 811 34BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 811 34BB	
1	2 811 34CH	
1	2 811 34DB	
1	2 811 34DS	
1	2 811 34MB	
1	2 811 34MW	
1	2 811 30BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 811 30BB	
1	2 811 30CH	
1	2 811 30DB	
1	2 811 30DS	
1	2 811 30MB	
1	2 811 30MW	
1	2 811 33BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 811 33BB	
1	2 811 33CH	
1	2 811 33DB	
1	2 811 33DS	
1	2 811 33MB	
1	2 811 33MW	
1	2 811 31BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 811 31BB	
1	2 811 31CH	
1	2 811 31DB	
1	2 811 31DS	
1	2 811 31MB	
1	2 811 31MW	

Pack	Cat.Nos	British standard socket outlets - 13 A - 250 V \sim with USB charger (continued)
		2-gang single pole switched with USB Type-A + Type-C 3 A - 5 V \equiv - 15 W Consumption in passive mode < 0.08 W Dim.: 146 x 86 mm
1	2 811 36BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 811 36BB	
1	2 811 36CH	
1	2 811 36DB	
1	2 811 36DS	
1	2 811 36MB	
1	2 811 36MW	
		Conform to BS 546 Dim.: 86 x 86 mm
		1-gang - switched
5	2 811 28BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 28BB	
5	2 811 28CH	
5	2 811 28DB	
5	2 811 28DS	
5	2 811 28MB	
5	2 811 28MW	
10	2 811 28MW	
		1-gang - switched with red LED power indicator
5	2 811 29BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 29BB	
5	2 811 29CH	
5	2 811 29DB	
5	2 811 29DS	
5	2 811 29MB	
5	2 811 29MW	
10	2 811 29MW	
		British standard socket outlets 5 A - 250 V \sim
		Conform to BS 546 Dim.: 86 x 86 mm
		1-gang - switched
5	2 811 32BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 32BB	
5	2 811 32CH	
5	2 811 32DB	
5	2 811 32DS	
5	2 811 32MB	
5	2 811 32MW	
10	2 811 32MW	

Mallia™ Senses

fused connection units



2 811 40MW



2 811 42MB

Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film
Dim.: 86 x 86 mm

Pack	Cat.Nos	13 A fused connection units
		Conform to BS 1363: Part 4
		Unswitched
5	2 811 40BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 40BB	
5	2 811 40CH	
5	2 811 40DB	
5	2 811 40DS	
5	2 811 40MB	
10	2 811 40MW	
		Unswitched with red LED power indicator
5	2 811 49BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 49BB	
5	2 811 49CH	
5	2 811 49DB	
5	2 811 49DS	
5	2 811 49MB	
10	2 811 49MW	
		Switched
5	2 811 41BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 41BB	
5	2 811 41CH	
5	2 811 41DB	
5	2 811 41DS	
5	2 811 41MB	
10	2 811 41MW	
		Switched with red LED power indicator
5	2 811 42BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 42BB	
5	2 811 42CH	
5	2 811 42DB	
5	2 811 42DS	
5	2 811 42MB	
10	2 811 42MW	

Mallia™ Senses

Euro-US and German standards socket outlets



2 811 04DB



2 811 26DS

Supplied with 2 screws M 3.5 for BS boxes
All sockets integrate child protection
Supplied as complete product with protective film

Pack	Cat.Nos	Euro-US standard socket outlets - 16 A - 250 V~
		Dim.: 86 x 86 mm
		1-gang 2P+E
5	2 811 03BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 03BB	
5	2 811 03CH	
5	2 811 03DB	
5	2 811 03DS	
5	2 811 03MB	
10	2 811 03MW	
		1-gang duplex 2P+E
5	2 811 04BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 04BB	
5	2 811 04CH	
5	2 811 04DB	
5	2 811 04DS	
5	2 811 04MB	
10	2 811 04MW	
		1-gang duplex switched 2P
5	2 811 24BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 24BB	
5	2 811 24CH	
5	2 811 24DB	
5	2 811 24DS	
5	2 811 24MB	
10	2 811 24MW	
		Euro-US standard socket outlets - 16 A - 250 V~ with USB charger
		USB charger conform to IEC 62368-1
		1-gang duplex single pole + USB Type-A + Type-C
		3.1 A - 5 V~ - 15 W Consumption in passive mode < 0.08 W Dim.: 86 x 146 mm
1	2 812 04BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 812 04BB	
1	2 812 04CH	
1	2 812 04DB	
1	2 812 04DS	
1	2 812 04MB	
1	2 812 04MW	
		German standard socket outlets - 16 A - 250 V~
		1-gang 2P+E
		Dim.: 86 x 86 mm
5	2 811 26BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 26BB	
5	2 811 26CH	
5	2 811 26DB	
5	2 811 26DS	
5	2 811 26MB	
10	2 811 26MW	

Mallia™ Senses

multistandard socket outlets



2 811 25DS



2 811 23BB

Supplied with 2 screws M 3.5 for BS boxes
All sockets integrate child protection
Supplied as complete product with protective film

Pack	Cat.Nos	Multistandard switched socket outlets - 16 A - 250 V / 15 A - 127 V	
5	2 811 20BA	1-gang 2P+E Dim.: 86 x 86 mm  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White 	
5	2 811 20BB		
5	2 811 20CH		
5	2 811 20DB		
5	2 811 20DS		
5	2 811 20MB		
10	2 811 20MW		
5	2 811 22BA		2-gang 2P+E Dim.: 146 x 86 mm  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 22BB		
5	2 811 22CH		
5	2 811 22DB		
5	2 811 22DS		
5	2 811 22MB		
10	2 811 22MW		

Pack	Cat.Nos	Multistandard socket outlets 16 A - 250 V~ / 15 A - 127 V~ with USB charger
1	2 811 21BA	USB charger conform to IEC 62368-1 2P+E - 1-gang switched + USB Type-A 2.4 A - 5 V _{DC} - 12 W Consumption in passive mode < 0.08 W Dim.: 86 x 86 mm  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 811 21BB	
1	2 811 21CH	
1	2 811 21DB	
1	2 811 21DS	
1	2 811 21MB	
1	2 811 21MW	
1	2 811 25BA	2P+E - 1-gang switched + USB Type-C 3 A - 5 V _{DC} - 15 W Consumption in passive mode < 0.08 W Dim.: 86 x 86 mm  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 811 25BB	
1	2 811 25CH	
1	2 811 25DB	
1	2 811 25DS	
1	2 811 25MB	
1	2 811 25MW	
1	2 811 23BA	2x2P+E - 2-gang switched + USB Type-A + Type-C 3 A - 5 V _{DC} - 15 W Consumption in passive mode < 0.08 W Dim.: 146 x 86 mm  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 811 23BB	
1	2 811 23CH	
1	2 811 23DB	
1	2 811 23DS	
1	2 811 23MB	
1	2 811 23MW	

Mallia™ Senses

cable outlets



2 811 47MB

Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film
Dim.: 86 x 86 mm

Pack	Cat.Nos	Cable outlets	
10	2 811 47BA	Conform to BS 5733 20 A  <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White 	
10	2 811 47BB		
10	2 811 47CH		
10	2 811 47DB		
10	2 811 47DS		
10	2 811 47MB		
10	2 811 47MW		
5	2 811 48CH		45 A  <ul style="list-style-type: none"> ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 48DB		
5	2 811 48DS		
5	2 811 48MB		
5	2 811 48MW		



2 810 39BB




2 811 35DB



2 810 45BB

Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film

Pack	Cat.Nos	RFID key card switches
		For energizing a circuit for example meeting room, office, hotel room, etc. Works only with ISO type contactless key card or other ISO type 13.56 MHz key card Time-delay of approx. 30 sec. after card removal Lighting of the slot by LED Dim.: 86 x 86 mm
1	2 810 22BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 810 22BB	
1	2 810 22CH	
1	2 810 22DB	
1	2 810 22DS	
1	2 810 22MB	
1	2 810 22MW	
1	2 810 39BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 810 39BB	
1	2 810 39CH	
1	2 810 39DB	
1	2 810 39DS	
1	2 810 39MB	
1	2 810 39MW	
10	0 767 11	Key card For RFID key card switches  MIFARE contactless badge card ISO format (50 x 80 mm) Chip: 13.56 MHz Standard 1 KB memory

Pack	Cat.Nos	Shaver sockets
		Conform to BS EN 61558-2-5, IP24 For use with European, British, American, Australian 2-pin plugs Screwless live and neutral terminals Double wound isolating transformer Automatic self-resetting overload feature Plug insertion operates micro-switch which energises transformer For flush-mounting boxes, use BS 2-gang box depth 48 mm Power supply: 230 V - 50/60 Hz Dim.: 86 x 150 mm
1	2 811 35BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
1	2 811 35BB	
1	2 811 35CH	
1	2 811 35DB	
1	2 811 35DS	
1	2 811 35MB	
1	2 811 35MW	
		Hotel bedroom control units Enable the resident to inform hotel staff of the room status Two settings are possible: - Do not disturb - Make up room Dim.: 86 x 86 mm 1-gang - Do not disturb / Make up room and bell push-button Installed in the corridor, displays calls Indicator lamp and bell push Supplied with LED
5	2 810 45BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 45BB	
5	2 810 45CH	
5	2 810 45DB	
5	2 810 45DS	
5	2 810 45MB	
10	2 810 45MW	
5	2 810 46BA	 <ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 46BB	
5	2 810 46CH	
5	2 810 46DB	
5	2 810 46DS	
5	2 810 46MB	
10	2 810 46MW	

Mallia™ Senses

step lights and room temperature control units



2 810 97MB



2 810 23MB

Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film
Dim.: 86 x 86 mm

Pack	Cat.Nos	Step lights
		Low output step light with LED Ideal to illuminate a corridor at night without dazzling people, or to highlight possible danger Voltage: 250 V Power: < 1 W
		Without motion detector
1	2 810 97BA	● Brushed Aluminium
1	2 810 97BB	● Brushed Black
1	2 810 97CH	● Champagne
1	2 810 97DB	● Dark Bronze
1	2 810 97DS	● Dark Silver
1	2 810 97MB	● Matt Black
1	2 810 97MW	○ Matt White
		With motion detector Mechanism equipped with an infrared detection cell and a LED beam Equipped with an audible signal that can be deactivated (when product is used for lighting) or not (so as to indicate danger) Horizontal detection angle: 120° Luminosity threshold: dusk: 15 Lux, night: 3 Lux Detection range: max. 8m Light adjust.: High, Mid, Low Adjustable time delay: 30s, 60s, 120s Voltage: 250 V Power: < 1 W
1	2 810 96BA	● Brushed Aluminium
1	2 810 96BB	● Brushed Black
1	2 810 96CH	● Champagne
1	2 810 96DB	● Dark Bronze
1	2 810 96DS	● Dark Silver
1	2 810 96MB	● Matt Black
1	2 810 96MW	○ Matt White
		Room temperature control units
		Allows you to adjust and monitor the temperature in the rooms precisely and accurately with a tactile touch It can control an Air Conditioning System Power supply: 250V~ 50/60Hz Adjustable temperature range from 5°C to 35°C Temperature accuracy: +/- 1°C Load type: magnetic valve/motor operated valve with 1A capacity Temperature sensor: internal NTC Power consumption: < 1W
1	2 810 23CH	● Champagne
1	2 810 23DS	● Dark Silver
1	2 810 23MB	● Matt Black
1	2 810 23MW	○ Matt White


UX for Upscale hotels room management



Mallia™ Senses

hotel equipment

Guest Room Management System

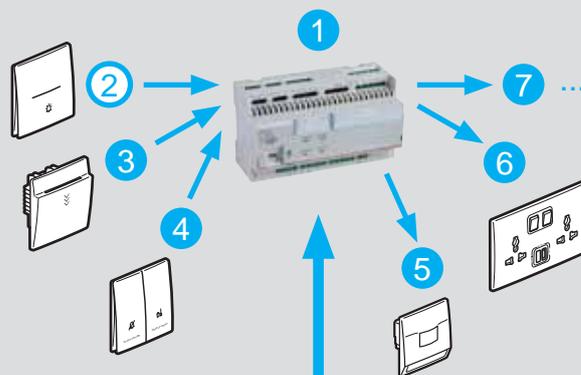

The Room controller unit, Cat. No. 0 484 08 or 0 484 12, associated with mechanical Mallia™ Senses functions can manage the lights, sockets, ventilation and curtains independently in each room. It can be integrated with the Building Management System (BMS) and the Property Management System (PMS) in order to enable a global management of the building and the hotel's operations.

For further information on Room controller, please contact us



Mallia™ Senses

adaptors and blanking plates



2 811 95MW



2 811 90DS



2 811 92BA + 5 725 72

Supplied with 2 screws M 3.5 for BS boxes
Supplied as complete product with protective film

Pack	Cat.Nos	Keystone adaptors
		Dim.: 86 x 86 mm
		Single
5	2 811 94BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 94BB	
5	2 811 94CH	
5	2 811 94DB	
5	2 811 94DS	
5	2 811 94MB	
10	2 811 94MW	
		Double
5	2 811 95BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 95BB	
5	2 811 95CH	
5	2 811 95DB	
5	2 811 95DS	
5	2 811 95MB	
10	2 811 95MW	

Pack	Cat.Nos	Blanking plates
		1-gang
		Dim.: 86 x 86 mm
5	2 811 90BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 90BB	
5	2 811 90CH	
5	2 811 90DB	
5	2 811 90DS	
5	2 811 90MB	
10	2 811 90MW	
		2-gang
		Dim.: 146 x 86 mm
5	2 811 91BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 91BB	
5	2 811 91CH	
5	2 811 91DB	
5	2 811 91DS	
5	2 811 91MB	
5	2 811 91MW	

Pack	Cat.Nos	Arteor adaptors
		Allow the integration of 2-module Arteor mechanisms such as reading lights, USB chargers, South African standard sockets, etc.
		1-gang - 2 modules
		Dim.: 86 x 86 mm
5	2 811 92BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 92BB	
5	2 811 92CH	
5	2 811 92DB	
5	2 811 92DS	
5	2 811 92MB	
10	2 811 92MW	
		2-gang - 2 modules
		Dim.: 146 x 86 mm
5	2 811 93BA	<ul style="list-style-type: none"> ● Brushed Aluminium ● Brushed Black ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 811 93BB	
5	2 811 93CH	
5	2 811 93DB	
5	2 811 93DS	
5	2 811 93MB	
10	2 811 93MW	

For integration of Arteor functions, see Arteor offer



Mallia™ Senses



fixing supports and lamps



2 810 20MB



2 819 97ACC

Pack	Cat.Nos	Fixing supports
		<p>For multi-gang installation To be installed on the boxes to allow a perfect alignment of products and a regular gap between functions Distance between boxes: 86 mm Compatible only with 86 x 86 mm dimensions products (except sockets with integrated USB charger)</p> <p>2-gang Dim.: 172 x 86 mm</p>  <ul style="list-style-type: none"> ● Aluminium ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White <p>3-gang Dim.: 258 x 86 mm</p>  <ul style="list-style-type: none"> ● Aluminium ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White <p>4-gang Dim.: 344 x 86 mm</p>  <ul style="list-style-type: none"> ● Aluminium ● Champagne ● Dark Bronze ● Dark Silver ● Matt Black ○ Matt White
5	2 810 18BA	
5	2 810 18CH	
5	2 810 18DB	
5	2 810 18DS	
5	2 810 18MB	
5	2 810 18MW	
5	2 810 19BA	
5	2 810 19CH	
5	2 810 19DB	
5	2 810 19DS	
5	2 810 19MB	
5	2 810 19MW	
5	2 810 20BA	
5	2 810 20CH	
5	2 810 20DB	
5	2 810 20DS	
5	2 810 20MB	
5	2 810 20MW	

Pack	Cat.Nos	Lamps
10	2 819 97ACC	For locator use 230 V warm white LED
10	2 819 98ACC	For indicator use 230 V red LED
10	2 819 96ACC	12 V red LED Compatible with GRMS



Head Office:

Jl. Pantai Indah Selatan
Komplek Pergudangan
Sentra Industri PIK A No. 6
Jakarta Utara 14470 - Indonesia
Telp :(+62) 5081 3081
Fax :(+62) 5081 3091
E-mail:sales.indonesia@legrand.co.id

Bandung:

Jl. Prof. Surya Sumantri Kav 5E
Bandung 40152 - Indonesia
Telp:(+62) 200 8979
E-mail: legrand.bandung@legrand.co.id

Surabaya:

Graha Pena Lantai 14, Suite 1407
Jl. A Yani 88 - Surabaya 60234
Telp :(+62-31) 3360 1221
E-mail: legrand.surabaya@legrand.co.id

Medan:

Jl. Thamrin 20B
Medan - Indonesia
Telp :(+62) 451 7396. 451 7431
Fax :(+62) 451 7431
E-mail: legrand.medan@legrand.co.id

FOLLOW US
ALSO ON

-  legrand.com
-  youtube.com/user/legrand
-  twitter.com/legrand_news
-  pinterest.com/legrandgroup