



A small all-rounder


The round floor socket GES R2

With eight different cover variants in plastic and metal, the GES R2 floor socket can be integrated seamlessly into many different floor coverings. In addition, the metal variants with a protection class of IP66 are also suitable for the use in wet-care floors.

Metal



Jet black



Nickel-oxidised



Old copper



Chrome



Old brass



Nickel


Plastic



Graphite-black




Iron grey

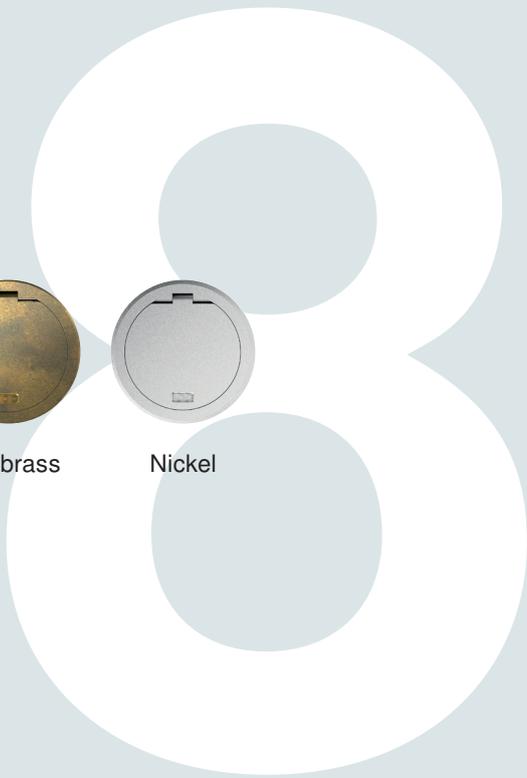



A simple design, high-quality material, extremely sturdy – the round floor socket (GES R2) can be used in all those areas where only small and individual supply points in the floor are required. Thanks to its modular construction consisting of height-adjustable screed cassette, installation box and cover, the round floor socket's use is versatile – from a residential home to a car sales room.

IP
66

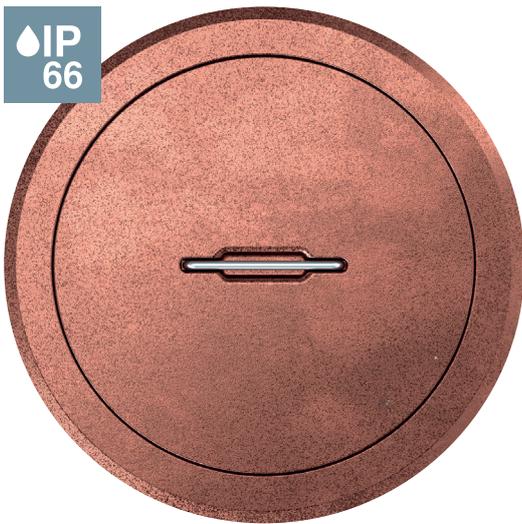


Hinged cover with
snap-in slider

Tube with handle



Blanking lid

The different types of cover openings mean that they can be adapted to the use or cleaning of floors. There is also a variant available with access protection for the use in public spaces.

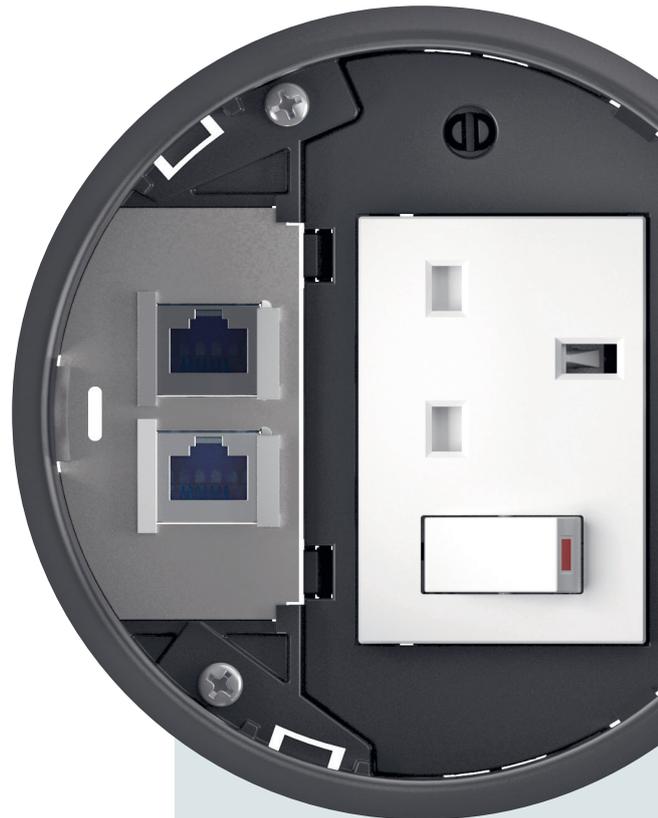

The GES R2 floor socket has room for two Modul45 units and two data technology connections. Despite its diameter of just 140 mm it has a remarkably spacious interior.

320 Serangoon Road #09-13
Centrium Square
Singapore 218108

Phone: +65 6385 5805
customerservice@obo.sg
www.obo-bettermann.sg



Watch installation
video here