

**KÄRCHER**

**DATA SHEET**



## BRC 45/45 C

Compact carpet cleaning machine for the deep and intermediate cleaning of medium-sized areas from 350 up to 1000 m<sup>2</sup>. Forward and reverse cleaning direction with 2 contra-rotating roller brushes for fibre-deep cleanliness.



### Order no.

1.008-056.0

- For medium-sized areas
- Works forwards and backwards
- Two contra-rotating roller brushes with constant contact pressure.

### Technical data

|   |                        |                   |
|---|------------------------|-------------------|
| <b>EAN code</b>   |                        | 4039784497986     |
| <b>Area performance (deep cleaning / intermediate cleaning iCapsol)</b> | <b>m<sup>2</sup>/h</b> | 350 / 1000        |
| <b>Air flow</b>   | <b>l/s</b>             | 45                |
| <b>Vacuum</b>   | <b>mbar / kPa</b>      | 300 / 30          |
| <b>Spray pressure for intermediate cleaning</b>                         | <b>bar</b>             | 3.5               |
| <b>Spray pressure for deep cleaning</b>                                 | <b>bar</b>             | 7                 |
| <b>Spray rate for intermediate cleaning</b>                             | <b>l/min</b>           | 0.7               |
| <b>Spray rate for deep cleaning</b>                                     | <b>l/min</b>           | 3.2               |
| <b>Working width, vacuuming</b>   | <b>mm</b>              | 450               |
| <b>Tank of fresh/dirty water</b>  | <b>l</b>               | 45 / 38           |
| <b>Turbine capacity</b>   | <b>W</b>               | 1100              |
| <b>Motor rating of brush motor</b>                                      | <b>W</b>               | 600               |
| <b>Weight without accessories</b>                                       | <b>kg</b>              | 75                |
| <b>Dimensions (L × W × H)</b>   | <b>mm</b>              | 1029 × 559 × 1092 |

### Equipment

|                          |                 |                      |
|--------------------------|-----------------|----------------------|
| <b>Work direction</b>    |                 | Forward or backwards |
| <b>iCapsol mode</b>      |                 | ■                    |
| <b>Number of rollers</b> | <b>Piece(s)</b> | 2                    |

■ Included in the scope of supply.

Users must receive training on this device.



## **Floating brush head with contra-rotating roller brushes**

- Two roller brushes for high cleaning performance.
- Simultaneously cleans deep into the pile from two sides.
- Ensures uniform floor contact also on uneven surfaces.



## **Working direction, forwards or backwards**

- Working direction adjustable to carpet.
- Cleaning direction selectable by folding push handle.
- Ergonomic working position for carpet cleaning – forwards and backwards.

## ACCESSORIES FOR BRC 45/45 C 1.008-056.0



|                                      | Order no.     | Description   |   |
|--------------------------------------|---------------|---|---|
| <b>ROLLER BRUSHES</b>                |               |   |   |
| Roller brush, 450 mm                 | 1 8.621-605.0 | Standard, black, 2 required.  | ■ |
|                                      | 2 8.629-552.0 | Soft, 2 required. For hard carpets such as needle felt or short loop-pile carpets.  | □ |
| <b>CARPET CLEANERS</b>               |               |   |   |
| <b>Other accessories</b>             |               |   |   |
| Adapter                              | 3 8.631-030.0 | For floor tool 4.130-061.0 and handle with trigger 4.130-163.0.   | ■ |
| <b>SPRAY EXTRACTION MACHINES</b>     |               |   |   |
| <b>Upholstery tools</b>              |               |   |   |
| Hand nozzle                          | 4 4.130-163.0 | For cleaning upholstery with Puzzi 400/E and Puzzi 400 K, with water flow reducer 3.637-029.0 – except Puzzi 400 K.             | □ |
| <b>Spray/suction hoses</b>           |               |   |   |
| Spray/suction hose, 4.0 m, Puzzi 400 | 5 4.440-644.0 | Spray/suction hose with a length of 4 m and a metal coupling. Suitable for the Puzzi 400 spray extraction cleaner from Kärcher. | □ |

■ Included in the scope of supply. □ Available accessories.

## BRC 40/22 C

Compact BRC 40/22 C carpet cleaner for economic and rapid spray extraction or intermediate cleaning of carpeted surfaces of between 250 and 1,000 m<sup>2</sup>.



**Order no.** 1.008-062.0

- Forwards working direction
- Contact pressure and brush pressure can be adjusted to the degree of soiling or fibre height.
- Compact, for small to medium-sized surfaces

### Technical data


|   |                   |                  |
|---|-------------------|------------------|
| <b>EAN code</b>   |                   | 4054278211701    |
| <b>Area performance (deep cleaning / intermediate cleaning iCapsol)</b> | m <sup>2</sup> /h | 500 / 900        |
| <b>Air flow</b>   | l/s               | 47               |
| <b>Vacuum</b>   | mbar / kPa        | 290 / 29         |
| <b>Spray pressure for intermediate cleaning</b>                         | bar               | 3.5              |
| <b>Spray pressure for deep cleaning</b>                                 | bar               | 7                |
| <b>Spray rate for intermediate cleaning</b>                             | l/min             | 0.38             |
| <b>Spray rate for deep cleaning</b>                                     | l/min             | 2.5              |
| <b>Working width, vacuuming</b>   | cm                | 48               |
| <b>Tank of fresh/dirty water</b>  | l                 | 22 / 19          |
| <b>Turbine capacity</b>   | W                 | 1200             |
| <b>Motor rating of brush motor</b>                                      | W                 | 400              |
| <b>Weight without accessories</b>                                       | kg                | 44.5             |
| <b>Weight incl. packaging</b>   | kg                | 50.5             |
| <b>Dimensions (L × W × H)</b>   | mm                | 889 × 470 × 1118 |

### Equipment

|                          |          |          |
|--------------------------|----------|----------|
| <b>Work direction</b>    |          | Forwards |
| <b>iCapsol mode</b>      |          | ■        |
| <b>Number of rollers</b> | Piece(s) | 1        |

■ Included in the scope of supply.

Users must receive training on this device.

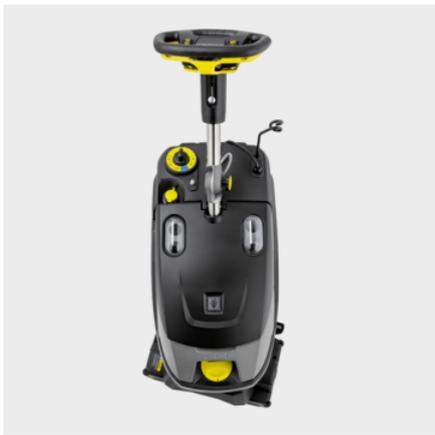


## 200° rotatable cleaning head

- A carpet roller brush supports thorough cleaning.
- Extremely easy to manoeuvre even on cluttered surfaces.



## For deep and intermediate carpet cleaning

- For both deep cleaning and intermediate cleaning applications on carpets.
- Deep cleaning of carpets with the cleaning roller supports cleaning of carpet fibres.

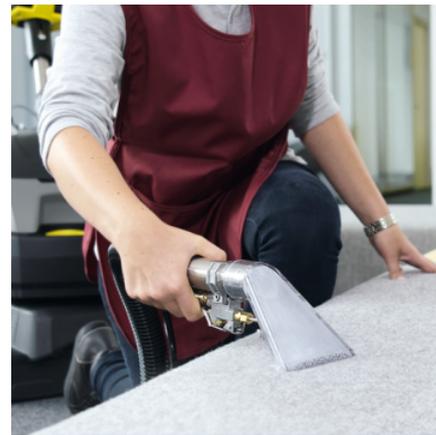

## Optional hand nozzle

- For cleaning corners or for spray extraction of chairs and cushions.

## ACCESSORIES FOR BRC 40/22 C 1.008-062.0



|  |   | Order no.   | Description  |   |
|--|---|-------------|--|---|
| <b>ROLLER BRUSHES</b>                    |   |             |  |   |
| Roller brush, medium-hard, green, 400 mm | 1 | 4.762-000.0 | Medium-hard, light green roller brush for effective cleaning of textile floor coverings. Particularly suitable for velour coverings with a fibre height of up to 3 mm. | ■ |
| Roller brush, soft, blue, 400 mm         | 2 | 4.762-254.0 | Soft blue roller brush for cleaning textile floor coverings. Particularly suitable for loop-pile textiles.   | □ |
| <b>OTHER ACCESSORIES SCRUBBER DRIERS</b> |   |             |  |   |
| <b>Miscellaneous</b>                     |   |             |  |   |
| Filling hose                             | 3 | 6.680-124.0 | 1,500-mm filling hose for easy device filling from a water tap. With universal tapered fitting for all standard taps.  | □ |
| Extension cable                          | 4 | 6.647-022.0 | Extension cable, 20 m, 3x1.5 mm <sup>2</sup> . With splash-proof earthing pin plug, strain relief and anti-kink sleeve.  | □ |
| <b>SPRAY EXTRACTION MACHINES</b>         |   |             |  |   |
| <b>Upholstery tools</b>                  |   |             |  |   |
| Hand nozzle                              | 5 | 4.130-163.0 | For cleaning upholstery with Puzzi 400/E and Puzzi 400 K, with water flow reducer 3.637-029.0 - except Puzzi 400 K.  | □ |
| <b>Spray/suction hoses</b>               |   |             |  |   |
| Spray/suction hose, 4.0 m, Puzzi 400     | 6 | 4.440-644.0 | Spray/suction hose with a length of 4 m and a metal coupling. Suitable for the Puzzi 400 spray extraction cleaner from Kärcher.  | □ |
| <b>CARPET CLEANERS</b>                   |   |             |  |   |
| <b>Other accessories</b>                 |   |             |  |   |
| Adapter                                  | 7 | 8.631-030.0 | For floor tool 4.130-061.0 and handle with trigger 4.130-163.0.  | □ |

■ Included in the scope of supply. □ Available accessories.

## BD 50/60 C CLASSIC EP

The ideal entry-level model: BD 50/60 C Ep Classic walk-behind, mains-operated scrubber drier with disc technology and 60 litre tank for an area performance of up to 2,000 m<sup>2</sup>/h.



### Order no.

1.127-002.0

- Mains operation
- One disc
- Extremely easy to use

### Technical data

|                                     |                        |                           |
|-------------------------------------|------------------------|---------------------------|
| <b>EAN code</b>                     |                        | 4054278006697             |
| <b>Drive type</b>                   |                        | Mains operation           |
| <b>Traction drive</b>               |                        | Advance by brush rotation |
| <b>Working width of brushes</b>     | mm                     | 510                       |
| <b>Working width, vacuuming</b>     | mm                     | 900                       |
| <b>Tank of fresh/dirty water</b>    | l                      | 60 / 60                   |
| <b>Theoretical area performance</b> | m <sup>2</sup> /h      | 2040                      |
| <b>Practical area performance</b>   | m <sup>2</sup> /h      | 1020                      |
| <b>Brush rotational speed</b>       | rpm                    | 180                       |
| <b>Brush contact pressure</b>       | g/cm <sup>2</sup> / kg | 27.3 - 28.5 / 20 - 23     |
| <b>Water consumption</b>            | l/min                  | max. 2.3                  |
| <b>Sound pressure level</b>         | dB(A)                  | 67                        |
| <b>Supply voltage</b>               | V / Hz                 | 230 / 50                  |
| <b>Weight without accessories</b>   | kg                     | 52                        |
| <b>Dimensions (L × W × H)</b>       | mm                     | 1170 × 570 × 1025         |
| <b>Colour</b>                       |                        | anthracite                |

### Equipment

|                          |   |
|--------------------------|---|
| <b>Disc brush</b>        | ■ |
| <b>2-tank system</b>     | ■ |
| <b>Mains operation</b>   | ■ |
| <b>Transport wheels</b>  | ■ |
| <b>Squeegee, v-shape</b> | ■ |

■ Included in the scope of supply.

Users must receive training on this device.



### Affordable entry-level model

- Excellent price-performance ratio.
- Reduced to the most important functions.



### Large tank volume with compact dimensions

- Extremely manoeuvrable.
- Offers a clear view of the cleaning surface.



### Large working width

- Integrated disc brush head with 51-centimetre/20 inch brush.
- For efficient cleaning of medium-sized areas.

## ACCESSORIES FOR BD 50/60 C CLASSIC EP

### 1.127-002.0



|   | Order no.      | Description  |   |
|---|----------------|--|---|
| <b>DISC BRUSHES</b>   |                |  |   |
| Disc brush, medium, red, 510 mm                                 | 1 4.905-026.0  | Red standard disc brush for regular maintenance cleaning.  | ■ |
| Disc brush, soft, natural, 510 mm                               | 2 4.905-027.0  | Natural-coloured, soft disc brush for cleaning and polishing textured floor coverings.   | □ |
| Disc brush complete black D51, hard, Black, 510 mm              | 3 4.905-029.0  | Black, very abrasive disc brush for the deep cleaning of hard-wearing floor coverings with very sticky dirt.   | □ |
| <b>SQUEEGEES AND SQUEEGEE BLADES</b>                            |                |  |   |
| <b>Squeegees</b>  |                |  |   |
| Squeegee, 900 mm, V-shaped                                      | 4 4.777-079.0  | 900 mm long, V-shaped squeegee with suction lips made from wear- and oil-resistant polyurethane with a long lifetime and for all floors. With spirit level for precise adjustment.       | ■ |
| Squeegee, 850 mm, straight                                      | 5 4.777-401.0  | Straight, with support rollers. Squeegee blades of oil-resistant, transparent polyurethane.  | □ |
| <b>Squeegee blades</b>  |                |  |   |
| Squeegee blades for V-squeegee, oil-resistant, grooved, 1010 mm | 6 6.273-023.0  | Suction lip set, fluted and developed for V-shaped squeegees with length of 900 mm. The suction lips are made of wear- and oil-resistant polyurethane and are suitable for all floors.   | ■ |
| Rubber lip set, oil-resistant, grooved, 890 mm                  | 7 6.273-207.0  | Squeegee blade kit includes front and rear squeegee blades, 890 mm. Grooved squeegee blades of hard-wearing, oil-resistant, transparent polyurethane. For all standard floors.           | □ |
| Squeegee blades, oil-resistant, slotted, 890 mm                 | 8 6.273-229.0  | Squeegee blade kit includes front and rear squeegee blades, 890 mm. Slotted squeegee blades of hard-wearing, oil-resistant, transparent polyurethane. For sensitive floors.              | □ |
| Squeegee blades, oil-resistant, closed, 890 mm                  | 9 6.273-290.0  | Suction lip set, consisting of front and rear suction lip. 890 mm long. In an enclosed design made from wear-resistant, oil-resistant and transparent polyurethane. For textured floors. | □ |
| Squeegee blades, Natural rubber, 890 mm                         | 10 6.273-213.0 | Squeegee blade kit includes front and rear squeegee blades, 890 mm. Soft natural rubber grooved squeegee blades. For all standard floors.  | □ |
| <b>DISC PADS / PAD DRIVE BOARDS</b>                             |                |  |   |
| <b>Pads</b>   |                |  |   |
| Pad, soft, beige, 508 mm, 5 x                                   | 11 6.369-468.0 | Beige-coloured pad for ultra high-speed polishing and cleaning.  | □ |
| Pad, medium-soft, red, 508 mm, 5 x                              | 12 6.369-079.0 | Red, standard disc pad for regular maintenance cleaning.   | □ |
| Pad, medium-hard, green, 508 mm, 5 x                            | 13 6.369-078.0 | Green, abrasive roller pad for deep cleaning, as well as the removal of sticky dirt.   | □ |
| Pad, hard, Black, 508 mm, 5 x                                   | 14 6.369-077.0 | Black, very abrasive disc pad for the deep cleaning of hard-wearing floor coverings with very sticky dirt.   | □ |

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR BD 50/60 C CLASSIC EP

### 1.127-002.0



|  |    | Order no.   | Description  |                          |
|--|----|-------------|--|--------------------------|
| <b>DISC PADS / PAD DRIVE BOARDS</b>          |    |             |  |                          |
| <b>Pads</b>                                  |    |             |  |                          |
| Pad, hard, brown, 508 mm, 2 x                | 15 | 2.639-258.0 | Very abrasive disc pad for chemical-free care film and decoating.  | <input type="checkbox"/> |
| Natural hair pad, soft, natural, 500 mm, 5 x | 16 | 6.371-146.0 | The soft beige disc pad made from natural hair is ideal for cleaning and high-gloss polishing.   | <input type="checkbox"/> |
| <b>Pad drive boards</b>                      |    |             |  |                          |
| Pad drive board STRONG, 480 mm               | 17 | 4.762-593.0 | Required for use of melamine pads, but can also be used for normal pads. Pad drive board with lots of extra hooks for holding pads. Extra-strong hold of the pad at the pad drive board of the cleaning head D 51. | <input type="checkbox"/> |
| Pad drive board, 479 mm                      | 18 | 4.762-534.0 | For cleaning with pads. With quick-change coupling and Centerlock.   | <input type="checkbox"/> |
| <b>Diamond pad</b>                           |    |             |  |                          |
| Diamond pad, coarse, White, 508 mm, 5 x      | 19 | 6.371-260.0 | White, coarse diamond disc pad for hard floor coverings. Removes minor scratches and creates a clean, even matt base for further treatment with yellow diamond disc pad.   | <input type="checkbox"/> |
| Diamond pad, medium, Yellow, 508 mm, 5 x     | 20 | 6.371-261.0 | Yellow, diamond disc pad for treating and maintaining hard floor coverings. For a silky matt surface which can then be polished with the green diamond disc pad.   | <input type="checkbox"/> |
| Diamond pad, fine, green, 508 mm, 5 x        | 21 | 6.371-240.0 | Green, fine diamond disc pad for polishing polishable floor coverings. Creates high-gloss surfaces and can also be used for crystallisation.   | <input type="checkbox"/> |
| <b>Melamine pads</b>                         |    |             |  |                          |
| Melamine pad, Grey/white, 508 mm, 2 x        | 22 | 6.371-025.0 | White melamine disc pad for intermediate and deep cleaning of microporous surfaces, as well as fine stone and other hard floor coverings. Can also be used for removing grey haze.                                 | <input type="checkbox"/> |
| <b>OTHER ACCESSORIES SCRUBBER DRIERS</b>     |    |             |  |                          |
| <b>Miscellaneous</b>                         |    |             |  |                          |
| Extension cable                              | 23 | 6.647-022.0 | Extension cable, 20 m, 3x1.5 mm <sup>2</sup> . With splash-proof earthing pin plug, strain relief and anti-kink sleeve.  | <input type="checkbox"/> |
| Filling hose                                 | 24 | 6.680-124.0 | 1,500-mm filling hose for easy device filling from a water tap. With universal tapered fitting for all standard taps.  | <input type="checkbox"/> |
| <b>Home Base accessories</b>                 |    |             |  |                          |
| Universal hook kit                           | 25 | 4.070-075.0 | Hook and adaptor kit for attachment to the Home Base rail scrubber drier by Kärcher. Ideal for space-saving storage of hoses (for example, spray suction attachment kit) on the machine.                           | <input type="checkbox"/> |
| Holder handhold grey                         | 26 | 6.980-078.0 | Mop clip for attaching a mop to the machine. Only for use with the Homebase adapter 5.035-488.0.   | <input type="checkbox"/> |
| Bottle holder                                | 27 | 6.980-080.0 | Suitable for transporting spray bottles - only in conjunction with Home Base adapter 5.035-488.0.  | <input type="checkbox"/> |
| Home Base Box Kit                            | 28 | 4.035-406.0 | The Box kit provides enough space for three cleaning agent bottles along with cloths, scrapers, spare rubbish bags, gloves, etc.   | <input type="checkbox"/> |


■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR BD 50/60 C CLASSIC EP

### 1.127-002.0



29



30



31



32



33



34



35



36

|   |    | Order no.   | Description  |                          |
|---|----|-------------|--|--------------------------|
| <b>OTHER ACCESSORIES SCRUBBER DRIERS</b>      |    |             |  |                          |
| <b>Home Base accessories</b>                  |    |             |  |                          |
| Home Base adapter                             | 29 | 5.035-488.0 | Fastener for various hooks and clips on the machine.   | <input type="checkbox"/> |
| Double hook                                   | 30 | 6.980-077.0 | Double hook for attaching rubbish bags, etc. to the machine. Only for use with the Homebase adapter 5.035-488.0.   | <input type="checkbox"/> |
| <b>Dosing aids</b>                            |    |             |  |                          |
| DS 3 Cleaning Agent Dosing Station            | 31 | 2.641-811.0 | After connecting to a tap, cleaning agent can be filled into the fresh water tank and diluted as required. Can also be used with the filling system attachment kit. Includes backflow preventer (DIN EN 1717). | <input type="checkbox"/> |
| <b>KITS</b>                                   |    |             |  |                          |
| <b>Other attachment kits</b>                  |    |             |  |                          |
| ABS drain hose ball valve                     | 32 | 2.643-986.0 | Drain hose for metered draining of dirty water from the tanks in our BD 50/50 C Classic and BD 50/60 C Classic scrubber driers. Water flow regulation using a ball valve.                                      | <input type="checkbox"/> |
| Attachment kit stacked bumper roller squeegee | 33 | 4.035-619.0 | Additional, non-marking bumper rollers for assembly at the ends of the squeegee. Effectively prevent the squeegee from hooking onto pallets or shelf feet.   | <input type="checkbox"/> |
| Suction hose accessories                      | 34 | 4.444-015.0 | For vacuuming water out of corners or containers (e.g. freezers).  | <input type="checkbox"/> |
| <b>SPRAY EXTRACTION MACHINES</b>              |    |             |  |                          |
| <b>Other</b>                                  |    |             |  |                          |
| Cleaning agent container, complete            | 35 | 4.070-006.0 | Kit consisting of cleaning agent container and Home Base adapter. For connecting Home Base rail.   | <input type="checkbox"/> |
| <b>SPRAY UNITS</b>                            |    |             |  |                          |
| Pump spray bottle                             | 36 | 6.394-409.0 | 1-litre pump spray bottle - including pump and pressure tank - easy, uniform spraying for cleaning or crystallising.   | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories.

## K 7 PREMIUM SMART CONTROL

K 7 Premium Smart Control: Pressure washer with Bluetooth, application consultant app, boost mode for extra power, G 180 Q Smart Control spray gun, 3-in-1 Multi Jet spray lance, hose reel.



**Order no.** 1.317-230.0

- Smart Control spray gun with +/- buttons and LCD display for pressure control and detergent dosing
- Maximum stability thanks to low centre of gravity, hose guide and larger base
- Highly efficient water-cooled motor

| Technical data             |                   |                             |
|----------------------------|-------------------|-----------------------------|
| EAN code                   |                   | 4054278605135               |
| Supply voltage             | V / Hz            | 230 / 50                    |
| Pressure                   | bar / MPa         | 20 - max. 180 / 2 - max. 18 |
| Flow rate                  | l/h               | max. 600                    |
| Area performance           | m <sup>2</sup> /h | 60                          |
| Inlet temperature          | °C                | max. 60                     |
| Connected load             | kW                | 3                           |
| Power cable                | m                 | 5                           |
| Colour                     |                   | Yellow                      |
| Weight without accessories | kg                | 17.9                        |
| Weight incl. packaging     | kg                | 22.3                        |
| Dimensions (L × W × H)     | mm                | 459 × 330 × 666             |

| Equipment                               |   |                       |
|---|---|-----------------------|
| High-pressure gun                       |   | G 180 Q Smart Control |
| 3-in-1 Multi Jet                        |   | ■                     |
| Integrated high-pressure hose reel      |   | ■                     |
| High-pressure hose                      | m | 10                    |
| Device-side Quick Connect               |   | ■                     |
| Detergent application via               |   | Plug 'n' Clean system |
| Telescopic handle                       |   | ■                     |
| Water-cooled motor                      |   | ■                     |
| Integrated water filter                 |   | ■                     |
| Adapter for A3/4" garden hose connector |   | ■                     |
| App connection via Bluetooth            |   | ■                     |

■ Included in the scope of supply.



### Connects to the Home & Garden app via Bluetooth

- The Kärcher Home & Garden app makes you a cleaning expert.
- Make use of our extensive Kärcher knowledge for the perfect cleaning results.
- The app transmits the optimal pressure to the pressure washer via Bluetooth.



### Boost mode for additional power in your fight against dirt

- With extra power, boost mode increases the cleaning efficiency and saves time.
- Allows powerful spot-cleaning of stubborn dirt.



### Smart Control spray gun and 3-in-1 Multi Jet spray lance

- Spray gun with LCD display and buttons for pressure or detergent dosing.
- The rotating 3-in-1 Multi Jet contains three different nozzles for easy replacement.
- Quick Connect for easily connecting high-pressure hose and accessories.

## ACCESSORIES FOR K 7 PREMIUM SMART CONTROL

### 1.317-230.0



|  |    | Order no.   | Description   |   |
|--|----|-------------|---|---|
| <b>SPRAY LANCES</b>  |    |             |   |   |
| MJ 180 3-in-1 multijet for K 7 (Premium) FC Plus & Smart Control | 1  | 2.643-907.0 | The Kärcher 3-in-1 Multi Jet spray lance is suitable for the K 7 Smart Control, K 7 Full Control Plus and K 7 Premium Full Control Plus (from 2017) pressure washers.   | ■ |
| Telescopic spray lance   | 2  | 2.642-347.0 | Telescopic spray lance (1.20 m – 4 m) for easy cleaning of difficult to reach areas. With shoulder strap, bayonet connection and integrated, ergonomically adjustable trigger gun. Weight: ca. 2 kg   | □ |
| TLA 4 telescopic spray lance                                     | 3  | 2.644-190.0 | Simple cleaning at (almost) every point: The telescopic spray lance easily reaches areas that are difficult to access thanks to its 180° adjustable hinge.  | □ |
| Façade & glass cleaning kit                                      | 4  | 2.644-249.0 | Set comprising the telescopic spray lance TLA 4 and the façade and glass cleaning attachment. For easy cleaning of objects that are difficult to access such as house façades or conservatories.  | □ |
| Splash guard   | 5  | 2.642-706.0 | Transparent splash guard for class K 2 to K 7 Kärcher pressure washers protects the operator and surrounding area from spray water. Ideal for cleaning corners and edges.   | □ |
| Angled spray lance   | 6  | 2.638-817.0 | Extra-long angled spray lance (about 1 m) for easy cleaning of difficult to reach areas, e.g. roof gutters or vehicle underbodies.  | □ |
| 1-step lance extension   | 7  | 2.643-240.0 | Extends spray lance by 0.4 m. For effective cleaning of difficult to reach areas. Suitable for all Kärcher accessories.   | □ |
| ecoBooster 180   | 8  | 2.645-386.0 | Ideal for delicate surfaces, very efficient – the ecoBooster delivers a 50% higher cleaning performance than the flat jet, saving water, energy and time.   | □ |
| VP 180 S vario power jet short 360° for K 2-K 7                  | 9  | 2.643-254.0 | VP 180 S: The vario power jet short 360° with infinitely variable pressure regulation and adjustable 360° joint is ideal for cleaning areas that are difficult to reach.  | □ |
| <b>TRIGGER GUNS</b>  |    |             |   |   |
| G 180 Q Smart Control gun  | 10 | 2.644-270.0 | G 180 Q Smart Control high-pressure gun for all Kärcher pressure washers in the Smart Control range: with LCD display and control keys for pressure and detergent.  | ■ |
| <b>SURFACE CLEANERS</b>  |    |             |   |   |
| T 7 Plus T-Racer surface cleaner                                 | 11 | 2.644-074.0 | Power nozzle for ultimate cleaning power, even in corners and along edges: The T 7 Plus T-Racer surface cleaner with rinse function – for effective and splash-free cleaning of large areas.  | □ |
| T 5 T-Racer surface cleaner                                      | 12 | 2.644-084.0 | Thorough and splash-free cleaning over large areas: The T 5 T-Racer surface cleaner. The adjustable nozzle position means the surface cleaner can be used to clean hard and delicate surfaces alike.  | □ |
| PS 30 power scrubber surface cleaner                             | 13 | 2.644-123.0 | The PS 30 power scrubber, with its three integrated high-pressure nozzles, powerfully removes stubborn dirt from various surfaces, while saving time. Ideal for stairs and edges. Includes integrated squeegee blade to remove the dirty water. | □ |
| PS 30 Plus power scrubber surface cleaner                        | 14 | 2.644-212.0 | The PS 30 Plus power scrubber removes stubborn dirt with its three high-pressure nozzles. Thanks to the swivelling side nozzle, all corners and edges are effortlessly cleaned.   | □ |

■ Included in the scope of supply. □ Available accessories. ○ Detergents.

## ACCESSORIES FOR K 7 PREMIUM SMART CONTROL

### 1.317-230.0



|   |    | Order no.   | Description  |                          |
|---|----|-------------|--|--------------------------|
| <b>BRUSHES</b>                          |    |             |  |                          |
| WB 7 Plus 3-in-1 wash brush             | 15 | 2.644-374.0 | Particularly versatile thanks to its clever combination: The WB 7 Plus 3-in-1 wash brush combines a foam jet, high-pressure flat spray nozzle and a soft brush in a single product.                | <input type="checkbox"/> |
| WB 150 power brush                      | 16 | 2.643-237.0 | WB 150 power brush for splash-free cleaning of sensitive surfaces. The effective combination of high pressure and manual brush pressure saves energy, water and up to 30% time.                    | <input type="checkbox"/> |
| WB 120 rotating wash brush              | 17 | 2.644-060.0 | Rotating wash brush with interchangeable attachment for cleaning all smooth surfaces such as paint, glass or plastic. Quick and easy attachment changing thanks to the integrated release lever.   | <input type="checkbox"/> |
| WB 130 rotating wash brush              | 18 | 2.644-286.0 | Always in motion: The rotating wash brush with interchangeable attachment cleans smooth surfaces such as paint, glass or plastic. Quick attachment changes thanks to the integrated release lever. | <input type="checkbox"/> |
| Rotating wash brush                     | 19 | 2.644-061.0 | Ideal for cleaning smooth surfaces such as paint, glass or plastic: The rotating wash brush with interchangeable attachment.   | <input type="checkbox"/> |
|   | 20 | 2.644-288.0 | Effective cleaning of smooth surfaces such as paint, glass or plastic: The rotating wash brush with interchangeable attachment.  | <input type="checkbox"/> |
| WB 120 rotating wash brush car & bike   | 21 | 2.644-129.0 | Gently cleans cars and motorbikes: The rotating wash brush with innovative soft microfibre interchangeable attachment Car & Bike. Machine washable at 60 °C.                                       | <input type="checkbox"/> |
| WB 130 rotating wash brush car & bike   | 22 | 2.644-287.0 | Gentle cleaning of cars and motorbikes: The rotating wash brush with innovative removable microfibre Car & Bike attachment. Machine washable at 60 °C.   | <input type="checkbox"/> |
| WB 60 soft surface wash brush           | 23 | 2.643-233.0 | Soft flat brush for cleaning larger areas such as car, caravan, boat, conservatory or roller shutters. Good area performance with working width of 248 mm.   | <input type="checkbox"/> |
| Wheel washing brush                     | 24 | 2.643-234.0 | Wheel washing brush for effective cleaning also in difficult to reach areas. Uniform 360° water distribution for a perfect cleaning result.  | <input type="checkbox"/> |
| Wash brush                              | 25 | 6.903-276.0 | Wash brush with soft bristles for cleaning sensitive areas and areas which are difficult to access in the outside area. Suitable for all Kärcher K 2 to K 7 pressure washers.                      | <input type="checkbox"/> |
|   | 26 | 2.642-783.0 | Universal brush with ergonomic handle and soft bristles for thorough and gentle cleaning of all surfaces.  | <input type="checkbox"/> |
| <b>PIPE CLEANING</b>                    |    |             |  |                          |
| PC 20 roof gutter and pipe cleaning kit | 27 | 2.642-240.0 | The gutter and pipe cleaning kit works all by itself - with high pressure. It easily cleans outflows, pipe blockages and gutters. Hose length: 20m.  | <input type="checkbox"/> |
| PC 15 pipe cleaning kit                 | 28 | 2.637-767.0 | Pipe cleaning kit with 15 m hose for clearing blockages in pipes, drains and downpipes.  | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories. ○ Detergents.

## ACCESSORIES FOR K 7 PREMIUM SMART CONTROL 1.317-230.0



|  | Order no. | Description |  |
|--|-----------|-------------|--|
| <b>PIPE CLEANING</b>                                       |           |             |  |
| PC 7.5 pipe cleaning kit                                   | 29        | 2.637-729.0 | Pipe cleaning kit with 7.5 m hose for clearing blockages in pipes, drains and downpipes. <input type="checkbox"/>  |
| <b>FOAM JET</b>  |           |             |  |
| FJ 6 foam jet  | 30        | 2.643-147.0 | FJ 6 foam nozzle for cleaning with powerful foam (e.g. ultra foam cleaner). For cars, motorcycles etc. and for applying cleaning products to stone and wood surfaces and façades. <input type="checkbox"/> |
| FJ 3 foam jet  | 31        | 2.643-150.0 | FJ 3 foam nozzle for cleaning with powerful foam (e.g. ultra foam cleaner). For cars, motorcycles etc. and for applying cleaning products to stone and wood surfaces and façades. <input type="checkbox"/> |
| FJ 0   | 32        | 2.645-383.0 | <input type="checkbox"/>   |
| FJ 10 C Connect 'n' Clean foam jet + Ultra Foam Cleaner    | 33        | 2.643-143.0 | Ultra foam cleaner + quick-change system FJ 10 C Connect 'n' Clean foam nozzle. Easy change between different detergents with just a simple click. <input type="checkbox"/>                                |
| FJ 10 C foam jet Connect 'n' Clean with car shampoo 3-in-1 | 34        | 2.643-144.0 | Car shampoo + quick-change system FJ 10 C Connect 'n' Clean foam nozzle. Easy change between different detergents with just a simple click. <input type="checkbox"/>                                       |
| <b>MISCELLANEOUS</b>                                       |           |             |  |
| SH 5 suction hose  | 35        | 2.643-100.0 | Environmentally friendly 5-metre long suction hose for sucking up water from alternative sources such as water butts or water containers. <input type="checkbox"/>   |
| SH 3 suction hose  | 36        | 2.643-101.0 | 3 metre suction hose for drawing water from alternative sources such as water butts and barrels. <input type="checkbox"/>  |
| Sand and wet-blasting kit                                  | 37        | 2.638-792.0 | Sand and wet-blasting kit for removing rust, paint and stubborn dirt using Kärcher abrasive. <input type="checkbox"/>  |
| Vario joint  | 38        | 2.640-733.0 | Vario joint, rotates 180° for cleaning difficult to reach areas. For connection between gun and accessory or extension lance and accessory. <input type="checkbox"/>                                       |
| Water filter   | 39        | 4.730-059.0 | Water filter protects pressure washer pumps against dirt particles from dirty water. <input type="checkbox"/>  |
|  | 40        | 2.642-794.0 | Water filter to protect the high-pressure pump against dirt particles from contaminated water. <input type="checkbox"/>  |
| Anti-twist adapter   | 41        | 2.644-257.0 | The anti-twist adapter eliminates loops in the high-pressure hose for guaranteed twist-free working. For all high-pressure hoses with a Quick Connect adapter on the gun. <input type="checkbox"/>         |
| O-ring set   | 42        | 2.640-729.0 | Replacement O-ring set for easy replacement of O-rings and safety plugs on pressure washer accessories. <input type="checkbox"/>   |

Available accessories.  Detergents.

## ACCESSORIES FOR K 7 PREMIUM SMART CONTROL

### 1.317-230.0




|   |    | Order no.   | Description  |                          |
|---|----|-------------|--|--------------------------|
| <b>HIGH-PRESSURE HOSES</b>  |    |             |  |                          |
| <b>High-pressure replacement hose: system starting 2009 with Quick Connect system</b> |    |             |  |                          |
| H 10 Q High-Pressure Hose with Quick Connect and for hose reel devices                | 43 | 2.643-633.0 | Replacement hose with Quick Connect adapters for quick attachment. For all Kärcher devices in classes K 4-K 7 with hose reel (from 2009 year of manufacture or later). The high-pressure hose is 10 metres long and suitable for temperatures up to 60°C and a pressure up to 180 bar. | <input type="checkbox"/> |
| <b>High-pressure extension hose: System for devices with Quick Connect system</b>     |    |             |  |                          |
| XH 10 Q extension hose Quick Connect  | 44 | 2.641-710.0 | High-pressure hose extension for greater flexibility. 10-m, robust DN 8 quality hose for excellent durability. For K 3-K 7 devices with Quick Connect adapter.   | <input type="checkbox"/> |
| XH 6 Q extension hose Quick Connect   | 45 | 2.641-709.0 | High-pressure extension hose for greater flexibility. 6 m robust DN 8 quality hose for durability. For K 2 to K 7 series from 2008 with Quick Connect adapter. Connect between spray gun and high-pressure hose.   | <input type="checkbox"/> |
| <b>HOSES</b>  |    |             |  |                          |
| PrimoFlex® hose 1/2" - 30 m   | 46 | 2.645-248.0 | Ultra-durable and kink-resistant PrimoFlex® quality garden hose (1/2"). 30 m long. With pressure-resistant woven reinforcement. Contains no substances that are harmful to health. Bursting pressure: 24 bar. High temperature resistance from 0 to +40 °C.                            | <input type="checkbox"/> |
| PrimoFlex® hose 1/2" - 15 m   | 47 | 2.645-296.0 | The PrimoFlex® (1/2") flexible garden hose is 15 m long, temperature-resistant, comes with pressure-resistant reinforcement technology and contains no substances that are harmful to human health. Bursting pressure: 22 bar.   | <input type="checkbox"/> |
| PrimoFlex® 1/2" - 25 m  | 48 | 2.645-297.0 | The PrimoFlex® (1/2") flexible garden hose is 25 m long, temperature-resistant, comes with pressure-resistant reinforcement technology and contains no substances that are harmful to human health. Bursting pressure: 24 bar.   | <input type="checkbox"/> |
| PrimoFlex® hose 5/8" - 15 m   | 49 | 2.645-298.0 | 15 m long, temperature-resistant and contains no substances that are harmful to human health: The flexible PrimoFlex® garden hose (5/8") with pressure-resistant reinforcement mesh and a bursting pressure of 22 bar.   | <input type="checkbox"/> |
| Hose Performance Plus 1/2" -20m   | 50 | 2.645-318.0 | Flexible and extremely resistant to kinks thanks to high-quality multi-layered woven material: the new 20-metre long Performance Plus 1/2" garden hose. Ensures constant water flow.   | <input type="checkbox"/> |
| Hose Performance Plus 1/2" -50m   | 51 | 2.645-319.0 | Flexible, ultra-robust and extremely resistant to kinks thanks to high-quality multi-layered woven material: the new 50-metre long Performance Plus 1/2" garden hose for constant water flow.  | <input type="checkbox"/> |
| Hose Performance Plus 5/8" -25m   | 52 | 2.645-320.0 | Quality garden hose from Kärcher: the new 25-metre long Performance Plus 5/8" garden hose. Flexible and extremely resistant to kinks - for constant water flow. Bursting pressure 40 bar.  | <input type="checkbox"/> |
| Hose Performance Plus 5/8" -50m   | 53 | 2.645-321.0 | The 50-metre long Performance Plus 5/8" garden hose, made from ultra-robust multi-layered woven material. Flexible and extremely resistant to kinks for constant water flow.   | <input type="checkbox"/> |
| Hose Performance Plus 3/4" -25m   | 54 | 2.645-322.0 | Easy-to-handle, long-lasting and weather-resistant: the 25-metre long Performance Plus 3/4" garden hose. Flexible, ultra-robust and extremely resistant to kinks - for constant water flow.  | <input type="checkbox"/> |
| Hose Performance Plus 3/4" -50m   | 55 | 2.645-323.0 | Ultra-robust, extremely resistant to kinks and free from potentially harmful substances: the 50-metre long Performance Plus 3/4" garden hose. Made from high-quality multi-layered woven material - for constant water flow.   | <input type="checkbox"/> |
| Performance Premium hose, 1/2" -20 m  | 56 | 2.645-324.0 | The hose innovation from Kärcher: the ultra-flexible and kink-resistant Performance Premium garden hose. Diameter: 1/2". Length: 20 m. With Kärcher Premium anti-torsion technology.   | <input type="checkbox"/> |

Available accessories.  Detergents.

## ACCESSORIES FOR K 7 PREMIUM SMART CONTROL

### 1.317-230.0

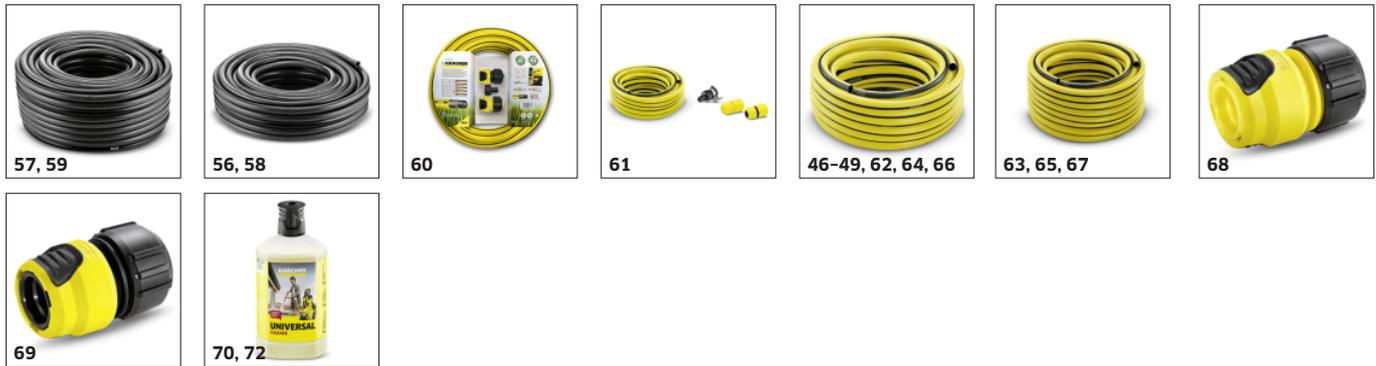

|   |    | Order no.   | Description  |                          |
|---|----|-------------|--|--------------------------|
| <b>HOSES</b>                                |    |             |  |                          |
| Hose Performance Premium 1/2"-50m           | 57 | 2.645-325.0 | The hose innovation from Kärcher: the ultra-flexible and kink-resistant Performance Premium garden hose. Diameter: 1/2". Length: 50 m. With Kärcher Premium anti-torsion technology.   | <input type="checkbox"/> |
| Hose Performance Premium 5/8"-25m           | 58 | 2.645-326.0 | The hose innovation from Kärcher: the ultra-flexible and kink-resistant Performance Premium garden hose. Diameter: 5/8". Length: 25 m. With Kärcher Premium anti-torsion technology.   | <input type="checkbox"/> |
| Hose Performance Premium 5/8" -50m          | 59 | 2.645-327.0 | The hose innovation from Kärcher: the ultra-flexible and kink-resistant Performance Premium garden hose. Diameter: 5/8". Length: 50 m. With Kärcher Premium anti-torsion technology.   | <input type="checkbox"/> |
| Hose set for pressure washers               | 60 | 2.645-156.0 | Hose set for high-pressure cleaning or garden watering. With 10 m PrimoFlex® hose (3/4"), G3/4 tap adaptor, 1 × universal hose connector and universal connector with Aqua Stop.   | <input type="checkbox"/> |
| Water supply hose set                       | 61 | 2.645-258.0 | Hose set for water supply (pressure washer, garden watering). With 10 m PrimoFlex® hose (1/2"), hose connector with and without Aqua Stop, and universal connection for non-threaded taps.   | <input type="checkbox"/> |
| PrimoFlex® hose 1/2" - 20 m                 | 62 | 2.645-138.0 | The PrimoFlex® (1/2") flexible garden hose is 20 m long, temperature-resistant, comes with pressure-resistant reinforcement technology and contains no substances that are harmful to health. Bursting pressure: 24 bar.                               | <input type="checkbox"/> |
| PrimoFlex® hose 1/2" - 50 m                 | 63 | 2.645-139.0 | PrimoFlex® quality garden hose (1/2"). 50 m long. With pressure-resistant woven reinforcement. Contains no substances that are harmful to health. Bursting pressure: 24 bar. High temperature resistance from 0 to +40 °C.                             | <input type="checkbox"/> |
| Primo Flex® hose 5/8" - 25 m                | 64 | 2.645-140.0 | PrimoFlex® quality garden hose (5/8"). 25 m long. With pressure-resistant woven reinforcement. Contains no substances that are harmful to health. Bursting pressure: 24 bar. High temperature resistance from 0 to +40 °C.                             | <input type="checkbox"/> |
| PrimoFlex® hose 5/8" - 50 m                 | 65 | 2.645-141.0 | PrimoFlex® quality garden hose (5/8"). 50 m long. With pressure-resistant woven reinforcement. Contains no substances that are harmful to health. Bursting pressure: 24 bar. High temperature resistance from 0 to +40 °C.                             | <input type="checkbox"/> |
| PrimoFlex® hose 3/4" - 25 m                 | 66 | 2.645-142.0 | PrimoFlex® quality garden hose (3/4"). 25 m long. With pressure-resistant woven reinforcement. Contains no substances that are harmful to health. Bursting pressure: 24 bar. High temperature resistance from 0 to +40 °C.                             | <input type="checkbox"/> |
| PrimoFlex® hose 3/4" - 50 m                 | 67 | 2.645-143.0 | PrimoFlex® quality garden hose (3/4"). 50 m long. With pressure-resistant woven reinforcement. Contains no substances that are harmful to health. Bursting pressure: 24 bar. High temperature resistance from 0 to +40 °C.                             | <input type="checkbox"/> |
| <b>HOSE CONNECTION SYSTEMS</b>              |    |             |  |                          |
| Universal hose coupling Plus                | 68 | 2.645-193.0 | Universal hose coupling plus with soft plastic recessed grips for comfortable handling. Compatible with all click systems.   | <input type="checkbox"/> |
| Universal hose coupling Plus with Aqua Stop | 69 | 2.645-194.0 | Universal hose coupling plus with Aqua Stop and soft plastic recessed grips for comfortable handling. Compatible with all click systems.   | <input type="checkbox"/> |
| <b>UNIVERSAL CLEANERS</b>                   |    |             |  |                          |
| Universal cleaner RM 626                    | 70 | 6.295-753.0 | Powerful universal cleaner for use with Kärcher pressure washers. With new active dirt remover which effortlessly removes oil, grease and stubborn mineral-bearing dirt with just cold water. For use all around the house and garden and on vehicles. | <input type="radio"/>    |

Available accessories.  Detergents.


## ACCESSORIES FOR K 7 PREMIUM SMART CONTROL 1.317-230.0



|   |    | Order no.   | Description  |                          |
|---|----|-------------|--|--------------------------|
| <b>UNIVERSAL CLEANERS</b>                           |    |             |  |                          |
| Universal cleaner RM 626                            | 71 | 6.295-754.0 | Powerful universal cleaner for use with Kärcher pressure washers. With new active dirt remover which effortlessly removes oil, grease and stubborn mineral-bearing dirt with just cold water. For use all around the house and garden and on vehicles.                                       | <input type="checkbox"/> |
|   | 72 | 6.295-755.0 |  | <input type="checkbox"/> |
| <b>VEHICLE MAINTENANCE</b>                          |    |             |  |                          |
| Car shampoo 3-in-1 RM 610 + Interior cleaner RM 651 | 73 | 6.296-169.0 | RM 610 Car Shampoo for a sparkling finish thanks to its gentle cleaning and quick drying properties. Care and protection in a single step. With sample of RM 651 Interior Cleaner.   | <input type="checkbox"/> |
| Insect Remover RM 618                               | 74 | 6.295-761.0 | Gently removes insects from paint surfaces, radiator grilles, external mirrors, panels and plastic.  | <input type="checkbox"/> |
| Insect remover RM 618                               | 75 | 6.295-888.0 |  | <input type="checkbox"/> |
| Car glass cleaner RM 650                            | 76 | 6.296-105.0 | Streak- and glare-free cleaning of car windows and mirrors. Reliably removes insects, fingerprints and dirt from the street. With antistatic effect for low resoiling.   | <input type="checkbox"/> |
| Interior cleaner RM 651                             | 77 | 6.296-106.0 | For refreshingly clean interiors without odours: From the cockpit to the rubber seal, from the display through to the upholstery and artificial leather. With antistatic effect and effective odour neutralisation.  | <input type="checkbox"/> |
| Cockpit care matt finish RM 652                     | 78 | 6.296-107.0 | Deep-cleaning care and protection for all plastics and rubber surfaces. Leaves silk-matt surfaces that look as good as new, are pleasant to touch and are water- and dirt-repellent.   | <input type="checkbox"/> |
| Polish & wax RM 660                                 | 79 | 6.296-108.0 | Intensive cleaning and washing- and weather-resistant preservation in a single step. Fine scratches and streaks are removed, and the original colour brilliance is restored.   | <input type="checkbox"/> |
| Rim cleaner premium RM 667                          | 80 | 6.296-048.0 | With maximum cleaning power and quick-action formula. Helps remove all kinds of dirt picked up by all common rim types while on the road. The intelligent colour change indicates how the cleaning agent is taking effect over time.   | <input type="checkbox"/> |
| Winter screen wash concentrate -60°C RM 670         | 81 | 6.296-109.0 | Cleaning and frost-protection agent for window- and headlight-cleaning systems. Prevents the windscreen from freezing and guarantees a streak- and glare-free view.  | <input type="checkbox"/> |
| Summer screen wash 1:100 concentrate RM 672         | 82 | 6.296-110.0 | Highly effective cleaning concentrate for a streak- and glare-free view in summer. Effectively removes insect residues and bird droppings. Yield: 250 ml provides 25 l cleaning agent.   | <input type="checkbox"/> |
| Car shampoo 3-in-1 RM 610                           | 83 | 6.295-750.0 | Powerful car shampoo with unique 3-in-1 formula which offers exceptional cleaning performance thanks to the active dirt remover, as well as a quick-drying and ultra-shine formula. For outstanding cleaning efficiency, care and protection in one step. To gently clean all vehicle types. | <input type="checkbox"/> |
| Ultra foam cleaner RM 615                           | 84 | 6.295-743.0 | With extra foam booster for an even deeper clean. Thanks to the new active dirt remover, it effortlessly and quickly removes even oil and greasy dirt, as well as typical vehicle dirt and road dirt. Phosphate-free and gentle on materials.  | <input type="checkbox"/> |

Available accessories.  Detergents.

## ACCESSORIES FOR K 7 PREMIUM SMART CONTROL 1.317-230.0

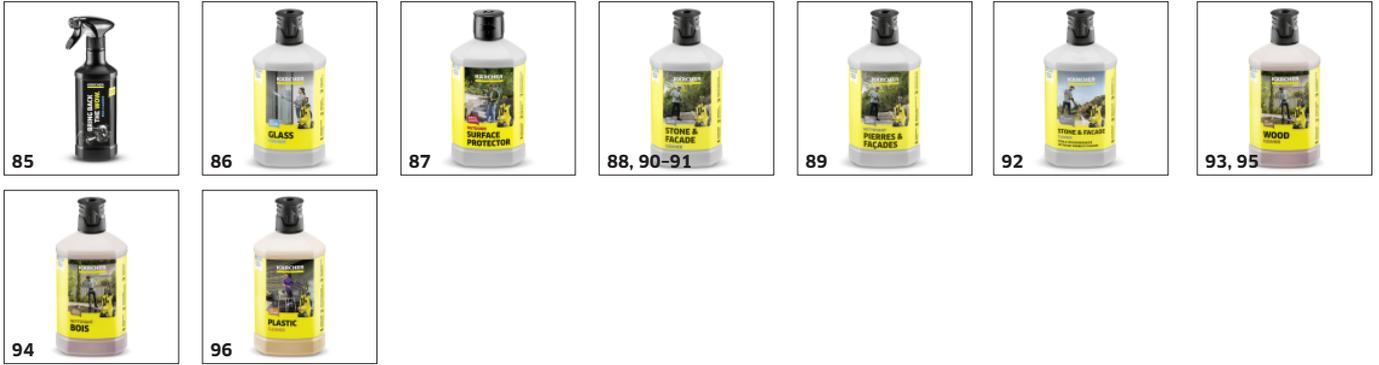

|  | Order no.      | Description   |                       |
|--|----------------|---|-----------------------|
| <b>VEHICLE MAINTENANCE</b>               |                |   |                       |
| Bike cleaner RM 44 G                     | 85 6.295-763.0 | To manually clean motorbikes. Gently and effectively removes typical dirt such as brake dust, tyre wear, insects, mud and oil. A dream to use thanks to the sticky gel formula.   | <input type="radio"/> |
| <b>ALL AROUND THE HOUSE</b>              |                |   |                       |
| <b>Glas Finisher EN</b>                  |                |   |                       |
| Glass finisher 3-in-1 RM 627             | 86 6.295-474.0 | Saves time and effort: the 3-in-1 glass finisher ensures lasting cleanliness without spots or streaks and is particularly suitable for large, hard-to-reach windows (such as winter gardens and glass facades). With protective formula to keep surfaces cleaner for longer. Not effective on coated glass surfaces.  | <input type="radio"/> |
| <b>Stone cleaning &amp; care</b>         |                |   |                       |
| Outdoor surface protector RM 542         | 87 6.295-594.0 | The highly effective outdoor surface protector maintains surfaces in outside areas, refreshes the colour, protects against environmental influences and impresses with its high area performance.   | <input type="radio"/> |
| Stone and Façade Cleaner 3-in-1 RM 611   | 88 6.295-765.0 | Powerful Stone and Paving Cleaner with unique 3-in-1 formula for outstanding cleaning performance. With active dirt remover, protection formula against resoiling, and wind and weather protection. For outstanding cleaning efficiency, care and protection in one step. Can be used on stone terraces, walls and façades all around the house and garden. | <input type="radio"/> |
| Stone and paving cleaner 3-in-1 RM 611   | 89 6.295-766.0 |   | <input type="radio"/> |
|  | 90 6.295-767.0 |   | <input type="radio"/> |
| Stone and cladding cleaner 3-in-1 RM 611 | 91 6.295-885.0 |   | <input type="radio"/> |
| RM 611                                   | 92 6.296-227.0 |   | <input type="radio"/> |
| <b>Wood cleaning &amp; care</b>          |                |   |                       |
| Wood cleaner 3-in-1 RM 612               | 93 6.295-757.0 | Powerful wood cleaner with unique 3-in-1 formula which offers exceptional cleaning performance thanks to the active dirt remover, as well as a UV protection formula and intensive care. For outstanding cleaning efficiency, care and protection in one step. Can be used on all treated and untreated wooden outdoor surfaces.                            | <input type="radio"/> |
|  | 94 6.295-882.0 |   | <input type="radio"/> |
|  | 95 6.295-883.0 |   | <input type="radio"/> |
| <b>Plastic cleaning &amp; care</b>       |                |   |                       |
| Plastic cleaner 3-in-1 RM 613            | 96 6.295-758.0 | Powerful plastic cleaner with unique 3-in-1 formula which offers exceptional cleaning performance thanks to the active dirt remover, as well as a colour and material protection formula. For outstanding cleaning efficiency, care and protection in one step. Can be used on garden furniture, PVC window frames and other plastic surfaces.              | <input type="radio"/> |

Detergents.

## NT 20/1 ME CLASSIC EDITION

The robust, compact NT 20/1 Me Classic wet and dry vacuum cleaner with 20-litre container reliably removes all kinds of dirt.



### Order no.

1.428-548.0

- Easy Service Concept
- Strong suction power
- Cartridge filter or permanent filter basket

### Technical data

|                                   |                    |                         |
|-----------------------------------|--------------------|-------------------------|
| <b>EAN code</b>                   |                    | 4039784978508           |
| <b>Supply voltage</b>             | <b>Ph / V / Hz</b> | 1 / 220 - 240 / 50 - 60 |
| <b>Air flow</b>                   | <b>l/s</b>         | 59                      |
| <b>Vacuum</b>                     | <b>mbar / kPa</b>  | 227 / 22.7              |
| <b>Container content</b>          | <b>l</b>           | 20                      |
| <b>Container material</b>         |                    | Stainless steel         |
| <b>Rated input power</b>          | <b>W</b>           | max. 1500               |
| <b>Standard nominal width</b>     |                    | ID 35                   |
| <b>Cable length</b>               | <b>m</b>           | 6.5                     |
| <b>Sound pressure level</b>       | <b>dB(A)</b>       | 78                      |
| <b>Colour</b>                     |                    | silver                  |
| <b>Weight without accessories</b> | <b>kg</b>          | 7.4                     |
| <b>Dimensions (L × W × H)</b>     | <b>mm</b>          | 375 × 360 × 520         |

### Equipment

|                                  |                      |                 |
|----------------------------------|----------------------|-----------------|
| <b>Suction hose</b>              | <b>m</b>             | 2.5 / with bend |
| <b>Suction tube</b>              | <b>Piece(s) × mm</b> | 2 × 505 / Steel |
| <b>Filter bag</b>                | <b>Piece(s)</b>      | 1 / Fleece      |
| <b>Wet/dry floor nozzle</b>      | <b>mm</b>            | 360             |
| <b>Crevice nozzle</b>            |                      | ■               |
| <b>Cartridge filter</b>          |                      | PES             |
| <b>Stainless steel container</b> |                      | ■               |

■ Included in the scope of supply.



## Compact, robust and mobile

- Excellent stability, easy manoeuvrability and convenient transport thanks to its slimline form and 4 castors.
- The bumper offers secure all-round protection for the vacuum cleaner and equipment.



## Excellent suction power

- NT Classic devices with a powerful 1,500 W turbine reliably remove a wide range of dirt.
- For excellent cleaning results.




## Service and comfort

- Sensationally fast: the Easy Service Concept allows removal of the turbine in just 44 seconds.
- The rapid turbine change not only saves an enormous amount of time, but also costs.

## ACCESSORIES FOR NT 20/1 ME CLASSIC EDITION

### 1.428-548.0

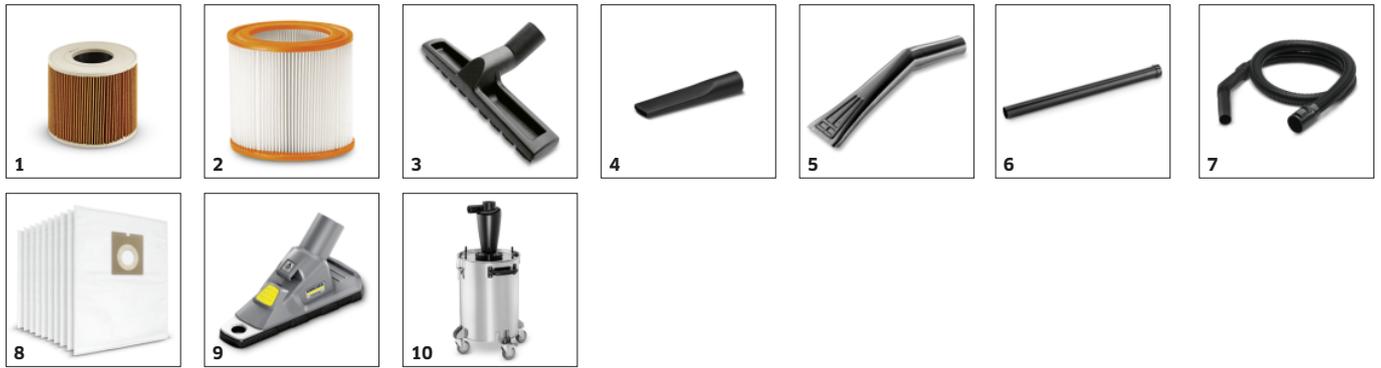

|  |    | Order no.   | Description   |   |
|--|----|-------------|---|---|
| <b>CARTRIDGE FILTER, STANDARD, UP TO BIA C, DUST CLASS M</b>   |    |             |   |   |
| <b>Cartridge filter paper</b>  |    |             |   |   |
| Cartridge filter, paper  | 1  | 6.414-789.0 | Paper cartridge filter with larger filter surface, standard for NT 48/1 and optional for NT 27/1/Me Advanced.   | ■ |
| <b>Cartridge filter PES</b>  |    |             |   |   |
| Cartridge filter PES, suitable for NT Me Classic 20/1, 30/1, 38/1  | 2  | 2.885-891.0 | Moisture-resistant PES cartridge filter for wet and dry vacuum cleaning.  | ■ |
| <b>SUCTION NOZZLES</b>   |    |             |   |   |
| <b>Floor nozzles</b>   |    |             |   |   |
| Floor tool replacement Edition   | 3  | 9.755-549.0 | Edition floor nozzle in DN 35 for wet and dry vacuum cleaner from Kärcher. Made from plastic and includes rollers, brush strips and squeegees. Working width: 300 mm.                             | ■ |
| <b>Crevice nozzles</b>   |    |             |   |   |
| Crevice nozzle, DN 35, plastic, 340 mm   | 4  | 9.770-638.0 | Plastic crevice nozzle for effortless and thorough vacuuming of areas that are very difficult to access such as crevices, gaps or corners. 340 mm long, nominal diameter DN 35.                   | ■ |
| <b>Car cleaning nozzles</b>  |    |             |   |   |
| Car nozzle, ID 35, 90 mm   | 5  | 6.906-108.0 | Flat angled, convenient, plastic, DN 35 car cleaning nozzle designed for all Kärcher wet and dry vacuum cleaners with bends. Working width: Approx. 90 mm.  | □ |
| <b>SUCTION TUBES</b>   |    |             |   |   |
| <b>Suction tubes, metal</b>  |    |             |   |   |
| Suction tube, DN 35, length 505 mm, steel, black, suitable for: T 8/1, T 14/1, NT 20/1, NT 30/1, NT 38/1 | 6  | 2.889-415.0 | Black steel suction tube with a nominal diameter of DN 35 and a length of 505 mm for wet and dry vacuum cleaners from Kärcher.  | ■ |
| <b>SUCTION HOSES</b>   |    |             |   |   |
| <b>Suction hoses with clip system 1.0 (compatible with vacuum cleaners up to model year 2016)</b>        |    |             |   |   |
| Suction hose with bend, NT, DN 35, length 2.5 m, clip 1.0, bayonet 1.0                                   | 7  | 9.755-263.0 | The suction hose with bend in nominal width DN 35 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners.   | ■ |
| <b>FILTER BAGS</b>   |    |             |   |   |
| <b>Fleece filter bags</b>  |    |             |   |   |
| Fleece filter bags, 10 x , NT 20/1, NT 30/1  | 8  | 9.755-360.0 | Tear-resistant 3-layer fleece filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 10-pack.   | □ |
| <b>OTHER ACCESSORIES NT</b>  |    |             |   |   |
| Drilling dust nozzle   | 9  | 2.679-000.0 | Drilling dust nozzle for dust-free vacuuming of boreholes. Suitable for dry and wet and dry vacuum cleaners from Kärcher.   | □ |
| Cyclone preseparator CS 40 Me  | 10 | 2.863-026.0 | The highly efficient CS 40 Me cyclone preseparator for all Kärcher wet and dry vacuum cleaners is a specially designed accessory for fine dust applications on construction sites or in industry. | □ |

■ Included in the scope of supply. □ Available accessories.

## NT 30/1 ME CLASSIC EDITION

The NT 30/1 Me Classic is a practical and robust wet and dry vacuum cleaner. The 1,500 Watt machine features a 30-litre container and removes all kinds of dirt.



**Order no.** 1.428-568.0

- Easy Service Concept
- Strong suction power
- Cartridge filter or permanent filter basket

### Technical data

|                                   |                    |                         |
|-----------------------------------|--------------------|-------------------------|
| <b>EAN code</b>                   |                    | 4039784978515           |
| <b>Supply voltage</b>             | <b>Ph / V / Hz</b> | 1 / 220 - 240 / 50 - 60 |
| <b>Air flow</b>                   | <b>l/s</b>         | 59                      |
| <b>Vacuum</b>                     | <b>mbar / kPa</b>  | 227 / 22.7              |
| <b>Container content</b>          | <b>l</b>           | 30                      |
| <b>Container material</b>         |                    | Stainless steel         |
| <b>Rated input power</b>          | <b>W</b>           | max. 1500               |
| <b>Standard nominal width</b>     |                    | ID 35                   |
| <b>Cable length</b>               | <b>m</b>           | 6.5                     |
| <b>Sound pressure level</b>       | <b>dB(A)</b>       | 78                      |
| <b>Colour</b>                     |                    | silver                  |
| <b>Weight without accessories</b> | <b>kg</b>          | 8                       |
| <b>Weight incl. packaging</b>     | <b>kg</b>          | 10.9                    |
| <b>Dimensions (L × W × H)</b>     | <b>mm</b>          | 375 × 360 × 645         |

### Equipment

|                                  |                      |                 |
|----------------------------------|----------------------|-----------------|
| <b>Suction hose</b>              | <b>m</b>             | 2.5 / with bend |
| <b>Suction tube</b>              | <b>Piece(s) × mm</b> | 1 × 505 / Steel |
| <b>Filter bag</b>                | <b>Piece(s)</b>      | 1 / Fleece      |
| <b>Wet/dry floor nozzle</b>      | <b>mm</b>            | 360             |
| <b>Crevice nozzle</b>            |                      | ■               |
| <b>Cartridge filter</b>          |                      | PES             |
| <b>Stainless steel container</b> |                      | ■               |

■ Included in the scope of supply.



## Compact, robust and mobile

- Excellent stability, easy manoeuvrability and convenient transport thanks to its slimline form and 4 castors.
- The bumper offers secure all-round protection for the vacuum cleaner and equipment.



## Excellent suction power

- NT Classic devices with a powerful 1,500 W turbine reliably remove a wide range of dirt.
- For excellent cleaning results.



## Service and comfort

- Sensationally fast: the Easy Service Concept allows removal of the turbine in just 44 seconds.
- The rapid turbine change not only saves an enormous amount of time, but also costs.

## ACCESSORIES FOR NT 30/1 ME CLASSIC EDITION

### 1.428-568.0



|  |    | Order no.   | Description   |   |
|--|----|-------------|---|---|
| <b>CARTRIDGE FILTER, STANDARD, UP TO BIA C, DUST CLASS M</b>   |    |             |   |   |
| <b>Cartridge filter paper</b>  |    |             |   |   |
| Cartridge filter, paper  | 1  | 6.414-789.0 | Paper cartridge filter with larger filter surface, standard for NT 48/1 and optional for NT 27/1/Me Advanced.   | ■ |
| <b>Cartridge filter PES</b>  |    |             |   |   |
| Cartridge filter PES, suitable for NT Me Classic 20/1, 30/1, 38/1  | 2  | 2.885-891.0 | Moisture-resistant PES cartridge filter for wet and dry vacuum cleaning.  | ■ |
| <b>SUCTION NOZZLES</b>   |    |             |   |   |
| <b>Floor nozzles</b>   |    |             |   |   |
| Floor tool replacement Edition   | 3  | 9.755-549.0 | Edition floor nozzle in DN 35 for wet and dry vacuum cleaner from Kärcher. Made from plastic and includes rollers, brush strips and squeegees. Working width: 300 mm.                             | ■ |
| <b>Crevice nozzles</b>   |    |             |   |   |
| Crevice nozzle, DN 35, plastic, 340 mm   | 4  | 9.770-638.0 | Plastic crevice nozzle for effortless and thorough vacuuming of areas that are very difficult to access such as crevices, gaps or corners. 340 mm long, nominal diameter DN 35.                   | ■ |
| <b>Car cleaning nozzles</b>  |    |             |   |   |
| Car nozzle, ID 35, 90 mm   | 5  | 6.906-108.0 | Flat angled, convenient, plastic, DN 35 car cleaning nozzle designed for all Kärcher wet and dry vacuum cleaners with bends. Working width: Approx. 90 mm.  | □ |
| <b>SUCTION TUBES</b>   |    |             |   |   |
| <b>Suction tubes, metal</b>  |    |             |   |   |
| Suction tube, DN 35, length 505 mm, steel, black, suitable for: T 8/1, T 14/1, NT 20/1, NT 30/1, NT 38/1 | 6  | 2.889-415.0 | Black steel suction tube with a nominal diameter of DN 35 and a length of 505 mm for wet and dry vacuum cleaners from Kärcher.  | ■ |
| <b>SUCTION HOSES</b>   |    |             |   |   |
| <b>Suction hoses with clip system 1.0 (compatible with vacuum cleaners up to model year 2016)</b>        |    |             |   |   |
| Suction hose with bend, NT, DN 35, length 2.5 m, clip 1.0, bayonet 1.0                                   | 7  | 9.755-263.0 | The suction hose with bend in nominal width DN 35 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners.   | ■ |
| <b>FILTER BAGS</b>   |    |             |   |   |
| <b>Fleece filter bags</b>  |    |             |   |   |
| Fleece filter bags, 10 × , NT 30/1   | 8  | 9.755-358.0 | Tear-resistant 3-layer fleece filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 10-pack.   | □ |
| <b>OTHER ACCESSORIES NT</b>  |    |             |   |   |
| Drilling dust nozzle   | 9  | 2.679-000.0 | Drilling dust nozzle for dust-free vacuuming of boreholes. Suitable for dry and wet and dry vacuum cleaners from Kärcher.   | □ |
| Cyclone preseparator CS 40 Me  | 10 | 2.863-026.0 | The highly efficient CS 40 Me cyclone preseparator for all Kärcher wet and dry vacuum cleaners is a specially designed accessory for fine dust applications on construction sites or in industry. | □ |

■ Included in the scope of supply. □ Available accessories.

## HD 5/15 C

Practical, mobile, versatile: the HD 5/15 C cold water high-pressure cleaner for vertical and horizontal operation. With accessory storage, brass cylinder head and automatic pressure relief.



Made in Germany



1-2 h



EASY!Force



EASY!Lock

Order no. **1.520-930.0**

- Automatic pressure relief
- For horizontal and vertical operation
- Save time and energy: EASY!Force high-pressure gun and EASY!Lock quick-release fasteners

| Technical data            |             |                 |
|---------------------------|-------------|-----------------|
| EAN code                  |             | 4054278164588   |
| Supply voltage            | Ph / V / Hz | 1 / 230 / 50    |
| Flow rate                 | l/h         | 500             |
| Inlet temperature         | °C          | 60              |
| Working pressure          | bar / MPa   | 150 / 15        |
| Max. pressure             | bar / MPa   | 200 / 20        |
| Connected load            | kW          | 2.8             |
| Power cable               | m           | 5               |
| Nozzle size               | mm          | 32              |
| Water inlet               |             | 3/4"            |
| Colour                    |             | anthracite      |
| Weight (with accessories) | kg          | 25.7            |
| Weight incl. packaging    | kg          | 27.9            |
| Dimensions (L × W × H)    | mm          | 380 × 360 × 930 |

| Equipment                      |    |                    |
|--------------------------------|----|--------------------|
| Spray gun                      |    | EASY!Force         |
| High-pressure hose             | m  | 10 / DN 6, 200 bar |
| Spray lance                    | mm | 840                |
| Triple nozzle (0° / 25° / 40°) |    | manual             |
| Cleaning agent function        |    | Suction            |
| Pressure switch-off            |    | ■                  |

■ Included in the scope of supply.



## Save time and energy: EASY!Force high-pressure gun and EASY!Lock quick-release fasteners

- Fatigue-free work at last: the EASY!Force high pressure gun.
- EASY!Lock quick-release couplings: durable and robust. And five times faster than screws.



## Portability

- Integrated carrying handle on the front of the machine enables easy loading and convenient transport.
- Push handle can be retracted at the push of a button.
- Compact construction style.



## Flexibility

- Vertical and horizontal operation possible.
- The wheels are not on during horizontal operation. As such, the machine offers maximum stability.
- Separate park and transport position for the spray unit.

## ACCESSORIES FOR HD 5/15 C 1.520-930.0



|   |    | Order no.   | Description  |   |
|---|----|-------------|--|---|
| <b>TRIGGER GUNS</b>                                   |    |             |  |   |
| <b>Spray guns</b>                                     |    |             |  |   |
| EASY!Force Advanced                                   | 1  | 4.118-005.0 | Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.                                | ■ |
| EASY!Force conversion kit 1 - from high-pressure hose | 2  | 4.111-050.0 | For retrofitting Kärcher high-pressure cleaners with existing high-pressure hose: EASY!Force conversion kit 1 with EASY!Force high-pressure gun, spray lance and all adapters through to the nozzle. | □ |
| EASY!Force conversion kit 2 - from machine            | 3  | 4.111-051.0 | Developed for retrofitting existing high-pressure cleaners from Kärcher: EASY!Force conversion kit 2 with EASY!Force high-pressure gun, spray lance, high-pressure hose and necessary adapters.      | □ |
| EASY!Force conversion kit 3 - high-pressure gun       | 4  | 4.111-052.0 | Compatible with existing high-pressure hose and spray lance: EASY!Force conversion kit 3, incl. EASY!Force trigger gun and all necessary adapters for upgrading your high-pressure cleaner.          | □ |
| <b>SPRAY LANCES</b>                                   |    |             |  |   |
| <b>Rotating spray lances</b>                          |    |             |  |   |
| Spray lance, 840 mm, rotatable                        | 5  | 4.112-006.0 | 850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.  | ■ |
| LED nozzle light                                      | 6  | 2.680-002.0 | Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.                    | □ |
| Spray lance, 250 mm, rotatable                        | 7  | 4.112-027.0 | Spray lance, 250 mm, rotatable, ergonomic  | □ |
| Spray lance, 400 mm, rotatable                        | 8  | 4.112-024.0 | Spray lance, 400 mm, rotatable, ergonomic  | □ |
| Spray lance, 600 mm, rotatable                        | 9  | 4.112-007.0 | 600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.  | □ |
| Spray lance, 1050 mm, rotatable                       | 10 | 4.112-000.0 | 1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.   | □ |
| Spray lance, 1550 mm, rotatable                       | 11 | 4.112-018.0 | 1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.   | □ |
| Spray lance, 2050 mm, rotatable                       | 12 | 4.112-021.0 | 2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.   | □ |
| Spray lance extender, 1000 mm                         | 13 | 4.112-048.0 | Spray lance extension with EASY!Lock connection. Length 1000 mm.   | □ |
| <b>Double lance</b>                                   |    |             |  |   |
| Double lance, 960 mm                                  | 14 | 2.112-016.0 | 960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use ( e.g. stable cleaning).   | □ |

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR HD 5/15 C 1.520-930.0



|   | Order no. | Description |  |
|---|-----------|-------------|--|
| <b>SPRAY LANCES</b>                                     |           |             |  |
| <b>Angular spray lance</b>                              |           |             |  |
| Spray lance for toilets and rain gutters                | 15        | 4.112-029.0 | Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets. <input type="checkbox"/>  |
| <b>Flexible spray lance</b>                             |           |             |  |
| Flexible lance, 1050 mm                                 | 16        | 4.112-035.0 | 1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters. <input type="checkbox"/>  |
| High pressure articulated joint                         | 17        | 4.112-057.0 | For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer. <input type="checkbox"/>   |
| <b>Gutter cleaner</b>                                   |           |             |  |
| Gutter cleaning lance                                   | 18        | 2.112-015.0 | The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates. <input type="checkbox"/>   |
| <b>Undercarriage spray lance</b>                        |           |             |  |
| Underbody lance   | 19        | 4.112-032.0 | Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle. <input type="checkbox"/>   |
| <b>Additional handle</b>                                |           |             |  |
| Additional handle for EASY!Lock spray lances            | 20        | 4.321-380.0 | Comfortable in every situation - the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task. Regularly changing your posture relieves the strain on your body, making work more relaxed. Thanks to the 360°-rotatable spray lance, the additional handle can simply be fully rotated whilst working for greater flexibility. <input type="checkbox"/> |
| <b>PowerControl spray lance</b>                         |           |             |  |
| PowerControl spray lance 034                            | 21        | 4.112-045.0 | Infinitely variable pressure adjustment during operation directly in the operator's gripping area, especially for machines without servo control function. The cleaning performance can be adapted to the respective task in an instant. The low pressure mode for the application of the cleaning agent and the adjustment of the jet level round off the product. <input type="checkbox"/>   |
| <b>MULTIPLE-JET NOZZLES</b>                             |           |             |  |
| <b>Triple nozzles</b>                                   |           |             |  |
| Triple nozzle, 032                                      | 22        | 4.117-027.0 | Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For machines with an injector, the low-pressure flat stream is useful for cleaning agent suction and application. <input checked="" type="checkbox"/>  |
| <b>HIGH-PRESSURE HOSES</b>                              |           |             |  |
| <b>Standard with unions on both sides</b>               |           |             |  |
| High-pressure hose, 10 m, ID 6, 250 bar, 2 × EASY!Lock  | 23        | 6.110-034.0 | 10 m long high-pressure hose with EASY!Lock manual screw fitting on both sides. Nominal size DN 6, suitable up to 250 bar. <input checked="" type="checkbox"/>   |
| High-pressure hose, 10 m, ID 10, 220 bar, 2 × EASY!Lock | 24        | 6.110-041.0 | Impressive values and basic equipment: 10 m long high-pressure hose (DN 10) developed for pressures up to 220 bar. <input type="checkbox"/>  |
| High-pressure hose, 10 m, ID 6, 250 bar, 2 × EASY!Lock  | 25        | 6.110-035.0 | 10 m long high-pressure hose (DN 6) equipped with EASY!Lock manual screw fitting on both sides. Suitable up to 250 bar and with ANTI!Twist. <input type="checkbox"/>   |
| High-pressure hose, 10 m, ID 6, 300 bar, 2 × EASY!Lock  | 26        | 6.110-056.0 | High-pressure hose (DN 6) equipped with ANTI!Twist and the new EASY!Lock manual screw fitting on both sides. For pressures up to 300 bar. 10 m long. <input type="checkbox"/>  |
| High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock  | 27        | 6.110-031.0 | High-pressure hose (DN 8) suitable up to 315 bar pressure. With innovative EASY!Lock manual screw fitting on both sides, ANTI!Twist and 10 m long. <input type="checkbox"/>  |
| High-pressure hose, 15 m, ID 8, 315 bar, 2 × EASY!Lock  | 28        | 6.110-030.0 | 15 m long high-pressure hose, DN 8, with ANTI!Twist and time-saving EASY!Lock manual screw fitting on both sides. <input type="checkbox"/>   |

■ Included in the scope of supply.  Available accessories.

## ACCESSORIES FOR HD 5/15 C 1.520-930.0



|  | Order no. | Description |  |                          |
|--|-----------|-------------|--|--------------------------|
| <b>HIGH-PRESSURE HOSES</b>   |           |             |  |                          |
| <b>Standard with unions on both sides</b>  |           |             |  |                          |
| High-pressure hose, 20 m, ID 8, 315 bar, 2 × EASY!Lock                           | 29        | 6.110-032.0 | 20 m long high-pressure hose (DN 8) equipped with the time-saving and robust EASY!Lock manual screw fitting on both sides. Approved for pressures up to 315 bar.   | <input type="checkbox"/> |
| High-pressure hose, 30 m, ID 8, 315 bar, 2 × EASY!Lock                           | 30        | 6.110-014.0 | Comfortable length (30 m) and innovative EASY!Lock manual screw fitting: High-pressure hose (DN 8) with ANTI!Twist for pressures up to 315 bar.  | <input type="checkbox"/> |
| High-pressure hose, 15 m, ID 10, 220 bar, 2 × EASY!Lock                          | 31        | 6.110-042.0 | Equipped with innovative EASY!Lock manual screw fitting and suitable for pressures up to 220 bar: 15 m long high-pressure hose (DN 10).  | <input type="checkbox"/> |
| High-pressure hose, 20 m, ID 10, 220 bar, 2 × EASY!Lock                          | 32        | 6.110-043.0 | 20 m in length and the extremely time-saving and comfortable EASY!Lock manual screw fitting on both sides are some of the main features of this high-pressure hose (DN 10).  | <input type="checkbox"/> |
| High-pressure hose, 25 m, ID 10, 220 bar, 2 × EASY!Lock                          | 33        | 6.110-044.0 | Impressive values and basic equipment: 25 m long high-pressure hose (DN 10) developed for pressures up to 220 bar.   | <input type="checkbox"/> |
| High-pressure hose, 40 m, ID 10, 220 bar, 2 × EASY!Lock                          | 34        | 6.110-045.0 | 40 m long high-pressure hose with EASY!Lock system for the time-saving manual screw connection (both sides). Nominal size (DN) 10, working pressure up to 220 bar.   | <input type="checkbox"/> |
| High-pressure hose, 15 m, ID 12, 210 bar, 2 × EASY!Lock                          | 35        | 6.110-059.0 | Designed for working pressures up to 250 bar: High-pressure hose (DN 12) with a length of 15 m. Has the comfortable EASY!Lock manual screw fitting on both sides.  | <input type="checkbox"/> |
| High-pressure hose, 40 m, ID 12, 210 bar, 2 × EASY!Lock                          | 36        | 6.110-060.0 | With EASY!Lock manual screw fitting and lots of room for manoeuvre thanks to 40 m in length: High-pressure hose (DN 12) with EASY!Lock manual screw fitting on both sides. Suitable for working pressures up to 250 bar. | <input type="checkbox"/> |
| <b>Longlife 400 with unions on both sides</b>                                    |           |             |  |                          |
| High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 2 × EASY!Lock                 | 37        | 6.110-024.0 | 1.5 m short high-pressure hose (DN 8). Comfortable EASY!Lock manual screw fitting on both sides for robust and quick connections. Durable and designed for up to 400 bar pressure.                                       | <input type="checkbox"/> |
| High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5 | 38        | 6.110-069.0 | 1.5 m long high-pressure hose (DN 8) suitable for up to 400 bar pressure with double steel core. Connections: M 22 × 1.5, as well as the comfortable and quick EASY!Lock manual screw fitting.                           | <input type="checkbox"/> |
| High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock                  | 39        | 6.110-038.0 | Durable, 10 m long high-pressure hose (DN 8) with double steel core and EASY!Lock manual screw fitting on both sides and ANTI!Twist. Approved for 400 bar pressure.  | <input type="checkbox"/> |
| High-pressure hose Longlife, 30 m, ID 8, 400 bar, 2 × EASY!Lock                  | 40        | 6.110-023.0 | Robust high-pressure hose with double steel core, ANTI!Twist and EASY!Lock manual screw fitting on both sides. Nominal size DN 8, 30 m long, for up to 400 bar pressure.   | <input type="checkbox"/> |
| High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock                  | 41        | 6.110-027.0 | High-pressure hose with ANTI!Twist, EASY!Lock manual screw fittings and double steel core. 20 m long, nominal size DN 8, EASY!Lock manual screw fitting on both sides.   | <input type="checkbox"/> |
| High-pressure hose Longlife, 15 m, ID 8, 400 bar, 2 × EASY!Lock                  | 42        | 6.110-029.0 | The double steel core ensures a particularly long life of this 15 m long high-pressure hose (DN 8), which is approved for pressures up to 400 bar.   | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR HD 5/15 C

### 1.520-930.0



|  |    | Order no.   | Description   |                          |
|--|----|-------------|---|--------------------------|
| <b>HIGH-PRESSURE HOSES</b>   |    |             |   |                          |
| <b>Food industry version with unions on both sides</b>                         |    |             |   |                          |
| High-pressure hose food grade, 15 m, ID 6, 250 bar, 2 × EASY!Lock              | 43 | 6.110-063.0 | 15 m long high-pressure hose (ID 6), food grade, with AVS hose reel connection, EASY!Lock hand screw connection and grey, non-marking outer covering.                                     | <input type="checkbox"/> |
| High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × EASY!Lock              | 44 | 6.110-051.0 | High-pressure hose (ID 6), 10 m long, with grey, non-marking outer covering. Approved for use in the food industry. With quick and robust EASY!Lock hand screw connection at both ends.   | <input type="checkbox"/> |
| High-pressure hose food grade, 20 m, ID 8, 250 bar, 2 × EASY!Lock              | 45 | 6.110-052.0 | Suitable for use in food industry: 20 m long high-pressure hose (ID 8) with grey, non-marking outer covering, ANTI!Twist and EASY!Lock hand screw connections.                            | <input type="checkbox"/> |
| <b>Longlife food design with screw connections at both ends</b>                |    |             |   |                          |
| High-pressure hose food grade Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock     | 46 | 6.110-053.0 | With blue, non-marking and animal fat resistant outer covering: durable high-pressure hose (ID 8), 10 m long, ANTI!Twist and EASY!Lock hand screw connection at both ends.                | <input type="checkbox"/> |
| High-pressure hose food grade Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock     | 47 | 6.110-054.0 | Durable high-pressure hose with double steel reinforcement and blue, non-marking and animal fat resistant outer covering. 20 m long with EASY!Lock hand screw connections.                | <input type="checkbox"/> |
| <b>Special hoses</b>   |    |             |   |                          |
| High-pressure hose curved, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5 | 48 | 6.110-068.0 | For connection to hose reels: high-pressure hose, with M 22 × 1.5 connection and curved EASY!Lock hand screw connection. 1.5 m long, suitable for up to 400 bar working pressure.         | <input type="checkbox"/> |
| <b>POWER GENERATOR</b>   |    |             |   |                          |
| PGG 6/1  | 49 | 1.042-208.0 | With a power rating of 5 kW, the petrol-operated synchronous generator PGG 6/1 impresses with up to 10 hours of independent power supply in many commercial and municipal applications.   | <input type="checkbox"/> |
| <b>ROTARY NOZZLES (DIRT BLASTERS)</b>  |    |             |   |                          |
| <b>Dirt blaster, small</b>   |    |             |   |                          |
| Dirt blaster, small, 035   | 50 | 4.114-019.0 | The new performance dirt blaster (nozzle size 035) with rotating point jet makes a big difference: up to 50% higher cleaning and area performance than its predecessor.                   | <input type="checkbox"/> |
| <b>Dirt blaster, large</b>   |    |             |   |                          |
| Dirt blaster, large, 035   | 51 | 4.114-040.0 | The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. | <input type="checkbox"/> |
| <b>KÄRCHER POWER NOZZLE</b>  |    |             |   |                          |
| <b>HP nozzle spray angle 0°</b>  |    |             |   |                          |
| Power nozzle 0°, 040   | 52 | 2.113-001.0 | High-pressure nozzle with powerful jet for extremely stubborn dirt.   | <input type="checkbox"/> |
| <b>Power nozzle spray angle 15°</b>  |    |             |   |                          |
| Power nozzle 15°, 034  | 53 | 2.113-042.0 | Flat jet nozzle for stubborn dirt.  | <input type="checkbox"/> |
| <b>Power nozzle spray angle 25°</b>  |    |             |   |                          |
| Power nozzle 25°, 034  | 54 | 2.113-000.0 | Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.  | <input type="checkbox"/> |
| <b>Power nozzle spray angle 40°</b>  |    |             |   |                          |
| Power nozzle 40°, 040  | 55 | 2.113-003.0 | Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.   | <input type="checkbox"/> |
| <b>ECO!BOOSTER</b>   |    |             |   |                          |
| eco!Booster TR 033   | 56 | 2.113-085.0 | eco!Booster with 50% higher area performance than the Kärcher power nozzle for cold and hot water high-pressure cleaners (nozzle size 033); ideal for delicate surfaces.                  | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR HD 5/15 C 1.520-930.0



57



58



59



60



61



62



63-65, 69-71



66-68

|  |    | Order no.   | Description   |                          |
|--|----|-------------|---|--------------------------|
| <b>QUICK CONNECT</b>                         |    |             |   |                          |
| Quick coupling                               | 57 | 2.115-000.0 | For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.         | <input type="checkbox"/> |
| Male coupling                                | 58 | 2.115-001.0 | Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 × 1.5 external thread.   | <input type="checkbox"/> |
| <b>DRUM AND TANK CLEANING</b>                |    |             |   |                          |
| Add-on kit mud sucker                        | 59 | 2.641-798.0 | For connection to the high-pressure hose of Kärcher high-pressure cleaners: Powerful sludge suction cleaner for the retrofitting of high-pressure cleaners to dirt pumps.             | <input type="checkbox"/> |
| <b>OTHER HP ACCESSORIES</b>                  |    |             |   |                          |
| Starting current limiter                     | 60 | 2.637-495.0 | Reduces starting current in single-phase supply and protects line fuse.   | <input type="checkbox"/> |
| Jet gun                                      | 61 | 2.869-067.0 | Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume. | <input type="checkbox"/> |
| <b>NOZZLE UNION / SPACER</b>                 |    |             |   |                          |
| <b>Nozzle union</b>                          |    |             |   |                          |
| Nozzle screws                                | 62 | 4.112-011.0 | Nozzle screws with protectors for high-pressure and power nozzles   | <input type="checkbox"/> |
| <b>PIPE CLEANING</b>                         |    |             |   |                          |
| <b>Pipe cleaning hose, ID 6</b>              |    |             |   |                          |
| Hose assembly TR pipe cleaning DN6 14MPa     | 63 | 6.110-108.0 | 10 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).  | <input type="checkbox"/> |
|  | 64 | 6.110-109.0 | The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).  | <input type="checkbox"/> |
|  | 65 | 6.110-110.0 | 30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).  | <input type="checkbox"/> |
| Pipe cleaning hose, ID 6, 10 m, max. 250 bar | 66 | 6.110-046.0 | The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).  | <input type="checkbox"/> |
| Pipe cleaning hose, ID 6, 20 m, max. 250 bar | 67 | 6.110-008.0 | The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).  | <input type="checkbox"/> |
| Pipe cleaning hose, ID 6, 30 m, max. 250 bar | 68 | 6.110-047.0 | The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).  | <input type="checkbox"/> |
| Pipe cleaning hose, ID 6, 10 m, max. 140 bar | 69 | 6.110-048.0 | 10 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).  | <input type="checkbox"/> |
| Pipe cleaning hose, ID 6, 20 m, max. 140 bar | 70 | 6.110-049.0 | The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).  | <input type="checkbox"/> |

Available accessories.

## ACCESSORIES FOR HD 5/15 C 1.520-930.0



|  | Order no. | Description |  |
|--|-----------|-------------|--|
| <b>PIPE CLEANING</b>                         |           |             |  |
| <b>Pipe cleaning hose, ID 6</b>              |           |             |  |
| Pipe cleaning hose, ID 6, 30 m, max. 140 bar | 71        | 6.110-050.0 | 30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle). <input type="checkbox"/>  |
| <b>Pipe cleaning nozzle</b>                  |           |             |  |
| Pipe cleaning dirt blaster D21/040           | 72        | 4.765-001.0 | The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling. <input type="checkbox"/>   |
| Pipe cleaning dirt blaster D30/040           | 73        | 4.765-004.0 |  |
| Pipe cleaning nozzle                         | 74        | 5.763-015.0 | 16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes. <input type="checkbox"/>  |
|  | 75        | 5.763-020.0 | <input type="checkbox"/>   |
|  | 76        | 5.763-017.0 | Pipe cleaning nozzle with inner thread. Different spray directions. The hose moves freely through the pipe. (R 1/8" connection, 3 × 30° backwards, diameter 30 mm.) <input type="checkbox"/>   |
| Rotating pipe cleaning nozzle                | 77        | 6.415-428.0 | Pipe cleaning nozzle with four rotating jets and inner thread. Different spray directions. The hose moves freely through the pipe. With R 1/8" connection. <input type="checkbox"/>  |
| <b>FLOOR AND HARD SURFACE CLEANER</b>        |           |             |  |
| <b>FR Classic surface cleaner</b>            |           |             |  |
| FR Classic surface cleaner                   | 78        | 2.111-016.0 | The ideal entry-level model in the Kärcher surface cleaner range for cleaning surfaces indoors and outdoors. With splash guard and up to 150 bar working pressure. <input type="checkbox"/>  |
| <b>Hard Surface Cleaner FRV 30</b>           |           |             |  |
| FRV 30 Surface Cleaner                       | 79        | 2.111-010.0 | With the integrated, automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient and can be used in both inside and outside areas. There is no longer a need to rinse the surface after cleaning, since the dirty water can be discharged through the 5 m suction hose supplied. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1000 l/h / 60°C. <input type="checkbox"/> |
| Rubber lip for FRV 30                        | 80        | 2.642-910.0 | For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes. <input type="checkbox"/>   |
| Extension hose 5 m                           | 81        | 4.440-939.0 | 5m extension hose for FRV 30. Connection sleeve included. <input type="checkbox"/>   |
| Hose fastening attachment kit                | 82        | 2.642-528.0 | Suction cup for fixing the suction hose to smooth surfaces. <input type="checkbox"/>   |
| Dirt trap attachment kit                     | 83        | 2.642-532.0 | Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas. <input type="checkbox"/>  |
| <b>Hard surface cleaner FR 30</b>            |           |             |  |
| FR 30 Surface Cleaner                        | 84        | 2.111-011.0 | Up to 10 times greater area performance compared with the conventional high-pressure jet. Plastic casing for optimal manoeuvrability, double ceramic bearing for long working times, flexible connection joint for optimal handling and integrated parking position. Machine-specific nozzle kit must be ordered separately. Max. 180 bar / 850 l/h / 60°C. <input type="checkbox"/>   |

Available accessories.

## ACCESSORIES FOR HD 5/15 C 1.520-930.0



|  |    | Order no.   | Description  |                          |
|--|----|-------------|--|--------------------------|
| <b>FLOOR AND HARD SURFACE CLEANER</b>                        |    |             |  |                          |
| <b>FR 30 Me surface cleaner</b>                              |    |             |  |                          |
| Hard Surface Cleaner FR 30 Me                                | 85 | 2.111-013.0 | Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.   | <input type="checkbox"/> |
| <b>Machine-specific nozzle kits for FR</b>                   |    |             |  |                          |
| Nozzle kit for FR, 450 l/h - 500 l/h                         | 86 | 2.640-482.0 | Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (450 to 500 l/h).   | <input type="checkbox"/> |
| <b>Machine-specific nozzle kits for FRV</b>                  |    |             |  |                          |
| Nozzle kit for FRV, 035                                      | 87 | 2.642-430.0 | Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.  | <input type="checkbox"/> |
| <b>Machine-specific nozzle kits for FR Classic</b>           |    |             |  |                          |
| Nozzle kit for FR Classic, 034                               | 88 | 2.885-313.0 | Nozzle kit specifically for FR Classic surface cleaner.  | <input type="checkbox"/> |
| <b>FRV 30 Me surface cleaner</b>                             |    |             |  |                          |
| FRV 30 Me Surface Cleaner                                    | 89 | 2.111-012.0 | Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.                                   | <input type="checkbox"/> |
| Extension hose FRV 30 Me and FRV 50 Me                       | 90 | 4.441-040.0 | 5 m extension hose for FRV 30 Me. Includes connecting adapter.   | <input type="checkbox"/> |
| <b>FOAM SYSTEMS</b>  |    |             |  |                          |
| <b>Cup foam lance</b>  |    |             |  |                          |
| Cup foam lance Advanced 1, 400 l/h - 600 l/h                 | 91 | 4.112-063.0 | High-quality and robust cup foam lance Advanced 1 with spray angle adjustment and main body made of Ecobross. Suitable for Kärcher high-pressure cleaners with a flow rate of 400 to 600 l/h.  | <input type="checkbox"/> |
| Cup foam lance DUO Advanced 1, 400 l/h - 600 l/h             | 92 | 4.112-067.0 | DUO Advanced 1 cup foam lance with two-litre detergent tank and direct switching to high-pressure cleaning. Suitable for Kärcher pressure washers with a flow rate of 400 to 600 l/h.  | <input type="checkbox"/> |
| Cup foam lance Basic 1, 350 l/h - 600 l/h                    | 93 | 4.112-053.0 | For high-pressure cleaners with a flow rate of 350-600 l/h: new, robust and very high-quality Basic 1 cup foam lance with outstanding foam quality while consuming half as much cleaning agent.  | <input type="checkbox"/> |
| 1-litre cleaning agent container for cup foam lance basic    | 94 | 5.071-414.0 | For the quick change of the cleaning agent: Additional 1 litre cleaning agent container for basic foam lance (2.112-053.0, 2.112-054.0 and 2.112-055.0).   | <input type="checkbox"/> |
| 1-litre cleaning agent container for cup foam lance advanced | 95 | 6.414-050.0 | Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).  | <input type="checkbox"/> |
| <b>Inno Foam Kit</b>   |    |             |  |                          |
| Inno Foam Set with detergent injector                        | 96 | 2.112-000.0 | High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.                                  | <input type="checkbox"/> |
| <b>Easy Foam Set</b>   |    |             |  |                          |
| Easy Foam Set with RM injector                               | 97 | 2.112-010.0 | HP foam system for use with HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately. | <input type="checkbox"/> |
| <b>Nozzle kits for Inno/Easy Foam Set</b>                    |    |             |  |                          |
| Nozzle kit 055 for Inno / Easy Set 500-600 l/h               | 98 | 2.111-009.0 | Optimal adaptation to different machine outputs for economic use.  | <input type="checkbox"/> |

Available accessories.

## ACCESSORIES FOR HD 5/15 C 1.520-930.0



|   | Order no. | Description |   |                          |
|---|-----------|-------------|---|--------------------------|
| <b>FOAM SYSTEMS</b>   |           |             |   |                          |
| <b>Foam nozzle mounting kit</b>                                     |           |             |   |                          |
| Foam nozzle attachment kit  | 99        | 2.112-013.0 | Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.            | <input type="checkbox"/> |
| <b>MIXERS AND INJECTORS</b>   |           |             |   |                          |
| <b>Cleaning agent injector</b>                                      |           |             |   |                          |
| Cleaning agent injector for high and low pressure (without nozzles) | 100       | 4.637-032.0 | Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.  | <input type="checkbox"/> |
| Cleaning agent injector for high pressure (without nozzle)          | 101       | 4.637-033.0 | Cleaning agent dosage at high pressure 3 - 5 %  | <input type="checkbox"/> |
| <b>Machine-specific nozzle kit with order no. 4.637-033.0</b>       |           |             |   |                          |
| Nozzle kit HD 500-700 l/h   | 102       | 4.769-005.0 | For HD 500 - 700 l/h. Consists of nozzle insert + HP power nozzle + union   | <input type="checkbox"/> |
| <b>Nozzle insert with order no. 4.637-032.0</b>                     |           |             |   |                          |
| Nozzle insert up to 1,100 l/h - high pressure                       | 103       | 4.769-003.0 | Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h. | <input type="checkbox"/> |
| Nozzle insert up to 1,100 l/h - low pressure                        | 104       | 4.769-001.0 | For low pressure with machines up to 1.100 l/h  | <input type="checkbox"/> |
| <b>COUPLING PARTS</b>   |           |             |   |                          |
| <b>Rotary coupling</b>  |           |             |   |                          |
| Rotary coupling   | 105       | 4.111-021.0 | Reliably prevents twisting of HP hoses. Connection Easy!Lock. Handle protection   | <input type="checkbox"/> |
| <b>Connector</b>  |           |             |   |                          |
| Screw socket for surface cleaners and Servo Control controllers     | 106       | 4.111-022.0 | For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) - 1 x M 22 x 1.5/1 x M 18 x 1.5.                       | <input type="checkbox"/> |
| Y distributor   | 107       | 4.111-024.0 | Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.  | <input type="checkbox"/> |
| Short spray unit  | 108       | 4.111-038.0 | For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.                       | <input type="checkbox"/> |
| <b>EASY!Lock adapter</b>  |           |             |   |                          |
| Adapter 1 M22AG-TR22AG  | 109       | 4.111-029.0 | Adapter 1 to connect the old hose with the new hose   | <input type="checkbox"/> |
| Adapter 2 M22IG-TR22AG  | 110       | 4.111-030.0 | Adapter 2 to connect the old device with the new hose and the old gun with the new hose   | <input type="checkbox"/> |
| Adapter 3 M22IG-TR22AG  | 111       | 4.111-031.0 | Adapter 3 to connect the old gun with the new spray lance and new servo regulator   | <input type="checkbox"/> |
| Adapter 4 TR22IG-D11  | 112       | 4.111-032.0 | Adapter 4 to connect the new gun with the old swivel hose   | <input type="checkbox"/> |

Available accessories.

## ACCESSORIES FOR HD 5/15 C 1.520-930.0



|  | Order no. | Description   |                          |
|--|-----------|---|--------------------------|
| <b>COUPLING PARTS</b>  |           |   |                          |
| <b>EASY!Lock adapter</b>   |           |   |                          |
| Adapter 5 TR22IG-M22AG   | 113       | 4.111-033.0 Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance  | <input type="checkbox"/> |
| Adapter 6 TR22IG-M22AG   | 114       | 4.111-034.0 Adapter 6 to connect the new device with the old hose and the old hose with the new gun   | <input type="checkbox"/> |
| Adapter 7 M18IG-TR20AG   | 115       | 4.111-035.0 Adapter 7 to connect the old spray lance with the new nozzle  | <input type="checkbox"/> |
| Adapter 8 TR20IG-M18AG   | 116       | 4.111-036.0 Adapter 8 to connect the new spray lance with the old nozzle  | <input type="checkbox"/> |
| Adapter hose extension 9 TR  | 117       | 4.111-037.0 Adapter 9 to connect the new hose with the new hose   | <input type="checkbox"/> |
| Adapter 12 rotary coupling EASY!Lock 22 IG - M22 x 1.8 AG          | 118       | 4.111-046.0 Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection  | <input type="checkbox"/> |
| <b>HOSE REELS</b>  |           |   |                          |
| <b>Automatic, self-winding hose reels for wall mounting</b>        |           |   |                          |
| Automatic plastic hose reel incl. high-pressure hose, 15 m         | 119       | 2.639-257.0 Spring-mounted and ready-to-use automatic hose reel for wall mounting. Simplifies handling of the high-pressure hose, shortens set-up times and increases occupational safety.  | <input type="checkbox"/> |
| Automatic hose reel, powder-coated steel / plastic, 20 m           | 120       | 6.392-074.0 Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.   | <input type="checkbox"/> |
| Automatic stainless steel / synthetic material hose drum, 20 m     | 121       | 6.392-083.0 Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.  | <input type="checkbox"/> |
| Automatic hose reel, coated, 20 m                                  | 122       | 6.392-106.0 Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.  | <input type="checkbox"/> |
| Hose reel, automatic, basalt grey-coated, 20 m                     | 123       | 6.392-105.0 Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. For example: order no. 6.110-011.0 (ID 8, 20 m, 315 bar) or order no. 6.110-028.0 (ID 8, 20 m, 400 bar Longlife).        | <input type="checkbox"/> |
| Automatic hose reel, stainless steel, includes swivel holder, 20 m | 124       | 6.392-076.0 Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.  | <input type="checkbox"/> |
| Automatic stainless steel hose reel, 40 m                          | 125       | 6.392-442.0 Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit). | <input type="checkbox"/> |
| Zinc-coated swivel holder  | 126       | 2.639-931.0 Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.   | <input type="checkbox"/> |

Available accessories.

## ACCESSORIES FOR HD 5/15 C 1.520-930.0



|   | Order no. | Description   |                          |
|---|-----------|---|--------------------------|
| <b>HOSE REELS</b>   |           |   |                          |
| <b>Automatic, self-winding hose reels for wall mounting</b> |           |   |                          |
| Stainless steel swivel holder                               | 127       | 2.641-867.0 Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.                                      | <input type="checkbox"/> |
| <b>FACADE AND SOLAR PANEL CLEANING</b>                      |           |   |                          |
| <b>Brushes</b>  |           |   |                          |
| Drive for roller brush 500                                  | 128       | 4.762-584.0 Hydraulic drive for rotating roller brushes. For cleaning façades or solar power installations with our professional high-pressure cleaners. Installation on spray lance or telescopic lance. | <input type="checkbox"/> |
| Splash guard for roller brush 500                           | 129       | 4.762-621.0 Splash guard with velcro fastening for rotating roller brush. Clear view of the brush thanks to transparent film, with protection against splashes at the same time.                          | <input type="checkbox"/> |
| Roller brush 500 soft                                       | 130       | 4.762-623.0 Soft brush attachment for use with hydraulic drive (4.762-584.0). Ideal for glass and solar power installation cleaning. Easy quick-change system and secure mounting on drive.               | <input type="checkbox"/> |
| Roller brush 500 medium                                     | 131       | 4.762-624.0 Medium-hard brush attachment for use with hydraulic drive (4.762-584.0). Suitable for sensitive façades, foils and fabrics. Easy and safe quick-change system.                                | <input type="checkbox"/> |
| Roller brush 500 hard                                       | 132       | 4.762-625.0 Hard brush attachment for use with hydraulic drive (4.762-584.0). For rough façades, stone and wooden patios. Safe and easy quick-change system.  | <input type="checkbox"/> |
| Brush hard  | 133       | 6.960-133.0 Brush with hard bristles for cleaning industry facades and floor coverings and removing coarse dirt. Simple installation on telescopic lances or high-pressure lances from Kärcher.           | <input type="checkbox"/> |
| Brush medium  | 134       | 6.960-134.0 Optimally cleans facades, roller shutters and textile fabrics: the brush with medium-hard bristles for fast and simple attachment to telescopic lances or high-pressure lances from Kärcher.  | <input type="checkbox"/> |
| Brush soft  | 135       | 6.960-135.0 For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems.           | <input type="checkbox"/> |
| <b>Telescopic lances</b>                                    |           |   |                          |
| TL low pressure adapter                                     | 136       | 4.580-097.0 TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes.                                    | <input type="checkbox"/> |
| Telescopic lance TL 7 F                                     | 137       | 4.762-609.0 Telescopic lance TL 7 F with up to 7 m reach made from robust and lightweight glass fibre. With practical quick-release fasteners for simple retraction and extension.                        | <input type="checkbox"/> |
| Telescopic lance TL 7 H                                     | 138       | 4.762-610.0 Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix. Telescopic thanks to quick-release fastenings. Up to 7 m reach.                          | <input type="checkbox"/> |
| Telescopic lance TL 10 H                                    | 139       | 4.762-611.0 Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners. | <input type="checkbox"/> |
| Telescopic lance TL 10 C                                    | 140       | 4.762-612.0 Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels.                        | <input type="checkbox"/> |

Available accessories.

## ACCESSORIES FOR HD 5/15 C 1.520-930.0



|   | Order no. | Description |   |                          |
|---|-----------|-------------|---|--------------------------|
| <b>FACADE AND SOLAR PANEL CLEANING</b>                              |           |             |   |                          |
| <b>Telescopic lances</b>  |           |             |   |                          |
| Telescopic lance TL 14 C  | 141       | 4.762-613.0 | Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners.                       | <input type="checkbox"/> |
| TL high pressure adapter  | 142       | 4.775-154.0 | TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals.                        | <input type="checkbox"/> |
| <b>WET BLASTING ATTACHMENT</b>                                      |           |             |   |                          |
| <b>Wet blasting attachment (without nozzle)</b>                     |           |             |   |                          |
| Wet blasting attachment with flow control (without nozzles)         | 143       | 4.115-000.0 | Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.   | <input type="checkbox"/> |
| Wet blasting attachment without flow control (nozzles not included) | 144       | 4.115-006.0 | Addition of spray agent to the high pressure jet. For paint stripping, rust removal and descaling. Assembly on spray lance instead of high-pressure nozzle. Without water flow regulation                   | <input type="checkbox"/> |
| <b>Nozzle kits for wet jet unit</b>                                 |           |             |   |                          |
| Nozzle kit for wet jet unit 035                                     | 145       | 2.112-021.0 | Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.115-000.0   4.115-006.0. | <input type="checkbox"/> |
| <b>Boron carbide nozzle</b>   |           |             |   |                          |
| Boron carbide nozzle, for machines up to 1,000 l/h                  | 146       | 6.415-084.0 | In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.   | <input type="checkbox"/> |
| <b>WATER CONNECTION</b>   |           |             |   |                          |
| <b>Geka coupling</b>  |           |             |   |                          |
| Geka connector with hose barb, R 1/2"                               | 147       | 6.388-461.0 | with hose liner   | <input type="checkbox"/> |
| Geka connector with hose barb, R 3/4"                               | 148       | 6.388-455.0 |   | <input type="checkbox"/> |
| Geka connector with hose barb, R 1"                                 | 149       | 6.388-465.0 | with hose barb  | <input type="checkbox"/> |
| Geka connector with inner thread, R 3/4"                            | 150       | 6.388-473.0 | with female thread  | <input type="checkbox"/> |
| <b>Suction filter</b>   |           |             |   |                          |
| Water suction filter  | 151       | 6.414-956.0 | Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve  | <input type="checkbox"/> |
| Suction filter with check valve                                     | 152       | 4.730-012.0 | Brass suction filter suitable for ponds, storage tanks, etc. With check valve.  | <input type="checkbox"/> |
| <b>Water fine filter</b>  |           |             |   |                          |
| Universal water fine filter, 25 µm                                  | 153       | 2.637-020.0 | Water fine filter, mesh size 25 µm, max. temperature 50 °C. Protects the machine from small dirt particles in the water. Water volume up to 1200 l/h. 3/4" connection, with 1" adapter.                     | <input type="checkbox"/> |
| Water fine filter, with adapter                                     | 154       | 4.730-102.0 | Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".    | <input type="checkbox"/> |

Available accessories.

## ACCESSORIES FOR HD 5/15 C 1.520-930.0



155



156



157



158



159



160

|  | Order no.       | Description  |                          |
|--|-----------------|--|--------------------------|
| <b>WATER CONNECTION</b>                                      |                 |  |                          |
| <b>Water supply hose</b>                                     |                 |  |                          |
| Water supply hose  | 155 4.440-038.0 | NW 13 R1" / R 3/4", up to 30 °C  | <input type="checkbox"/> |
|  | 156 4.440-207.0 | NW 19 R1" / R 3/4", up to 85 °C, for pick-up   | <input type="checkbox"/> |
| <b>WASHING BRUSHES</b>                                       |                 |  |                          |
| <b>Push-on washing brush</b>                                 |                 |  |                          |
| Push-on wash brush   | 157 4.113-001.0 | For universal use for surface cleaning. Mounted using clamp directly at the spray lance. TR thread connection  | <input type="checkbox"/> |
|  | 158 4.762-497.0 | The wash brush is fitted directly onto the devices' new dual and triple nozzles using clamping.  | <input type="checkbox"/> |
| <b>Rotating washing brush</b>                                |                 |  |                          |
| Rotating wash brush for < 1000 l/h machines, nylon bristles  | 159 4.113-004.0 | The rotating wash brush gently removes fine dust and traffic film from all surfaces. Temperature resistant up to 60°C. (M 18 × 1.5, replaceable brush insert). | <input type="checkbox"/> |
| Rotating wash brush for < 800 l/h machines, natural bristles | 160 4.113-003.0 | Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 × 1.5 (replaceable brush insert).   | <input type="checkbox"/> |

Available accessories.

## WVP 10 ADV

Our battery powered WVP 10 window- and surface vacuum cleaner is always comfortable to hold whether you are working on horizontal or vertical surfaces, or even overhead. Ideal for all smooth surfaces such as windows and tiles.



**Order no.** 1.633-560.0

- WVP 10 Adv with fast charge function
- Replaceable battery
- Virtually uninterrupted working

### Technical data

|   |        |                               |
|---|--------|-------------------------------|
| <b>EAN code</b>                                   |        | 4054278348605                 |
| <b>Working width of suction nozzle</b>            | mm     | 280                           |
| <b>Working width of the narrow suction nozzle</b> | mm     | 170                           |
| <b>Dirty water container capacity</b>             | ml     | 200                           |
| <b>Battery charge time</b>                        | min    | 50                            |
| <b>Battery run time</b>                           | min    | 35                            |
| <b>Battery type</b>                               |        | Removable lithium-ion battery |
| <b>Battery voltage</b>                            | V      | 3.7                           |
| <b>Supply voltage</b>                             | V / Hz | 220 - 240 / 50 - 60           |
| <b>Colour</b>                                     |        | anthracite                    |
| <b>Weight without accessories</b>                 | kg     | 1                             |
| <b>Weight incl. packaging</b>                     | kg     | 2.3                           |
| <b>Weight incl. battery</b>                       | kg     | 1                             |
| <b>Dimensions (L × W × H)</b>                     | mm     | 280 × 130 × 335               |

### Equipment

|   |    |           |
|---|----|-----------|
| <b>Surface Cleaner Concentrate CA 30 R (1 × 500 ml)</b> |    | ■         |
| <b>Spray bottle (500 ml)</b>                            |    | ■         |
| <b>Microfibre wiping cloth Indoor</b>                   |    | 1 x       |
| <b>Microfibre wiping cloth, outdoor</b>                 |    | 1 x       |
| <b>Suction nozzle width</b>                             | mm | 280 / 170 |
| <b>Battery</b>  |    | ■         |
| <b>Interchangeable battery included</b>                 |    | ■         |
| <b>Fast charging station</b>                            |    | ■         |
| <b>Dirty water tank</b>                                 | ml | 200       |
| <b>Dirt scraper</b>                                     |    | ■         |

■ included in the scope of supply.



### Lightweight, ergonomic and universal

- Suitable for all types of smooth surfaces – horizontal, vertical or even overhead.
- Comfortable handling and easy to operate.
- Safe, pleasant handling thanks to rubber handle.



### Removable, replaceable battery

- Allows external battery charging and, in conjunction with a spare battery, uninterrupted working.
- Charging state is displayed by 3 LEDs above the ON/OFF switch.



### Convenient cleaning of edges

- Streak-free cleaning results right up to the edges thanks to the manually adjustable spacer.

## ACCESSORIES FOR WVP 10 ADV

### 1.633-560.0



|   |   | Order no.   | Description  |   |
|---|---|-------------|--|---|
| <b>BATTERY POWERED WINDOW CLEANER</b>     |   |             |  |   |
| <b>Replacement batteries</b>              |   |             |  |   |
| Exchangeable battery for the WV 5 and WVP | 1 | 2.633-123.0 | Non-stop cleaning: the exchangeable battery for the WV 5 and WVP window vacs makes this possible.  | ■ |
| <b>Squeegee blades</b>                    |   |             |  |   |
| WV 2 / WV 5 squeegee blade, 280 mm        | 2 | 2.633-005.0 | For replacing the squeegee blades of WV 50, WV 75, WV 2 and WV 5 Window Vacs. For streak-free cleanliness on all smooth surfaces - without leaving drips.  | □ |
| <b>Wiping cloths</b>                      |   |             |  |   |
| WV indoor microfibre wiping cloths        | 3 | 2.633-130.0 | The microfibre wiping cloth with hook-and-loop fastener fastening for optimal dirt removal with the spray bottle of the WV on all smooth surfaces.         | □ |
| WV outdoor microfibre wiping cloths       | 4 | 2.633-131.0 | Ideal for external windows: the outdoor microfibre wiping cloth with hook-and-loop fastening and lots of abrasive fibres. Incl. scraper for stubborn dirt. | □ |
| <b>Extensions</b>                         |   |             |  |   |
| Extension kit                             | 5 | 2.633-144.0 | With the telescopic extension kit for the Window Vac and the vibrating cordless wiper, you can even clean high windows. Extendible from 0.6 to 1.5 metres. | □ |
| <b>SUCTION NOZZLES</b>                    |   |             |  |   |
| Nozzle 280 mm                             | 6 | 9.013-530.3 | Spare nozzle, anthracite, 280 mm wide, for WVP window and surface vacuum cleaner.  | ■ |
| Nozzle 170 mm                             | 7 | 9.013-535.3 | 170 mm wide, anthracite-coloured spare nozzle for WVP window and surface vacuum cleaner.   | ■ |
| <b>BATTERIES AND BATTERY CHARGERS</b>     |   |             |  |   |
| Replacement charging station WVP 10 Adv   | 8 | 2.633-041.0 | Replacement quick-charging station for charging WVP battery 2.633-123.0. Charge time 50 minutes.   | ■ |

■ Included in the scope of supply. □ Available accessories.

## NT 75/2 TACT<sup>2</sup> ME TC

High mobility and power, stamina, robustness and a wide range of practical equipment features make Kärcher Tact<sup>2</sup> vacuum cleaners sought-after specialists and all-rounders. The models with tilting chassis offer advantages, particularly for industrial applications, in the disposal of liquids and coarse dirt.



### Order no.

1.667-289.0

- Automatic Filter Cleaning System Tact<sup>2</sup>
- Push handle and drain hose
- Moisture-proof PES filter

### Technical data

|                            |             |                         |
|----------------------------|-------------|-------------------------|
| EAN code                   |             | 4039784727274           |
| Supply voltage             | Ph / V / Hz | 1 / 220 - 240 / 50 - 60 |
| Air flow                   | l/s         | 2 × 74                  |
| Vacuum                     | mbar / kPa  | 254 / 25.4              |
| Container content          | l           | 75                      |
| Container material         |             | Stainless steel         |
| Rated input power          | W           | max. 2760               |
| Standard nominal width     |             | ID 40                   |
| Cable length               | m           | 10                      |
| Sound pressure level       | dB(A)       | 73                      |
| Colour                     |             | silver                  |
| Weight without accessories | kg          | 29                      |
| Weight incl. packaging     | kg          | 36.6                    |
| Dimensions (L × W × H)     | mm          | 685 × 560 × 920         |

### Equipment

|  |               |  |
|--|---------------|--|
| Suction hose                                       | m             | 4 / electrically conductive                        |
| Suction tube                                       | Piece(s) × mm | 2 × 550 / Stainless steel                          |
| Filter bag   | Piece(s)      | 1 / Paper  |
| Wet/dry floor nozzle                               | mm            | 360  |
| Crevice nozzle                                     |               | ■  |
| Drain hose (oil-resistant)                         |               | ■  |
| Automatic cut-out features at max. filling quality |               | ■  |
| Anti-static system                                 |               | ■  |
| Stainless steel container                          |               | ■  |
| Flat pleated filter                                |               | PES  |
| Tilting chassis                                    |               | ■  |
| Filter cleaning                                    |               | Automatic Filter Cleaning System Tact <sup>2</sup> |
| Sturdy bumper                                      |               | ■  |
| Push handle  |               | ■  |
| Protection class                                   |               | II   |
| Stop swivel castor                                 |               | ■  |

■ Included in the scope of supply.




### Tilting chassis with container lock

- The container is always securely attached to the chassis.



### Drain hose for emptying liquids

- Cover remains tightly closed until the contents are drained.

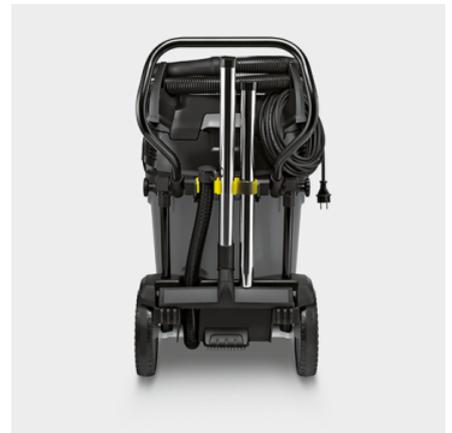

### Suction tubes and floor nozzles can be stored in any direction in the accessory holders

- For easy access from all sides.
- Ample storage for a 4 m hose and rubber power cable (10 m).

## ACCESSORIES FOR NT 75/2 TACT<sup>2</sup> ME TC

### 1.667-289.0



|  |    | Order no.   | Description   |   |
|--|----|-------------|---|---|
| <b>FLAT PLEATED FILTER, STANDARD, BIA C OR UP TO DUST CLASS M</b>                              |    |             |   |   |
| <b>Flat pleated filter, PES</b>  |    |             |   |   |
| Flat pleated filter, PES   | 1  | 6.907-277.0 | Flat pleated filter dust class M, rotproof PES fleece. Suitable for frequent wet pick up.   | ■ |
| <b>Flat pleated filter, paper</b>  |    |             |   |   |
| Flat pleated filter, paper   | 2  | 6.907-276.0 | Flat pleated filter dust class M, nano-coated paper. Suitable for fine dust and dry dirt pick up.   | □ |
| <b>Flat pleated filter, PTFE</b>   |    |             |   |   |
| Flat pleated filter, PTFE  | 3  | 6.907-449.0 | Polyester fleece with PTFE coating, dust class M, for Tact <sup>2</sup> vacuum cleaners. Particularly suitable for very adhesive materials.                                 | □ |
| <b>BENDS</b>   |    |             |   |   |
| <b>Bend, plastic</b>   |    |             |   |   |
| Bend, NT, DN 40, plastic, electrically conductive, clip 2.0 at hose end, cone at accessory end | 4  | 2.889-172.0 | Electrically conductive DN 40 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 2.0 connection at the hose end and a cone connection at the accessory end. | ■ |
| Bend, NT, DN 35, plastic, clip 1.0 at hose end, cone at accessory end                          | 5  | 5.031-718.0 | DN 35 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end.                         | □ |
| Bend, NT, DN 35, plastic, electrically conductive, clip 1.0 at hose end, cone at accessory end | 6  | 5.031-939.0 | Electrically conductive DN 35 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end. | □ |
| Bend, NT, DN 40, plastic, electrically conductive, clip 1.0 at hose end, cone at accessory end | 7  | 5.032-427.0 | Electrically conductive DN 40 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end. | □ |
| <b>Bend, other</b>   |    |             |   |   |
| Bend, NT, DN 35, chrome-plated metal, cone at hose end, cone at accessory end                  | 8  | 6.900-519.0 | DN 35 chrome-plated metal bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.                       | □ |
| Bend, NT, DN 35, stainless steel, cone at hose end, cone at accessory end                      | 9  | 6.903-141.0 | Robust DN 35 stainless steel bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.                    | □ |
| Bend, NT, DN 40, chrome-plated metal, cone at hose end, cone at accessory end                  | 10 | 6.900-276.0 | DN 40 chrome-plated metal bend for wet and dry vacuum cleaners by Kärcher. The robust bend has a cone connection at both the hose end and the accessory end.                | □ |
| Bend, NT, DN 40, stainless steel, cone at hose end, cone at accessory end                      | 11 | 6.902-079.0 | Robust DN 40 stainless steel bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.                    | □ |
| <b>SUCTION NOZZLES</b>   |    |             |   |   |
| <b>Floor nozzles</b>   |    |             |   |   |
| Wet/dry floor nozzle, advanced plastic, DN 40, width 360 mm                                    | 12 | 2.889-153.0 | 360 mm wide wet and dry floor nozzle with easy-to-change inserts, squeegees.  | ■ |
| Wet/dry floor nozzle, standard plastic, DN 35  | 13 | 2.889-173.0 | 300 millimetre width, anthracite coloured wet/dry floor nozzle, NW 35. With easy-to-change inserts. Incl. brush strips and squeegees.                                       | □ |
| Wet/dry floor nozzle, standard plastic, DN 40  | 14 | 2.889-174.0 | Standard floor nozzle, anthracite, in nominal diameter 40, with brush strips and squeegees. Suitable for all wet and dry applications.                                      | □ |

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR NT 75/2 TACT<sup>2</sup> ME TC

### 1.667-289.0



|  |    | Order no.   | Description   |                                     |
|--|----|-------------|---|-------------------------------------|
| <b>SUCTION NOZZLES</b>                           |    |             |   |                                     |
| <b>Floor nozzles</b>                             |    |             |   |                                     |
| Wet and dry floor nozzle, aluminium, DN 40       | 15 | 6.903-018.0 | All-purpose aluminium nozzle with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners.         | <input type="checkbox"/>            |
| Wet/dry floor nozzle, aluminium, DN 40           | 16 | 6.906-383.0 | All-purpose aluminium nozzle (DN 40) with 450 mm working width. With height-adjustable side rollers, brush strips (6.903-065.0) and oil-resistant squeegees (6.906-146.0). Only for NT vacuum cleaners. | <input type="checkbox"/>            |
| Wet/dry floor nozzle, aluminium, DN 35           | 17 | 6.906-384.0 | All-purpose aluminium nozzle (DN 35) with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners. | <input type="checkbox"/>            |
| Wet/dry floor nozzle, advanced plastic, DN 40    | 18 | 2.889-117.0 | The wet/dry floor nozzle (DN 40) permits a quick squeegee/brush change and is suitable for wet vacuum cleaning of large areas.  | <input type="checkbox"/>            |
| <b>Crevice nozzles</b>                           |    |             |   |                                     |
| Crevice nozzle, NT, DN 40, plastic, 300 mm       | 19 | 5.130-655.0 | Plastic crevice nozzle in nominal width DN 40 for Kärcher wet and dry vacuum cleaners. Especially suitable for vacuuming out areas that are difficult to reach, such as joints, crevices and corners.   | <input checked="" type="checkbox"/> |
| Crevice nozzle, DN 35, plastic, length 210 mm    | 20 | 2.889-130.0 | With the DN 35 plastic crevice nozzle, corners and crevices can be vacuumed quickly and thoroughly. Length: 210 mm.   | <input type="checkbox"/>            |
| Crevice nozzle, NT, DN 35, metal, 500 mm long    | 21 | 6.900-922.0 | The metal crevice nozzle (DN 35) enables vacuuming in crevices and corners. Length: 500 mm.   | <input type="checkbox"/>            |
| Crevice nozzle, NT, DN 40, metal, 400 mm         | 22 | 6.905-817.0 | Metal crevice tool (DN 40) for vacuuming in crevices and corners. Length: 400 mm.   | <input type="checkbox"/>            |
| <b>All-purpose brushes</b>                       |    |             |   |                                     |
| All-purpose brush                                | 23 | 6.903-863.0 | Natural bristles (ox hair), bristle element 120 x 45 mm.  | <input type="checkbox"/>            |
| <b>Car cleaning nozzles</b>                      |    |             |   |                                     |
| Car nozzle, ID 40, 90 mm                         | 24 | 6.900-952.0 | For retrofitting older Kärcher wet and dry vacuum cleaner models with bends in DN 40: Flat angled, convenient, plastic car cleaning nozzle with a working width of approx. 90 mm.                       | <input type="checkbox"/>            |
|  | 25 | 2.840-095.0 | Flat angled, convenient, plastic, DN 40 car cleaning nozzle specially designed for new Kärcher wet and dry vacuum cleaners with a clip system at the suction hose. Working width: Approx. 90 mm.        | <input type="checkbox"/>            |
| <b>Wide nozzles</b>                              |    |             |   |                                     |
| Squeegee nozzle NT                               | 26 | 4.130-400.0 | The metal squeegee nozzle is height adjustable and has brush strip. Only suitable for Tc models.  | <input type="checkbox"/>            |
| <b>Rubber suction tools, nose 45°</b>            |    |             |   |                                     |
| Rubber suction tool, nose 45°                    | 27 | 6.902-104.0 | 45° rubber suction nozzle (DN 35), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.  | <input type="checkbox"/>            |
| NT rubber suction nozzle, bevelled at 45°, DN 40 | 28 | 6.902-105.0 | 45° rubber suction nozzle (DN 40), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.  | <input type="checkbox"/>            |

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR NT 75/2 TACT<sup>2</sup> ME TC

### 1.667-289.0



|  |    | Order no.   | Description   |                                     |
|--|----|-------------|---|-------------------------------------|
| <b>SUCTION NOZZLES</b>   |    |             |   |                                     |
| <b>Pipe dusting nozzles</b>  |    |             |   |                                     |
| Pipe brush 35/100  | 29 | 6.903-035.0 | Plastic, pipe diameter 100 mm   | <input type="checkbox"/>            |
| Pipe brush 35/200  | 30 | 6.903-036.0 | Plastic, pipe diameter 200 mm   | <input type="checkbox"/>            |
| <b>SUCTION TUBES</b>   |    |             |   |                                     |
| <b>Suction tubes, stainless steel</b>  |    |             |   |                                     |
| Suction tube, 2 x, NT, DN 40, 550 mm long, stainless steel, suitable for: NT 50/1, NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 75/2   | 31 | 2.889-194.0 | The suction tube set consists of 2 suction tubes made of high-quality stainless steel (DN 40 and 550 mm long each). For Kärcher wet and dry vacuum cleaners.            | <input checked="" type="checkbox"/> |
| Suction tube, DN 35, 505 mm, stainless steel   | 32 | 6.902-154.0 | Suction tube made of high-quality stainless steel in DN 35 and 505 mm long for wet and dry vacuum cleaners from Kärcher.  | <input type="checkbox"/>            |
| Suction tube, NT, DN 40, 550 mm long, stainless steel, suitable for: AP 100/50, NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 72/2, NT 75/2, NT 561, NT 611, NT 802 IV  | 33 | 6.902-081.0 | Suction tube made of high-quality stainless steel in nominal width DN 40 and 550 mm long for wet and dry vacuum cleaners from Kärcher.                                  | <input type="checkbox"/>            |
| Suction tube, NT, DN 40, 1000 mm long, stainless steel, suitable for: NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 72/2, NT 75/2, NT 561, NT 611, NT 802 IV  | 34 | 6.906-531.0 | The suction tube made of high-quality stainless steel (DN 40 and 1000 mm long) is suitable for wet and dry vacuum cleaners from Kärcher.                                | <input type="checkbox"/>            |
| <b>Suction tubes, metal</b>  |    |             |   |                                     |
| Suction tube, 2 x, NT, DN 35, 550 mm long, chrome-plated steel, suitable for: NT 27/1, NT 30/1, NT 40/1, NT 50/1, NT 55/1, NT 65/2, NT 75/2  | 35 | 2.889-191.0 | The suction tube set consists of 2 chrome-plated steel suction tubes for Kärcher wet and dry vacuum cleaners, nominal width DN 35 and each suction tube is 550 mm long. | <input type="checkbox"/>            |
| Suction tube, NT, DN 35, 505 mm long, chrome-plated steel, suitable for: NT 25/1, NT 27/1, NT 30/1, NT 35/1, NT 40/1, NT 48/1, NT 50/1, NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 72/2, NT 75/1, NT 75/2, NT 611, NT 802 IV | 36 | 6.900-514.0 | The suction tube made of chrome-plated steel (DN 35, 505 mm long) is suitable for wet and dry vacuum cleaners from Kärcher.   | <input type="checkbox"/>            |
| <b>SUCTION HOSES</b>   |    |             |   |                                     |
| <b>Suction hoses with clip system 2.0 (compatible with vacuum cleaners from model year 2017 on)</b>  |    |             |   |                                     |
| Suction hose, NT, DN 40, length 4 m, electrically conductive, clip 2.0, bayonet 2.0  | 37 | 2.889-141.0 | The electrically conductive suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.                               | <input checked="" type="checkbox"/> |
| Suction hose, NT, DN 35, length 4 m, electrically conductive, clip 2.0, bayonet 2.0  | 38 | 2.889-137.0 | The electrically conductive suction hose in nominal width DN 35 and with 4 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.                  | <input type="checkbox"/>            |
| Suction hose, NT, DN 40, length 4 m, clip 2.0, bayonet 2.0   | 39 | 2.889-138.0 | The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.   | <input type="checkbox"/>            |
| Suction hose, NT, DN 40, length 2.5 m, clip 2.0, bayonet 2.0   | 40 | 2.889-139.0 | The suction hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.  | <input type="checkbox"/>            |
| Suction hose, NT, DN 40, length 4 m, oil-resistant, clip 2.0, bayonet 2.0  | 41 | 2.889-140.0 | The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.                            | <input type="checkbox"/>            |
| Suction hose, NT, DN 40, length 2.5 m, electrically conductive, clip 2.0, bayonet 2.0  | 42 | 2.889-142.0 | The electrically conductive suction hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners.                             | <input type="checkbox"/>            |

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR NT 75/2 TACT<sup>2</sup> ME TC

1.667-289.0



|  | Order no. | Description |  |                          |
|--|-----------|-------------|--|--------------------------|
| <b>SUCTION HOSES</b>   |           |             |  |                          |
| <b>Suction hoses with clip system 2.0 (compatible with vacuum cleaners from model year 2017 on)</b>          |           |             |  |                          |
| Extension hose, NT, DN 40, length 2.5 m, clip 2.0, connecting adapter  | 43        | 2.889-146.0 | The extension hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.                                 | <input type="checkbox"/> |
| Repair kit for suction hoses DN 40, Clip 2.0   | 44        | 2.889-150.0 | Repair kit ID 40 for the new clip system.  | <input type="checkbox"/> |
| <b>Hose connection</b>   |           |             |  |                          |
| Adapter, ID 32/35, with internal thread  | 45        | 6.902-077.0 | Electrically non-conductive adapter with internal thread. For connecting two suction hoses without connectors. Suitable for DN 32 or DN 35.                        | <input type="checkbox"/> |
| Connecting adapter, ID 40, with internal thread  | 46        | 6.900-286.0 | Electrically non-conductive adapter with screw thread at both ends. For connecting 2 DN 40 suction hoses without connectors.                                       | <input type="checkbox"/> |
| <b>Suction hoses with clip system 1.0 (compatible with vacuum cleaners up to model year 2016)</b>            |           |             |  |                          |
| Repair kit for suction hoses DN 40 Clip 1.0  | 47        | 2.639-873.0 | Repair set (C40) includes threaded hose adapters (without bayonet adapter) for industrial NT vacuum cleaners with clip system.                                     | <input type="checkbox"/> |
| Extension hose, NT, DN 40, length 2.5 m, clip 1.0, connecting adapter  | 48        | 6.906-344.0 | The extension hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners.  | <input type="checkbox"/> |
| Suction hose with bend, NT, DN 40, length 4 m, clip 1.0, bayonet 1.0   | 49        | 4.440-678.0 | The suction hose with bend in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.  | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 10 m, clip 1.0, bayonet 1.0  | 50        | 6.906-279.0 | The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.   | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 4 m, clip 1.0, bayonet 1.0   | 51        | 6.906-321.0 | The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.  | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 4 m, oil-resistant, clip 1.0, bayonet 1.0                                    | 52        | 6.906-714.0 | The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.                                    | <input type="checkbox"/> |
| Suction hose with bend and PFC module, NT, DN 40, length 4 m, electrically conductive, clip 1.0, bayonet 1.0 | 53        | 4.440-728.0 | The electrically conductive suction hose with bend and PFC module in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners. | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 16 m, clip 1.0, bayonet 1.0  | 54        | 6.906-635.0 | The suction hose in nominal width DN 40 and with 16 m length is suitable for use with wet and dry vacuum cleaners.   | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 10 m, electrically conductive, clip 1.0, bayonet 1.0                         | 55        | 6.906-877.0 | The electrically conductive suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.                         | <input type="checkbox"/> |
| <b>Suction hoses with cone connection</b>  |           |             |  |                          |
| Suction hose, NT, DN 40, length 4 m, cone, bayonet 1.0   | 56        | 4.440-263.0 | The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.  | <input type="checkbox"/> |

Available accessories.

## ACCESSORIES FOR NT 75/2 TACT<sup>2</sup> ME TC

1.667-289.0



|   | Order no.      | Description  |                          |
|---|----------------|--|--------------------------|
| <b>SUCTION HOSES</b>  |                |  |                          |
| <b>Suction hoses with cone connection</b>   |                |  |                          |
| Suction hose, NT, DN 40, length 4 m, oil-resistant, cone, bayonet 1.0                         | 57 4.440-303.0 | The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.              | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 10 m, cone, bayonet 1.0                                       | 58 4.440-463.0 | The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.                           | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 10 m, electrically conductive, cone, bayonet 1.0              | 59 4.440-466.0 | The electrically conductive suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.   | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 10 m, oil-resistant, cone, bayonet 1.0                        | 60 4.440-612.0 | The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.                           | <input type="checkbox"/> |
| Suction hose, NT, DN 50, length 4 m, cone, bayonet 1.0  | 61 4.440-264.0 | The suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.                            | <input type="checkbox"/> |
| Suction hose, NT, DN 50, length 3 m, cone, bayonet 1.0  | 62 4.440-328.0 | The suction hose in nominal width DN 50 and with 3 m length is suitable for use with wet and dry vacuum cleaners.                            | <input type="checkbox"/> |
| Suction hose, NT, DN 50, length 10 m, cone, bayonet 1.0                                       | 63 4.440-467.0 | The suction hose in nominal width DN 50 and with 10 m length is suitable for use with wet and dry vacuum cleaners.                           | <input type="checkbox"/> |
| Suction hose, NT, DN 50, length 4 m, oil-resistant, cone, bayonet 1.0                         | 64 4.440-613.0 | The oil-resistant suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.              | <input type="checkbox"/> |
| Suction hose, NT, DN 50, length 4 m, electrically conductive, cone, bayonet 1.0               | 65 4.440-616.0 | The electrically conductive suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.    | <input type="checkbox"/> |
| <b>FILTER BAGS</b>  |                |  |                          |
| <b>Fleece filter bags</b>   |                |  |                          |
| Fleece filter bags, 5 × , NT 65, NT 70, NT 72, NT 75, NT 90                                   | 66 2.885-753.0 | Tear-resistant fleece filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.                       | <input type="checkbox"/> |
| <b>Paper filter bags</b>  |                |  |                          |
| Paper filter bags, 5 × , NT 48, NT 65, NT 70, NT 72, NT 75, NT 80, WET VAC                    | 67 6.904-285.0 | Premium 3-layer paper filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.                       | <input type="checkbox"/> |
| <b>FILTER T/ NT</b>   |                |  |                          |
| <b>Flat pleated filter HEPA, dust class H</b>   |                |  |                          |
| HEPA-14 flat pleated filter   | 68 6.904-364.0 | For Kärcher wet and dry vacuum cleaners: HEPA-14 (H14) flat pleated filter. Suitable for vacuuming hazardous dusts, coarse dirt and liquids. | <input type="checkbox"/> |
| <b>Wet filter bag</b>   |                |  |                          |
| Wet filter bag  | 69 6.904-252.0 | Approved for dust class L, general cleaning, wet and dry, tear-resistant.  | <input type="checkbox"/> |
| <b>Plastic sacks for dust-free disposal</b>   |                |  |                          |
| Plastic bag for dust-free disposal, 10 × , NT 65, NT 70, NT 72, NT 75, NT 602, NT 700, NT 702 | 70 6.900-698.0 | PE plastic sack.   | <input type="checkbox"/> |

Available accessories.

## ACCESSORIES FOR NT 75/2 TACT<sup>2</sup> ME TC

1.667-289.0



|   | Order no. | Description |  |
|---|-----------|-------------|--|
| <b>FILTER T/ NT</b>   |           |             |  |
| <b>Fabric filter</b>  |           |             |  |
| Candle filter Wood, NT 65/2, NT 75/2  | 71        | 2.414-003.0 | Wood cartridge filter made from textile material with PTFE coating and a brown label. For safely vacuuming large quantities of wood and fibre dust with the NT 65/2 and 75/2 twin-motor Tact vacuums. <input type="checkbox"/> |
| Membrane filter, NT 65, NT 70, NT 72, NT 75, NT 551, NT 602, NT 700, NT 702, NT 802, NT 993 | 72        | 6.904-282.0 | Polyester needle fleece membrane/fabric filter - BIA-C -, washable up to 40°C, metal fibres for earthing. Suitable for virtually all industrial two-motor NT vacuum cleaners. <input type="checkbox"/>                         |
| <b>CONNECTING SLEEVES</b>   |           |             |  |
| <b>Y-adapter kit</b>  |           |             |  |
| Y-adapter kit   | 73        | 2.637-217.0 | Plastic distributor - suitable for NT vacuum cleaners. <input type="checkbox"/>  |
| <b>Connection adapter C ID (clip to cone)</b>   |           |             |  |
| Adapter clip DN 35 on cone DN 35  | 74        | 5.407-005.0 | Adapter clip system DN 35 for connecting suction tubes and small nozzles to cone DN 35. Perfect for vehicle interior cleaning, even without the connection of other nozzles. <input type="checkbox"/>                          |
| Adapter clip DN 40 to cone DN 40  | 75        | 5.407-006.0 | For connecting small nozzles and suction tubes with cone DN 40: Adapter clip system DN 40. Ideal for vehicle interior cleaning tasks, with no need to connect additional nozzles. <input type="checkbox"/>                     |
| Connection adapter C DN 35  | 76        | 5.407-112.0 | C 35 hose connector for DN 35 accessory, electrically conductive. <input type="checkbox"/>   |
| Electrically conductive DN 40 connection adapter for DN 35 accessories                      | 77        | 5.407-109.0 | Electrically conductive adapter (C 40) with DN 35 connection for connecting DN 35 accessories to an industrial C 40 or C-DN 40 suction hose. Suitable for NT vacuum cleaners. <input type="checkbox"/>                         |
| Connection adapter C DN 40  | 78        | 5.407-111.0 | C 40 hose connector for DN 40 accessory, electrically conductive. <input type="checkbox"/>   |
| <b>Connection adapter for power tools, clip connection</b>                                  |           |             |  |
| Power tool connection adapter, DN 26-36, electrically conductive                            | 79        | 5.453-042.0 | 3-way plastic adapter. For DN 26 to DN 36. For connecting power tools to an industrial C or C-DN 35 suction hose. Suitable for NT vacuum cleaners. <input type="checkbox"/>  |
| Connection adapter for power tools, C 35, electrically conductive                           | 80        | 5.453-048.0 | Inside Ø 25.4 mm, outside Ø 34.6 mm/ 38 mm, electrically conductive. Only NT vacuums. <input type="checkbox"/>   |
|   | 81        | 5.453-050.0 | Inside Ø 27 mm, outside Ø 36.5 mm/38.8 mm, electrically conductive. Only NT vacuums. <input type="checkbox"/>  |
| <b>Adapter for electric power tools, screwable</b>  |           |             |  |
| Adapter for electric power tools, screwable, ID 35  | 82        | 5.453-016.0 | 3-way plastic adapter with fitting instructions. For DN 26 to DN 36. For connecting to an industrial DN 35 suction hose. <input type="checkbox"/>  |
|   | 83        | 5.453-026.0 | Inside Ø 28.6 mm, outside Ø 37.3/38.8 mm. <input type="checkbox"/>   |
|   | 84        | 6.902-059.0 | Electrically conductive power tool adapter, threaded. Internal diameter: 32 mm.External diameter: 39 mm. <input type="checkbox"/>  |

Available accessories.

## ACCESSORIES FOR NT 75/2 TACT<sup>2</sup> ME TC

1.667-289.0



|  | Order no. | Description |   |                          |
|--|-----------|-------------|---|--------------------------|
| <b>CONNECTING SLEEVES</b>  |           |             |   |                          |
| <b>Adapter for electric power tools, screwable</b>                               |           |             |   |                          |
| Adapter for electric power tools, screwable, ID 35                               | 85        | 6.902-095.0 | 2-way power tool adapter, threaded. For connecting to an industrial DN 35 suction hose. Internal diameter: 28 mm.External diameter: 34 mm and 38.8 mmSuitable for NT vacuum cleaners.                                   | <input type="checkbox"/> |
| <b>Reducing sleeves</b>  |           |             |   |                          |
| NT reducer from DN 40 to DN 35, electrically conductive                          | 86        | 5.407-108.0 | Threaded reducer - from C-40 to DN 35. Suitable for NT vacuum cleaners.   | <input type="checkbox"/> |
| Reducer adapter from DN 40 to DN 35  | 87        | 6.902-017.0 | Reducer, enabling accessories (upholstery nozzle, crevice nozzle, etc.) with a DN 35 connection adapter to be connected to accessory parts (bend or suction tube) that have a DN 40 connection adapter.                 | <input type="checkbox"/> |
| NT reduction bushing with clip system for DN 40 suction hoses on accessory DN 35 | 88        | 5.407-113.0 | Reducer (C 40 to C 35) for connecting accessories with C-35 clip connection to suction hoses with C 40 clip system.   | <input type="checkbox"/> |
| Reducer from ID 35 to ID 32  | 89        | 6.902-072.0 | Reducer with internal connecting cone DN 32. Ideal for accessories from the industrial vacuum cleaner range in combination with industrial NT vacuum cleaners.  | <input type="checkbox"/> |
| <b>Reduction/expansion adapter kit</b>   |           |             |   |                          |
| Set of reducers / adapter sleeves  | 90        | 2.860-117.0 | DN 40/35, DN 35/32 (tube -> nozzle), plastic.   | <input type="checkbox"/> |
| <b>TARGET-GROUP-SPECIFIC ACCESSORY KITS FOR VACUUM CLEANERS</b>                  |           |             |   |                          |
| Professional cleaning kit NT DN 40   | 91        | 2.637-353.0 | Professional wet and dry accessory kit in nominal size DN 40 for Kärcher vacuum cleaners. The wet and dry professional cleaning kit comprises a suction hose, bend, two suction tubes, crevice nozzle and floor nozzle. | <input type="checkbox"/> |
| NT accessory kit for vacuuming chips, DN 50                                      | 92        | 2.640-760.0 | The accessory kit in nominal width DN 50 makes it easier to vacuum chips with the wet and dry vacuum cleaner. The kit comprises an oil-resistant suction hose, a crevice nozzle and a rubber suction nozzle.            | <input type="checkbox"/> |
| <b>OTHER ACCESSORIES NT</b>  |           |             |   |                          |
| Cyclone preseparator CS 40 Me  | 93        | 2.863-026.0 | The highly efficient CS 40 Me cyclone preseparator for all Kärcher wet and dry vacuum cleaners is a specially designed accessory for fine dust applications on construction sites or in industry.                       | <input type="checkbox"/> |
| Adapter for NT hoses with bayonet connection 1.0                                 | 94        | 5.031-436.0 | Electroconductive adapter for connecting NT hoses with bayonet 1.0 connection of nominal widths DN 35, 40, 50 to the new accessory system for wet and dry vacuum cleaners from Kärcher.                                 | <input type="checkbox"/> |
| <b>MODIFICATION KIT, NON-CONDUCTIVE MEDIA</b>                                    |           |             |   |                          |
| Attachment kit, non-conductive media Tact <sup>2</sup> + Ap                      | 95        | 2.642-602.0 | For switching off when vacuuming non-conductive fluids such as oils and greases   | <input type="checkbox"/> |
| <b>OTHER ACCESSORIES SCRUBBER DRIERS</b>   |           |             |   |                          |
| <b>Miscellaneous</b>   |           |             |   |                          |
| Extension cable  | 96        | 6.647-022.0 | Extension cable, 20 m, 3x1.5 mm <sup>2</sup> . With splash-proof earthing pin plug, strain relief and anti-kink sleeve.   | <input type="checkbox"/> |
| <b>EMPTYING SUPPORTS</b>   |           |             |   |                          |
| <b>Strainer baskets</b>  |           |             |   |                          |
| Sieve basket IVC   | 97        | 5.731-645.0 | Plastic swarf sieve, perforated, with internal thread. For protecting the drain hose against very abrasive suction material such as coarse shavings.  | <input type="checkbox"/> |

Available accessories.

## NT 75/2 TACT<sup>2</sup> ME TC ADV

Mobile, robust and versatile all-rounder with high suction power and area performance and unique Tact<sup>2</sup> filter cleaning system for uninterrupted cleaning operations.



### Order no.

1.667-316.0

- Automatic Filter Cleaning System Tact<sup>2</sup>
- Push handle and drain hose
- Squeegee nozzle with 640 mm width


### Technical data

|                            |             |                         |
|----------------------------|-------------|-------------------------|
| EAN code                   |             | 4054278477848           |
| Supply voltage             | Ph / V / Hz | 1 / 220 - 240 / 50 - 60 |
| Air flow                   | l/s         | 2 × 74                  |
| Vacuum                     | mbar / kPa  | 254 / 25.4              |
| Container content          | l           | 75                      |
| Container material         |             | Stainless steel         |
| Rated input power          | W           | max. 2760               |
| Standard nominal width     |             | ID 40                   |
| Cable length               | m           | 30                      |
| Sound pressure level       | dB(A)       | 73                      |
| Colour                     |             | silver                  |
| Weight without accessories | kg          | 28.6                    |
| Weight incl. packaging     | kg          | 46                      |
| Dimensions (L × W × H)     | mm          | 670 × 560 × 930         |

### Equipment

|  |               |  |
|--|---------------|--|
| Suction hose                                       | m             | 4 / electrically conductive                        |
| Suction tube                                       | Piece(s) × mm | 2 × 550 / Stainless steel                          |
| Filter bag   | Piece(s)      | 1 / Paper  |
| Wet/dry floor nozzle                               | mm            | 360  |
| Crevice nozzle                                     |               | ■  |
| Squeegee nozzle                                    | mm            | 640  |
| Drain hose (oil-resistant)                         |               | ■  |
| Automatic cut-out features at max. filling quality |               | ■  |
| Anti-static system                                 |               | ■  |
| Stainless steel container                          |               | ■  |
| Flat pleated filter                                |               | PES  |
| Tilting chassis                                    |               | ■  |
| Filter cleaning                                    |               | Automatic Filter Cleaning System Tact <sup>2</sup> |
| Sturdy bumper                                      |               | ■  |
| Push handle  |               | ■  |
| Protection class                                   |               | II   |
| Stop swivel castor                                 |               | ■  |

■ Included in the scope of supply.

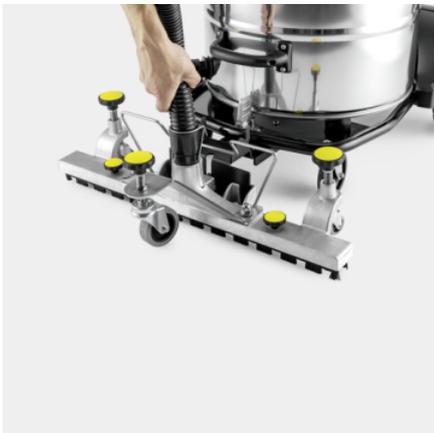

### Extra wide squeegee nozzle

- Efficient vacuuming even with large quantities of dirt and liquid.
- Quickly achieves maximum area performance thanks to 640 mm width.
- Separate chassis on the nozzle for best vacuuming results.



### Convenient drain hose

- Effortless and safe disposal of vacuumed liquids.
- Contactless emptying for maximum occupational safety.



### Direction-independent accessory storage

- Secure storage of suction tubes and floor nozzle.
- Additional space for 4 m hose and 30 m rubberised power cable.
- Accessories easy to hand at any time and from any angle.

## ACCESSORIES FOR NT 75/2 TACT<sup>2</sup> ME TC ADV

### 1.667-316.0



|  |    | Order no.   | Description   |   |
|--|----|-------------|---|---|
| <b>FLAT PLEATED FILTER, STANDARD, BIA C OR UP TO DUST CLASS M</b>                              |    |             |   |   |
| <b>Flat pleated filter, PES</b>  |    |             |   |   |
| Flat pleated filter, PES   | 1  | 6.907-277.0 | Flat pleated filter dust class M, rotproof PES fleece. Suitable for frequent wet pick up.   | ■ |
| <b>Flat pleated filter, paper</b>  |    |             |   |   |
| Flat pleated filter, paper   | 2  | 6.907-276.0 | Flat pleated filter dust class M, nano-coated paper. Suitable for fine dust and dry dirt pick up.   | □ |
| <b>Flat pleated filter, PTFE</b>   |    |             |   |   |
| Flat pleated filter, PTFE  | 3  | 6.907-449.0 | Polyester fleece with PTFE coating, dust class M, for Tact <sup>2</sup> vacuum cleaners. Particularly suitable for very adhesive materials.                                 | □ |
| <b>BENDS</b>   |    |             |   |   |
| <b>Bend, plastic</b>   |    |             |   |   |
| Bend, NT, DN 40, plastic, electrically conductive, clip 2.0 at hose end, cone at accessory end | 4  | 2.889-172.0 | Electrically conductive DN 40 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 2.0 connection at the hose end and a cone connection at the accessory end. | ■ |
| Bend, NT, DN 35, plastic, clip 1.0 at hose end, cone at accessory end                          | 5  | 5.031-718.0 | DN 35 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end.                         | □ |
| Bend, NT, DN 35, plastic, electrically conductive, clip 1.0 at hose end, cone at accessory end | 6  | 5.031-939.0 | Electrically conductive DN 35 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end. | □ |
| Bend, NT, DN 40, plastic, electrically conductive, clip 1.0 at hose end, cone at accessory end | 7  | 5.032-427.0 | Electrically conductive DN 40 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end. | □ |
| <b>Bend, other</b>   |    |             |   |   |
| Bend, NT, DN 35, chrome-plated metal, cone at hose end, cone at accessory end                  | 8  | 6.900-519.0 | DN 35 chrome-plated metal bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.                       | □ |
| Bend, NT, DN 35, stainless steel, cone at hose end, cone at accessory end                      | 9  | 6.903-141.0 | Robust DN 35 stainless steel bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.                    | □ |
| Bend, NT, DN 40, chrome-plated metal, cone at hose end, cone at accessory end                  | 10 | 6.900-276.0 | DN 40 chrome-plated metal bend for wet and dry vacuum cleaners by Kärcher. The robust bend has a cone connection at both the hose end and the accessory end.                | □ |
| Bend, NT, DN 40, stainless steel, cone at hose end, cone at accessory end                      | 11 | 6.902-079.0 | Robust DN 40 stainless steel bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.                    | □ |
| <b>SUCTION NOZZLES</b>   |    |             |   |   |
| <b>Floor nozzles</b>   |    |             |   |   |
| Wet/dry floor nozzle, advanced plastic, DN 40, width 360 mm                                    | 12 | 2.889-153.0 | 360 mm wide wet and dry floor nozzle with easy-to-change inserts, squeegees.  | ■ |
| Wet/dry floor nozzle, standard plastic, DN 35  | 13 | 2.889-173.0 | 300 millimetre width, anthracite coloured wet/dry floor nozzle, NW 35. With easy-to-change inserts. Incl. brush strips and squeegees.                                       | □ |
| Wet/dry floor nozzle, standard plastic, DN 40  | 14 | 2.889-174.0 | Standard floor nozzle, anthracite, in nominal diameter 40, with brush strips and squeegees. Suitable for all wet and dry applications.                                      | □ |

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR NT 75/2 TACT<sup>2</sup> ME TC ADV 1.667-316.0




|   |    | Order no.   | Description   |                                     |
|---|----|-------------|---|-------------------------------------|
| <b>SUCTION NOZZLES</b>                              |    |             |   |                                     |
| <b>Floor nozzles</b>                                |    |             |   |                                     |
| Wet and dry floor nozzle, aluminium, DN 40          | 15 | 6.903-018.0 | All-purpose aluminium nozzle with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners.         | <input type="checkbox"/>            |
| Wet/dry floor nozzle, aluminium, DN 40              | 16 | 6.906-383.0 | All-purpose aluminium nozzle (DN 40) with 450 mm working width. With height-adjustable side rollers, brush strips (6.903-065.0) and oil-resistant squeegees (6.906-146.0). Only for NT vacuum cleaners. | <input type="checkbox"/>            |
| Wet/dry floor nozzle, aluminium, DN 35              | 17 | 6.906-384.0 | All-purpose aluminium nozzle (DN 35) with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners. | <input type="checkbox"/>            |
| <b>Wide nozzles</b>                                 |    |             |   |                                     |
| Squeegee nozzle NT 75/2 Tact <sup>2</sup> Me Tc Adv | 18 | 2.130-002.0 | Extra wide metal squeegee nozzle (640 mm) for our NT 75/2 Tact <sup>2</sup> Me Tc Adv wet and dry vacuum cleaner. Height-adjustable and with a separate chassis for an excellent cleaning result.       | <input checked="" type="checkbox"/> |
| Squeegee nozzle NT                                  | 19 | 4.130-400.0 | The metal squeegee nozzle is height adjustable and has brush strip. Only suitable for Tc models.  | <input type="checkbox"/>            |
| <b>Crevice nozzles</b>                              |    |             |   |                                     |
| Crevice nozzle, NT, DN 40, plastic, 300 mm          | 20 | 5.130-655.0 | Plastic crevice nozzle in nominal width DN 40 for Kärcher wet and dry vacuum cleaners. Especially suitable for vacuuming out areas that are difficult to reach, such as joints, crevices and corners.   | <input checked="" type="checkbox"/> |
| Crevice nozzle, DN 35, plastic, length 210 mm       | 21 | 2.889-130.0 | With the DN 35 plastic crevice nozzle, corners and crevices can be vacuumed quickly and thoroughly. Length: 210 mm.   | <input type="checkbox"/>            |
| Crevice nozzle, NT, DN 35, metal, 500 mm long       | 22 | 6.900-922.0 | The metal crevice nozzle (DN 35) enables vacuuming in crevices and corners. Length: 500 mm.   | <input type="checkbox"/>            |
| Crevice nozzle, NT, DN 40, metal, 400 mm            | 23 | 6.905-817.0 | Metal crevice tool (DN 40) for vacuuming in crevices and corners. Length: 400 mm.   | <input type="checkbox"/>            |
| <b>All-purpose brushes</b>                          |    |             |   |                                     |
| All-purpose brush                                   | 24 | 6.903-863.0 | Natural bristles (ox hair), bristle element 120 x 45 mm.  | <input type="checkbox"/>            |
| <b>Car cleaning nozzles</b>                         |    |             |   |                                     |
| Car nozzle, ID 40, 90 mm                            | 25 | 6.900-952.0 | For retrofitting older Kärcher wet and dry vacuum cleaner models with bends in DN 40: Flat angled, convenient, plastic car cleaning nozzle with a working width of approx. 90 mm.                       | <input type="checkbox"/>            |
|   | 26 | 2.840-095.0 | Flat angled, convenient, plastic, DN 40 car cleaning nozzle specially designed for new Kärcher wet and dry vacuum cleaners with a clip system at the suction hose. Working width: Approx. 90 mm.        | <input type="checkbox"/>            |
| <b>Rubber suction tools, nose 45°</b>               |    |             |   |                                     |
| Rubber suction tool, nose 45°                       | 27 | 6.902-104.0 | 45° rubber suction nozzle (DN 35), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.  | <input type="checkbox"/>            |
| NT rubber suction nozzle, bevelled at 45°, DN 40    | 28 | 6.902-105.0 | 45° rubber suction nozzle (DN 40), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.  | <input type="checkbox"/>            |

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR NT 75/2 TACT<sup>2</sup> ME TC ADV

### 1.667-316.0

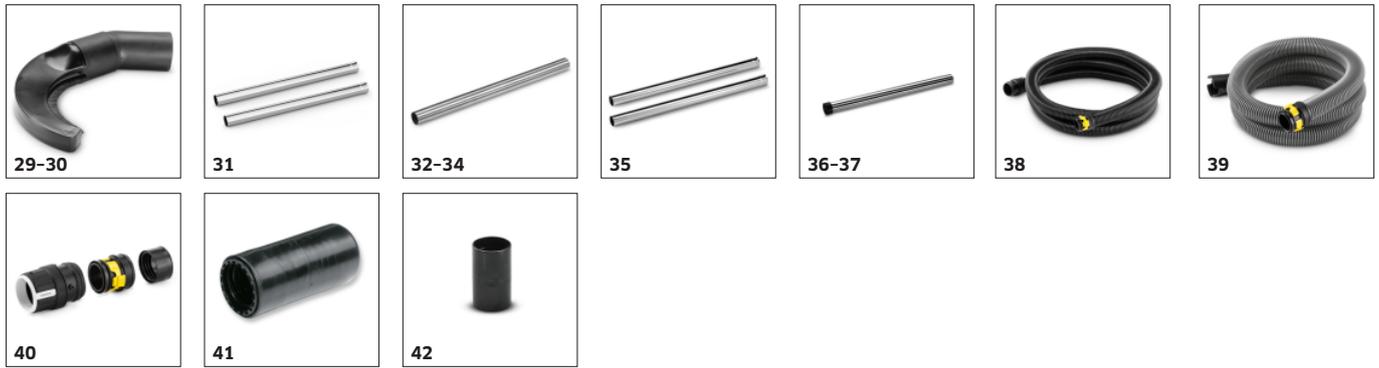

|  | Order no. | Description |  |
|--|-----------|-------------|--|
| <b>SUCTION NOZZLES</b>   |           |             |  |
| <b>Pipe dusting nozzles</b>  |           |             |  |
| Pipe brush 35/100  | 29        | 6.903-035.0 | Plastic, pipe diameter 100 mm <input type="checkbox"/>   |
| Pipe brush 35/200  | 30        | 6.903-036.0 | Plastic, pipe diameter 200 mm <input type="checkbox"/>   |
| <b>SUCTION TUBES</b>   |           |             |  |
| <b>Suction tubes, stainless steel</b>  |           |             |  |
| Suction tube, 2 x, NT, DN 40, 550 mm long, stainless steel, suitable for: NT 50/1, NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 75/2   | 31        | 2.889-194.0 | The suction tube set consists of 2 suction tubes made of high-quality stainless steel (DN 40 and 550 mm long each). For Kärcher wet and dry vacuum cleaners. <input checked="" type="checkbox"/> |
| Suction tube, DN 35, 505 mm, stainless steel   | 32        | 6.902-154.0 | Suction tube made of high-quality stainless steel in DN 35 and 505 mm long for wet and dry vacuum cleaners from Kärcher. <input type="checkbox"/>  |
| Suction tube, NT, DN 40, 550 mm long, stainless steel, suitable for: AP 100/50, NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 72/2, NT 75/2, NT 561, NT 611, NT 802 IV  | 33        | 6.902-081.0 | Suction tube made of high-quality stainless steel in nominal width DN 40 and 550 mm long for wet and dry vacuum cleaners from Kärcher. <input type="checkbox"/>                                  |
| Suction tube, NT, DN 40, 1000 mm long, stainless steel, suitable for: NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 72/2, NT 75/2, NT 561, NT 611, NT 802 IV  | 34        | 6.906-531.0 | The suction tube made of high-quality stainless steel (DN 40 and 1000 mm long) is suitable for wet and dry vacuum cleaners from Kärcher. <input type="checkbox"/>                                |
| <b>Suction tubes, metal</b>  |           |             |  |
| Suction tube, 2 x, NT, DN 35, 550 mm long, chrome-plated steel, suitable for: NT 27/1, NT 30/1, NT 40/1, NT 50/1, NT 55/1, NT 65/2, NT 75/2  | 35        | 2.889-191.0 | The suction tube set consists of 2 chrome-plated steel suction tubes for Kärcher wet and dry vacuum cleaners, nominal width DN 35 and each suction tube is 550 mm long. <input type="checkbox"/> |
| Suction tube, NT, DN 35, 505 mm long, chrome-plated steel, suitable for: NT 25/1, NT 27/1, NT 30/1, NT 35/1, NT 40/1, NT 48/1, NT 50/1, NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 72/2, NT 75/1, NT 75/2, NT 611, NT 802 IV | 36        | 6.900-514.0 | The suction tube made of chrome-plated steel (DN 35, 505 mm long) is suitable for wet and dry vacuum cleaners from Kärcher. <input type="checkbox"/>   |
| Suction tube, NT, DN 40, 550 mm long, chrome-plated steel, suitable for: NT 50/1, NT 50/2, NT 65/2, NT 70/2, NT 75/2, NT 90/2, NT 611, NT 802 IV   | 37        | 6.900-275.0 | The suction tube made of chrome-plated steel with DN 40 and 550 mm long is suitable for wet and dry vacuum cleaners from Kärcher. <input type="checkbox"/>                                       |
| <b>SUCTION HOSES</b>   |           |             |  |
| <b>Suction hoses with clip system 2.0 (compatible with vacuum cleaners from model year 2017 on)</b>  |           |             |  |
| Suction hose, NT, DN 40, length 4 m, electrically conductive, clip 2.0, bayonet 2.0  | 38        | 2.889-141.0 | The electrically conductive suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners. <input checked="" type="checkbox"/>                    |
| Extension hose, NT, DN 40, length 2.5 m, clip 2.0, connecting adapter  | 39        | 2.889-146.0 | The extension hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners from Kärcher. <input type="checkbox"/>                                      |
| Repair kit for suction hoses DN 40, Clip 2.0   | 40        | 2.889-150.0 | Repair kit ID 40 for the new clip system. <input type="checkbox"/>   |
| <b>Hose connection</b>   |           |             |  |
| Adapter, ID 32/35, with internal thread  | 41        | 6.902-077.0 | Electrically non-conductive adapter with internal thread. For connecting two suction hoses without connectors. Suitable for DN 32 or DN 35. <input type="checkbox"/>                             |
| Connecting adapter, ID 40, with internal thread  | 42        | 6.900-286.0 | Electrically non-conductive adapter with screw thread at both ends. For connecting 2 DN 40 suction hoses without connectors. <input type="checkbox"/>  |

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR NT 75/2 TACT<sup>2</sup> ME TC ADV

### 1.667-316.0



|  |    | Order no.   | Description  |                          |
|--|----|-------------|--|--------------------------|
| <b>SUCTION HOSES</b>   |    |             |  |                          |
| <b>Suction hoses with clip system 1.0 (compatible with vacuum cleaners up to model year 2016)</b>            |    |             |  |                          |
| Repair kit for suction hoses DN 40 Clip 1.0  | 43 | 2.639-873.0 | Repair set (C40) includes threaded hose adapters (without bayonet adapter) for industrial NT vacuum cleaners with clip system.                                     | <input type="checkbox"/> |
| Extension hose, NT, DN 40, length 2.5 m, clip 1.0, connecting adapter  | 44 | 6.906-344.0 | The extension hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners.  | <input type="checkbox"/> |
| Suction hose with bend, NT, DN 40, length 4 m, clip 1.0, bayonet 1.0   | 45 | 4.440-678.0 | The suction hose with bend in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.  | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 10 m, clip 1.0, bayonet 1.0  | 46 | 6.906-279.0 | The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.   | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 4 m, clip 1.0, bayonet 1.0   | 47 | 6.906-321.0 | The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.  | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 4 m, oil-resistant, clip 1.0, bayonet 1.0                                    | 48 | 6.906-714.0 | The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.                                    | <input type="checkbox"/> |
| Suction hose with bend and PFC module, NT, DN 40, length 4 m, electrically conductive, clip 1.0, bayonet 1.0 | 49 | 4.440-728.0 | The electrically conductive suction hose with bend and PFC module in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners. | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 16 m, clip 1.0, bayonet 1.0  | 50 | 6.906-635.0 | The suction hose in nominal width DN 40 and with 16 m length is suitable for use with wet and dry vacuum cleaners.   | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 10 m, electrically conductive, clip 1.0, bayonet 1.0                         | 51 | 6.906-877.0 | The electrically conductive suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.                         | <input type="checkbox"/> |
| <b>Suction hoses with cone connection</b>  |    |             |  |                          |
| Suction hose, NT, DN 40, length 4 m, cone, bayonet 1.0   | 52 | 4.440-263.0 | The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.  | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 4 m, oil-resistant, cone, bayonet 1.0  | 53 | 4.440-303.0 | The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.                                    | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 10 m, cone, bayonet 1.0  | 54 | 4.440-463.0 | The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.   | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 10 m, electrically conductive, cone, bayonet 1.0                             | 55 | 4.440-466.0 | The electrically conductive suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.                         | <input type="checkbox"/> |
| Suction hose, NT, DN 40, length 10 m, oil-resistant, cone, bayonet 1.0                                       | 56 | 4.440-612.0 | The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.   | <input type="checkbox"/> |

Available accessories.

## ACCESSORIES FOR NT 75/2 TACT<sup>2</sup> ME TC ADV

### 1.667-316.0



|   | Order no.      | Description   |                          |
|---|----------------|---|--------------------------|
| <b>SUCTION HOSES</b>  |                |   |                          |
| <b>Suction hoses with cone connection</b>   |                |   |                          |
| Suction hose, NT, DN 50, length 4 m, cone, bayonet 1.0  | 57 4.440-264.0 | The suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.   | <input type="checkbox"/> |
| Suction hose, NT, DN 50, length 3 m, cone, bayonet 1.0  | 58 4.440-328.0 | The suction hose in nominal width DN 50 and with 3 m length is suitable for use with wet and dry vacuum cleaners.   | <input type="checkbox"/> |
| Suction hose, NT, DN 50, length 10 m, cone, bayonet 1.0                                       | 59 4.440-467.0 | The suction hose in nominal width DN 50 and with 10 m length is suitable for use with wet and dry vacuum cleaners.  | <input type="checkbox"/> |
| Suction hose, NT, DN 50, length 4 m, oil-resistant, cone, bayonet 1.0                         | 60 4.440-613.0 | The oil-resistant suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.   | <input type="checkbox"/> |
| Suction hose, NT, DN 50, length 4 m, electrically conductive, cone, bayonet 1.0               | 61 4.440-616.0 | The electrically conductive suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.   | <input type="checkbox"/> |
| <b>FILTER BAGS</b>  |                |   |                          |
| <b>Fleece filter bags</b>   |                |   |                          |
| Fleece filter bags, 5 × , NT 65, NT 70, NT 72, NT 75, NT 90                                   | 62 2.885-753.0 | Tear-resistant fleece filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.  | <input type="checkbox"/> |
| <b>Paper filter bags</b>  |                |   |                          |
| Paper filter bags, 5 × , NT 48, NT 65, NT 70, NT 72, NT 75, NT 80, WET VAC                    | 63 6.904-285.0 | Premium 3-layer paper filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.  | <input type="checkbox"/> |
| <b>FILTER T/ NT</b>   |                |   |                          |
| <b>Flat pleated filter HEPA, dust class H</b>   |                |   |                          |
| HEPA-14 flat pleated filter   | 64 6.904-364.0 | For Kärcher wet and dry vacuum cleaners: HEPA-14 (H14) flat pleated filter. Suitable for vacuuming hazardous dusts, coarse dirt and liquids.  | <input type="checkbox"/> |
| <b>Wet filter bag</b>   |                |   |                          |
| Wet filter bag  | 65 6.904-252.0 | Approved for dust class L, general cleaning, wet and dry, tear-resistant.   | <input type="checkbox"/> |
| <b>Plastic sacks for dust-free disposal</b>   |                |   |                          |
| Plastic bag for dust-free disposal, 10 × , NT 65, NT 70, NT 72, NT 75, NT 602, NT 700, NT 702 | 66 6.900-698.0 | PE plastic sack.  | <input type="checkbox"/> |
| <b>Fabric filter</b>  |                |   |                          |
| Candle filter Wood, NT 65/2, NT 75/2  | 67 2.414-003.0 | Wood cartridge filter made from textile material with PTFE coating and a brown label. For safely vacuuming large quantities of wood and fibre dust with the NT 65/2 and 75/2 twin-motor Tact vacuums. | <input type="checkbox"/> |
| Membrane filter, NT 65, NT 70, NT 72, NT 75, NT 551, NT 602, NT 700, NT 702, NT 802, NT 993   | 68 6.904-282.0 | Polyester needle fleece membrane/fabric filter – BIA-C -, washable up to 40°C, metal fibres for earthing. Suitable for virtually all industrial two-motor NT vacuum cleaners.                         | <input type="checkbox"/> |
| <b>CONNECTING SLEEVES</b>   |                |   |                          |
| <b>Y-adapter kit</b>  |                |   |                          |
| Y-adapter kit   | 69 2.637-217.0 | Plastic distributor - suitable for NT vacuum cleaners.  | <input type="checkbox"/> |
| <b>Connection adapter C ID (clip to cone)</b>   |                |   |                          |
| Adapter clip DN 35 on cone DN 35  | 70 5.407-005.0 | Adapter clip system DN 35 for connecting suction tubes and small nozzles to cone DN 35. Perfect for vehicle interior cleaning, even without the connection of other nozzles.                          | <input type="checkbox"/> |

Available accessories.

## ACCESSORIES FOR NT 75/2 TACT<sup>2</sup> ME TC ADV

### 1.667-316.0



|  | Order no.      | Description   |                          |
|--|----------------|---|--------------------------|
| <b>CONNECTING SLEEVES</b>  |                |   |                          |
| <b>Connection adapter C ID (clip to cone)</b>                                    |                |   |                          |
| Adapter clip DN 40 to cone DN 40   | 71 5.407-006.0 | For connecting small nozzles and suction tubes with cone DN 40: Adapter clip system DN 40. Ideal for vehicle interior cleaning tasks, with no need to connect additional nozzles.                       | <input type="checkbox"/> |
| Connection adapter C DN 35   | 72 5.407-112.0 | C 35 hose connector for DN 35 accessory, electrically conductive.   | <input type="checkbox"/> |
| Electrically conductive DN 40 connection adapter for DN 35 accessories           | 73 5.407-109.0 | Electrically conductive adapter (C 40) with DN 35 connection for connecting DN 35 accessories to an industrial C 40 or C-DN 40 suction hose. Suitable for NT vacuum cleaners.                           | <input type="checkbox"/> |
| Connection adapter C DN 40   | 74 5.407-111.0 | C 40 hose connector for DN 40 accessory, electrically conductive.   | <input type="checkbox"/> |
| <b>Connection adapter for power tools, clip connection</b>                       |                |   |                          |
| Power tool connection adapter, DN 26-36, electrically conductive                 | 75 5.453-042.0 | 3-way plastic adapter. For DN 26 to DN 36. For connecting power tools to an industrial C or C-DN 35 suction hose. Suitable for NT vacuum cleaners.  | <input type="checkbox"/> |
| Connection adapter for power tools, C 35, electrically conductive                | 76 5.453-048.0 | Inside Ø 25.4 mm, outside Ø 34.6 mm/ 38 mm, electrically conductive. Only NT vacuums.   | <input type="checkbox"/> |
|  | 77 5.453-050.0 | Inside Ø 27 mm, outside Ø 36.5 mm/38.8 mm, electrically conductive. Only NT vacuums.  | <input type="checkbox"/> |
| <b>Adapter for electric power tools, screwable</b>                               |                |   |                          |
| Adapter for electric power tools, screwable, ID 35                               | 78 5.453-016.0 | 3-way plastic adapter with fitting instructions. For DN 26 to DN 36. For connecting to an industrial DN 35 suction hose.  | <input type="checkbox"/> |
|  | 79 5.453-026.0 | Inside Ø 28.6 mm, outside Ø 37.3/38.8 mm.   | <input type="checkbox"/> |
|  | 80 6.902-059.0 | Electrically conductive power tool adapter, threaded. Internal diameter: 32 mm.External diameter: 39 mm.  | <input type="checkbox"/> |
|  | 81 6.902-095.0 | 2-way power tool adapter, threaded. For connecting to an industrial DN 35 suction hose. Internal diameter: 28 mm.External diameter: 34 mm and 38.8 mmSuitable for NT vacuum cleaners.                   | <input type="checkbox"/> |
| <b>Reducing sleeves</b>  |                |   |                          |
| NT reducer from DN 40 to DN 35, electrically conductive                          | 82 5.407-108.0 | Threaded reducer - from C-40 to DN 35. Suitable for NT vacuum cleaners.   | <input type="checkbox"/> |
| Reducer adapter from DN 40 to DN 35  | 83 6.902-017.0 | Reducer, enabling accessories (upholstery nozzle, crevice nozzle, etc.) with a DN 35 connection adapter to be connected to accessory parts (bend or suction tube) that have a DN 40 connection adapter. | <input type="checkbox"/> |
| NT reduction bushing with clip system for DN 40 suction hoses on accessory DN 35 | 84 5.407-113.0 | Reducer (C 40 to C 35) for connecting accessories with C-35 clip connection to suction hoses with C 40 clip system.   | <input type="checkbox"/> |

Available accessories.

## ACCESSORIES FOR NT 75/2 TACT<sup>2</sup> ME TC ADV 1.667-316.0



85



86



87



88



89



90



91



92

|   | Order no. | Description   |                          |
|---|-----------|---|--------------------------|
| <b>CONNECTING SLEEVES</b>                                       |           |   |                          |
| <b>Reducing sleeves</b>   |           |   |                          |
| Reducer from ID 35 to ID 32                                     | 85        | 6.902-072.0 Reducer with internal connecting cone DN 32. Ideal for accessories from the industrial vacuum cleaner range in combination with industrial NT vacuum cleaners.  | <input type="checkbox"/> |
| <b>Reduction/expansion adapter kit</b>                          |           |   |                          |
| Set of reducers / adapter sleeves                               | 86        | 2.860-117.0 DN 40/35, DN 35/32 (tube -> nozzle), plastic.   | <input type="checkbox"/> |
| <b>TARGET-GROUP-SPECIFIC ACCESSORY KITS FOR VACUUM CLEANERS</b> |           |   |                          |
| Professional cleaning kit NT DN 40                              | 87        | 2.637-353.0 Professional wet and dry accessory kit in nominal size DN 40 for Kärcher vacuum cleaners. The wet and dry professional cleaning kit comprises a suction hose, bend, two suction tubes, crevice nozzle and floor nozzle. | <input type="checkbox"/> |
| NT accessory kit for vacuuming chips, DN 50                     | 88        | 2.640-760.0 The accessory kit in nominal width DN 50 makes it easier to vacuum chips with the wet and dry vacuum cleaner. The kit comprises an oil-resistant suction hose, a crevice nozzle and a rubber suction nozzle.            | <input type="checkbox"/> |
| <b>OTHER ACCESSORIES NT</b>                                     |           |   |                          |
| Adapter for NT hoses with bayonet connection 1.0                | 89        | 5.031-436.0 Electroconductive adapter for connecting NT hoses with bayonet 1.0 connection of nominal widths DN 35, 40, 50 to the new accessory system for wet and dry vacuum cleaners from Kärcher.                                 | <input type="checkbox"/> |
| <b>MODIFICATION KIT, NON-CONDUCTIVE MEDIA</b>                   |           |   |                          |
| Attachment kit, non-conductive media Tact <sup>2</sup> + Ap     | 90        | 2.642-602.0 For switching off when vacuuming non-conductive fluids such as oils and greases   | <input type="checkbox"/> |
| <b>OTHER ACCESSORIES SCRUBBER DRIERS</b>                        |           |   |                          |
| <b>Miscellaneous</b>  |           |   |                          |
| Extension cable   | 91        | 6.647-022.0 Extension cable, 20 m, 3x1.5 mm <sup>2</sup> . With splash-proof earthing pin plug, strain relief and anti-kink sleeve.   | <input type="checkbox"/> |
| <b>EMPTYING SUPPORTS</b>  |           |   |                          |
| <b>Strainer baskets</b>   |           |   |                          |
| Sieve basket IVC  | 92        | 5.731-645.0 Plastic swarf sieve, perforated, with internal thread. For protecting the drain hose against very abrasive suction material such as coarse shavings.  | <input type="checkbox"/> |

Available accessories.

## NT 90/2 ME CLASSIC EDITION

With its generous 90-litre container, the dual-motor NT 90/2 Me Classic wet and dry vacuum cleaner can vacuum large quantities of wet and coarse dirt. With outstanding suction power, handling and quality.



**Order no.** 1.667-700.0

- Strong suction power
- Simple turbine change
- Drain hose

### Technical data

|                                   |                    |                         |
|-----------------------------------|--------------------|-------------------------|
| <b>EAN code</b>                   |                    | 4054278070674           |
| <b>Supply voltage</b>             | <b>Ph / V / Hz</b> | 1 / 220 - 240 / 50 - 60 |
| <b>Air flow</b>                   | <b>l/s</b>         | 2 × 53                  |
| <b>Vacuum</b>                     | <b>mbar / kPa</b>  | 225 / 22.5              |
| <b>Container content</b>          | <b>l</b>           | 90                      |
| <b>Container material</b>         |                    | Stainless steel         |
| <b>Rated input power</b>          | <b>W</b>           | max. 2300               |
| <b>Standard nominal width</b>     |                    | ID 40                   |
| <b>Cable length</b>               | <b>m</b>           | 7.5                     |
| <b>Sound pressure level</b>       | <b>dB(A)</b>       | 76                      |
| <b>Colour</b>                     |                    | silver                  |
| <b>Weight without accessories</b> | <b>kg</b>          | 19                      |
| <b>Weight incl. packaging</b>     | <b>kg</b>          | 26                      |
| <b>Dimensions (L × W × H)</b>     | <b>mm</b>          | 580 × 510 × 995         |

### Equipment

|                                  |                      |                          |
|----------------------------------|----------------------|--------------------------|
| <b>Suction hose</b>              | <b>m</b>             | 2.5 / with bend          |
| <b>Suction tube</b>              | <b>Piece(s) × mm</b> | 2 × 550 / Steel, chromed |
| <b>Wet/dry floor nozzle</b>      | <b>mm</b>            | 360                      |
| <b>Crevice nozzle</b>            |                      | ■                        |
| <b>Cartridge filter</b>          |                      | Paper                    |
| <b>Drain hose</b>                |                      | ■                        |
| <b>Stainless steel container</b> |                      | ■                        |

■ Included in the scope of supply.



### Robust and easy to transport

- Extremely mobile on all surfaces thanks to the robust chassis, large wheels and metal castors.
- The standard push handle ensures convenient transport.



### Excellent suction power

- 2 powerful turbines ensure outstanding suction power.
- The strong suction power ensures excellent cleaning results and the utmost efficiency.



### Drain hose

- Easily accessible drain hose for convenient liquid disposal.

## ACCESSORIES FOR NT 90/2 ME CLASSIC EDITION

### 1.667-700.0



|  |    | Order no.   | Description   |   |
|--|----|-------------|---|---|
| <b>CARTRIDGE FILTER, STANDARD, UP TO BIA C, DUST CLASS M</b>   |    |             |   |   |
| <b>Cartridge filter paper</b>  |    |             |   |   |
| Cartridge filter, paper  | 1  | 6.907-038.0 | Paper cartridge filter (M BIA-C dust class M), suitable as a main filter for dry and wet pick up.   | ■ |
| <b>BENDS</b>   |    |             |   |   |
| <b>Bend, plastic</b>   |    |             |   |   |
| Bend, NT, DN 40, plastic, clip 1.0 at hose end, cone at accessory end  | 2  | 5.031-904.0 | DN 40 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end, and a cone connection at the accessory end.  | ■ |
| <b>SUCTION NOZZLES</b>   |    |             |   |   |
| <b>Floor nozzles</b>   |    |             |   |   |
| Wet/dry floor nozzle, standard plastic, DN 40  | 3  | 6.907-408.0 | Multi-purpose nozzle (ID 40), plastic, 360 mm working width. With side rollers, brush strips (6.905-878.0) and squeegees (6.905-877.0).   | ■ |
| <b>Crevice nozzles</b>   |    |             |   |   |
| Crevice nozzle, NT, DN 40, plastic, 300 mm   | 4  | 9.770-877.0 | Plastic.  | ■ |
| <b>Car cleaning nozzles</b>  |    |             |   |   |
| Car nozzle, ID 40, 90 mm   | 5  | 6.900-952.0 | For retrofitting older Kärcher wet and dry vacuum cleaner models with bends in DN 40: Flat angled, convenient, plastic car cleaning nozzle with a working width of approx. 90 mm.                 | □ |
| <b>SUCTION TUBES</b>   |    |             |   |   |
| <b>Suction tubes, metal</b>  |    |             |   |   |
| Suction tube, NT, DN 40, 550 mm long, chrome-plated steel, suitable for: NT 50/1, NT 50/2, NT 65/2, NT 70/2, NT 75/2, NT 90/2, NT 611, NT 802 IV | 6  | 6.900-275.0 | The suction tube made of chrome-plated steel with DN 40 and 550 mm long is suitable for wet and dry vacuum cleaners from Kärcher.   | ■ |
| <b>SUCTION HOSES</b>   |    |             |   |   |
| <b>Suction hoses with clip system 1.0 (compatible with vacuum cleaners up to model year 2016)</b>  |    |             |   |   |
| Suction hose, NT, DN 40, length 2.5 m, clip 1.0, bayonet 1.0   | 7  | 9.755-475.0 | The suction hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners.   | ■ |
| <b>FILTER BAGS</b>   |    |             |   |   |
| <b>Fleece filter bags</b>  |    |             |   |   |
| Fleece filter bags, 5 × , NT 65, NT 70, NT 72, NT 75, NT 90  | 8  | 2.885-753.0 | Tear-resistant fleece filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.  | □ |
| <b>Paper filter bags</b>   |    |             |   |   |
| Paper filter bags, 5 × , NT 48, NT 65, NT 70, NT 72, NT 75, NT 80, WET VAC   | 9  | 6.904-285.0 | Premium 3-layer paper filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.  | □ |
| <b>OTHER ACCESSORIES NT</b>  |    |             |   |   |
| Cyclone preseparator CS 40 Me  | 10 | 2.863-026.0 | The highly efficient CS 40 Me cyclone preseparator for all Kärcher wet and dry vacuum cleaners is a specially designed accessory for fine dust applications on construction sites or in industry. | □ |

■ Included in the scope of supply. □ Available accessories.

## BD 38/12 C BP PACK LI

Lightweight, quiet and agile: the BD 38/12 C scrubber drier with disc head is fitted with a fast rechargeable, high-performance lithium-ion battery and ecoefficiency mode.



Made in Europe



**Order no.** 1.783-430.0

- Lithium-ion battery
- With disc brush (for smooth surfaces)
- Energy-saving ecoefficiency mode

### Technical data

|   |                        |                           |
|---|------------------------|---------------------------|
| <b>EAN code</b>                         |                        | 4039784944541             |
| <b>Drive type</b>                       |                        | Battery                   |
| <b>Traction drive</b>                   |                        | Advance by brush rotation |
| <b>Working width of brushes</b>         | mm                     | 380                       |
| <b>Working width, vacuuming</b>         | mm                     | 480                       |
| <b>Tank of fresh/dirty water</b>        | l                      | 12 / 12                   |
| <b>Theoretical area performance</b>     | m <sup>2</sup> /h      | 1520                      |
| <b>Practical area performance</b>       | m <sup>2</sup> /h      | 1140                      |
| <b>Battery type</b>                     |                        | Li-Ion                    |
| <b>Battery</b>                          | V / Ah                 | 25.2 / 21                 |
| <b>Battery runtime</b>                  | h                      | max. 1.5                  |
| <b>Battery charging time</b>            | h                      | approx. 2.7               |
| <b>Power supply for battery charger</b> | V / Hz                 | 220 - 240 / 50 - 60       |
| <b>Brush rotational speed</b>           | rpm                    | 180                       |
| <b>Brush contact pressure</b>           | g/cm <sup>2</sup> / kg | 25 - 30 / 16 - 20         |
| <b>Aisle turning width</b>              | mm                     | 1050                      |
| <b>Water consumption</b>                | l/min                  | 1                         |
| <b>Sound pressure level</b>             | dB(A)                  | 65                        |
| <b>Total permissible weight</b>         | kg                     | 48                        |
| <b>Weight without accessories</b>       | kg                     | 36                        |
| <b>Dimensions (L × W × H)</b>           | mm                     | 995 × 495 × 1090          |
| <b>Colour</b>                           |                        | anthracite                |

### Equipment

|  |   |
|--|---|
| <b>Disc brush</b>                            | ■ |
| <b>2-tank system</b>                         | ■ |
| <b>Battery and built-in charger included</b> | ■ |
| <b>Transport wheels</b>                      | ■ |
| <b>Squeegee, curved</b>                      | ■ |

■ Included in the scope of supply.

Users must receive training on this device.



## Reliable disc technology

- Excellent cleaning power on smooth floor coverings.
- Suitable for use with brushes and pads.
- Brush included in scope of delivery.



## High-performance lithium-ion battery

- Completely maintenance-free despite a service life that is three times longer than conventional batteries.
- Quick charging (full in three hours, half full in one hour).
- Interim or partial charging is also possible where necessary.



## Incl. powerful built-in charger

- The charger is always there; charging is always possible.
- Can be fully recharged in three hours or semi-charged in one hour. (Interim charges possible at any time.)
- Charger automatically switches itself off. No energy consumption in standby operation.

## ACCESSORIES FOR BD 38/12 C BP PACK LI

### 1.783-430.0



|  |    | Order no.   | Description  |   |
|--|----|-------------|--|---|
| <b>SQUEEGEES AND SQUEEGEE BLADES</b>                 |    |             |  |   |
| <b>Squeegee blades</b>                               |    |             |  |   |
| Squeegee blades, oil-resistant, slotted, 690 mm      | 1  | 4.037-118.0 | The suction lip is made of wear-resistant, long-lasting, oil-resistant polyurethane.   | ■ |
| Squeegee blades, Linatex®, 690 mm                    | 2  | 4.037-130.0 | Best wiping and suction results: The Linatex® suction lip set. Tear-proof quality and ideal for profiled floor coverings.  | □ |
| <b>TRACTION BATTERIES AND CHARGERS</b>               |    |             |  |   |
| <b>Batteries</b>                                     |    |             |  |   |
| Battery Li-Ionen 25,7V / 22Ah, 25,7 V, 22 Ah, Li-Ion | 3  | 6.654-491.0 | Extremely lightweight and long-lasting battery. Partial charging possible at any time. Fast-charging capability.   | ■ |
| <b>DISC BRUSHES</b>                                  |    |             |  |   |
| Disc brush, medium, red, 385 mm                      | 4  | 6.907-151.0 | Red standard disc brush for regular maintenance cleaning.  | ■ |
| Disc brush, very soft, White, 385 mm                 | 5  | 6.907-154.0 | White, soft disc brush for the gentle cleaning of sensitive floor coverings.   | □ |
| Disc brush, soft, natural, 385 mm                    | 6  | 6.907-153.0 | Natural-coloured, soft disc brush for cleaning and polishing textured floor coverings.   | □ |
| Disc brush, hard, Black, 385 mm                      | 7  | 6.907-152.0 | Black, very abrasive disc brush for the deep cleaning of hard-wearing floor coverings with very sticky dirt.   | □ |
| <b>DISC PADS / PAD DRIVE BOARDS</b>                  |    |             |  |   |
| <b>Microfibre pad</b>                                |    |             |  |   |
| Microfibre pad, White, 356 mm, 5 x                   | 8  | 6.905-060.0 | Microfibre disc pad for the reliable and gentle removal of grey haze. Ideal for fine stoneware tiles.  | □ |
| <b>Pads</b>  |    |             |  |   |
| Pad, medium-soft, red, 356 mm, 5 x                   | 9  | 6.369-003.0 | Red, standard disc pad for regular maintenance cleaning.   | □ |
| Pad, medium-hard, green, 356 mm, 5 x                 | 10 | 6.369-002.0 | Green, abrasive roller pad for deep cleaning, as well as the removal of sticky dirt.   | □ |
| Pad, hard, Black, 356 mm, 5 x                        | 11 | 6.369-001.0 | Black, very abrasive disc pad for the deep cleaning of hard-wearing floor coverings with very sticky dirt.   | □ |
| <b>Pad drive boards</b>                              |    |             |  |   |
| Pad drive board, 355 mm                              | 12 | 6.907-150.0 | For cleaning with pads. With quick-changing coupling and center lock.  | □ |
| <b>Diamond pad</b>                                   |    |             |  |   |
| Diamond pad, coarse, White, 356 mm, 5 x              | 13 | 6.371-250.0 | White, coarse diamond disc pad for hard floor coverings. Removes minor scratches and creates a clean, even matt base for further treatment with yellow diamond disc pad. | □ |
| Diamond pad, medium, Yellow, 356 mm, 5 x             | 14 | 6.371-251.0 | Yellow, diamond disc pad for treating and maintaining hard floor coverings. For a silky matt surface which can then be polished with the green diamond disc pad.         | □ |

■ Included in the scope of supply. □ Available accessories.

## ACCESSORIES FOR BD 38/12 C BP PACK LI

### 1.783-430.0



|  |    | Order no.   | Description  |                          |
|--|----|-------------|--|--------------------------|
| <b>DISC PADS / PAD DRIVE BOARDS</b>      |    |             |  |                          |
| <b>Diamond pad</b>                       |    |             |  |                          |
| Diamond pad, fine, green, 356 mm, 5 x    | 15 | 6.371-235.0 | Green, fine diamond disc pad for polishing polishable floor coverings. Creates high-gloss surfaces and can also be used for crystallisation.   | <input type="checkbox"/> |
| <b>OTHER ACCESSORIES SCRUBBER DRIERS</b> |    |             |  |                          |
| <b>Miscellaneous</b>                     |    |             |  |                          |
| Linatex splash guard                     | 16 | 5.039-522.0 | Prevents the cleaning water from splashing and, therefore, ensures a consistent cleaning result. On tear-resistant Linatex.  | <input type="checkbox"/> |
| Filling hose                             | 17 | 6.680-124.0 | 1,500-mm filling hose for easy device filling from a water tap. With universal tapered fitting for all standard taps.  | <input type="checkbox"/> |
| <b>Dosing aids</b>                       |    |             |  |                          |
| DS 3 Cleaning Agent Dosing Station       | 18 | 2.641-811.0 | After connecting to a tap, cleaning agent can be filled into the fresh water tank and diluted as required. Can also be used with the filling system attachment kit. Includes backflow preventer (DIN EN 1717). | <input type="checkbox"/> |
| <b>KITS</b>                              |    |             |  |                          |
| <b>Fleet mounting kit</b>                |    |             |  |                          |
| Attachment kit Plug-in Connect Module    | 19 | 2.644-391.0 | The IoT module* is used to transmit information on the location and operating hours of battery-powered Kärcher cleaning machines and third-party devices to the equipment management system.                   | <input type="checkbox"/> |
| <b>SPRAY UNITS</b>                       |    |             |  |                          |
| Pump spray bottle                        | 20 | 6.394-409.0 | 1-litre pump spray bottle - including pump and pressure tank - easy, uniform spraying for cleaning or crystallising.   | <input type="checkbox"/> |

■ Included in the scope of supply.  Available accessories.

## FLEECE FILTER BAGS KFI 117

Designed for the battery-powered WD 1 Compact Battery wet and dry vacuum cleaner: The 3-ply fleece filter bag for long-lasting suction power and outstanding dust retention.



**Order no.** 2.863-325.0

### Technical data

|                               |           |                 |
|-------------------------------|-----------|-----------------|
| <b>EAN code</b>               |           | 4054278926315   |
| <b>Colour</b>                 |           | White           |
| <b>Weight</b>                 | <b>kg</b> | 0.1             |
| <b>Weight incl. packaging</b> | <b>kg</b> | 0.2             |
| <b>Dimensions (L × W × H)</b> | <b>mm</b> | 550 × 100 × 120 |



Suitable for the Kärcher battery-powered  
**WD 1 Compact Battery** wet and dry  
vacuum cleaner

Tear-resistant fleece material that is  
especially suited to demanding  
applications

3-ply fleece material for excellent dust  
retention and optimum suction power

## COMPATIBLE MACHINES

- WD 1 Compact Battery
- WD 1 Compact Battery Set
- WD 1 Compact Battery Set \*JP
- WD box set \*GB